Request information

PRODUCT SPECIFICATION

TFT-LCD MODULE

Module No: 100339-01

☑ Preliminary Specification

☐ Approval Specification

Designed by	Checked by	Approved by

Final Approval by Customer

Approved by	Comment

For more information, contact us:

WWW.DCLTEK.COM | 1-800-407-8917 | SALES@DCLTEK.COM

※The specification of “TBD” should refer to the measured value of sample . If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.

This document contains confidential and proprietary information of DCL Technologies, Inc. It is provided solely for the recipient's evaluation and may not be reproduced, disclosed, or distributed, in whole or in part, without the prior written consent of DCL Technologies, Inc.

Document Revision History

Version	Contents	Date	Note
V0	Original	2023.05.15	

1.0 General Description

ITEM	STANDARD VALUES	UNITS
LCD type	8.8”TFT	--
Dot arrangement	1280(RGB)×480	dots
Color filter array	RGB vertical stripe	--
Display mode	IPS / Transmissive / Normally Black	--
Viewing Direction	ALL	--
TFT Driver IC	FL5895	--
Surface hardness	6H	--
LCM Outline Dimension	229.00(W)×96.60(H)×4.50(T)	mm
Active area	209.28(W)×78.48(H)	mm
Dot pitch	0.1635x0.1635	mm
Interface	LVDS	--

2.0 Absolute Maximum Ratings

2.1 Electrical Absolute Rating

Parameter	Symbol	Min.	Max.	Unit	Note
Power supply voltage	VCC	3.0	+3.6	V	GND=0
	IOVCC	1.65	+3.3	V	GND=0

2.2 Back-light Unit:

PARAMETER	Sym.	Min.	Typ.	Max.	Unit	Test Condition	Note
LED Current	IF	–	120	–	mA	–	–
LED Voltage	VF	–	23.2	–	V	I=120mA	–
Life Time		–	30000	–	Hr.	I≦120mA	–
Brightness	Luminance	–	1100	--	cd/m2	I=120mA	
Color	White						

Note (1) Permanent damage may occur to the LCD module if beyond this specification. Functional operation should be restricted to the conditions described under normal operating conditions.

(2)Ta=25±2℃

(3)Test condition: LED Current 100mA

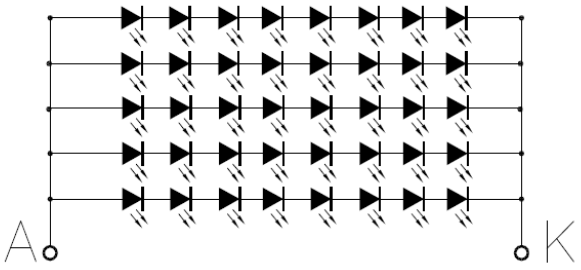

IF=120mA, VF=23.2V(TYP)

3.0 OPTICAL CHARACTERISTICS

3.1 Optical Specification

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Transmittance (with Polarizer)		T (%)	Θ=0 Normal viewing angle	3.15	3.5	—	%	Measuring with polarizer, for reference only Base on Vop=6.2V
Transmittance (without Polarizer)		T (%)		11.40	12.67	—	%	
Contrast Ratio		CR		1100	1300	—	—	(1)(2)
Response Time	25℃	$T_{R+}T_F$		—	—	30	msec	(1)(3)
	-20℃			—	—	300		
	-30℃			—	—	500		
Color Gamut	(%)			65	70	—	%	C-light
Color Chromaticity (CIE1931)	White	W_x		-0.02	0.302	+0.02	—	(1)(4) CF glass C-light
		W_y			0.334			
	Red	R_x			0.654		—	
		R_Y			0.317			
	Green	G_x			0.259		—	
		G_Y			0.574			
	Blue	B_x			0.137		—	
		B_Y			0.087			
Viewing Angle	Hor.	$Θ_L$	CR>10	80	85	—	—	(1)(4) Measuring with polarizer, for reference only
		$Θ_R$		80	85	—		
	Ver.	$Θ_U$		80	85	—		
		$Θ_D$		80	85	—		
Optimal View Direction		Free						(5)

3.2 Measuring Condition

■

15min. warm-up time.

3.3 Measuring Equipment

Note (1) Definition of Viewing Angle:

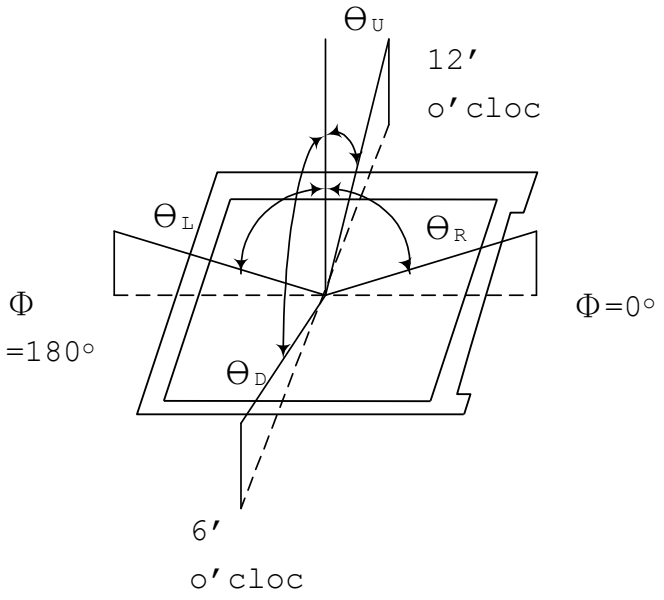

Note (2) Definition of Contrast Ratio (CR) :
measured at the center point of panel

$$CR = \frac{\text{Luminance with all pixels white}}{\text{Luminance with all pixels black}}$$

4.0 LVDS INTERFACE TIMING

4.0.1 VESA DATA MAPPING

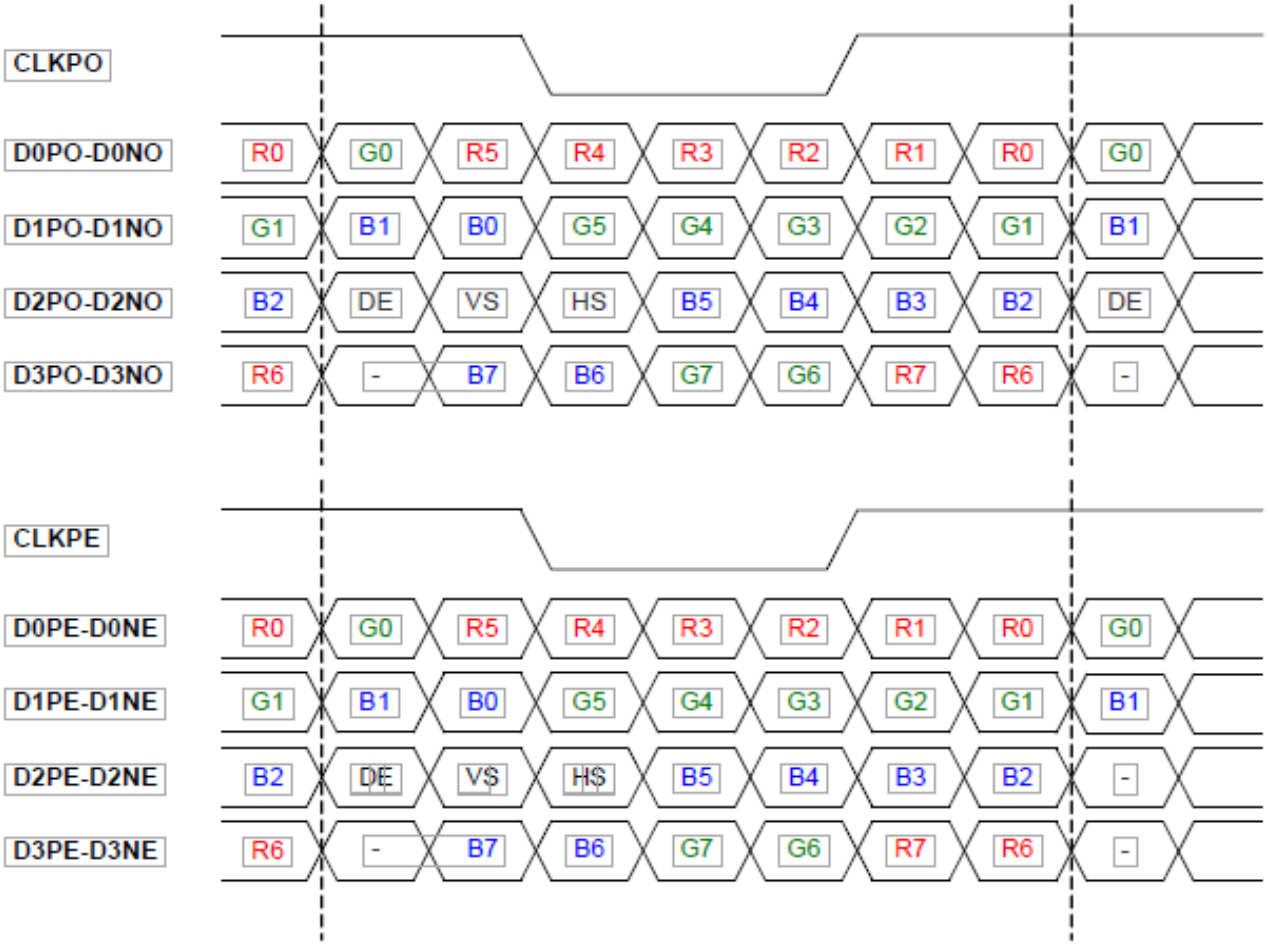

Note:

1. For 6 bit mode, MSB are R/G/B[5] and LSB are R/G/B[0]
2. For 8 bit mode, MSB are R/G/B[7] and LSB are R/G/B[0]
3. For single port LVDS only ODD port (CLKxO and DxxO) are used

4.0.2 LVDS INPUT TIMING

Single/ Dual Port LVDS Interface:

Vertical input timing

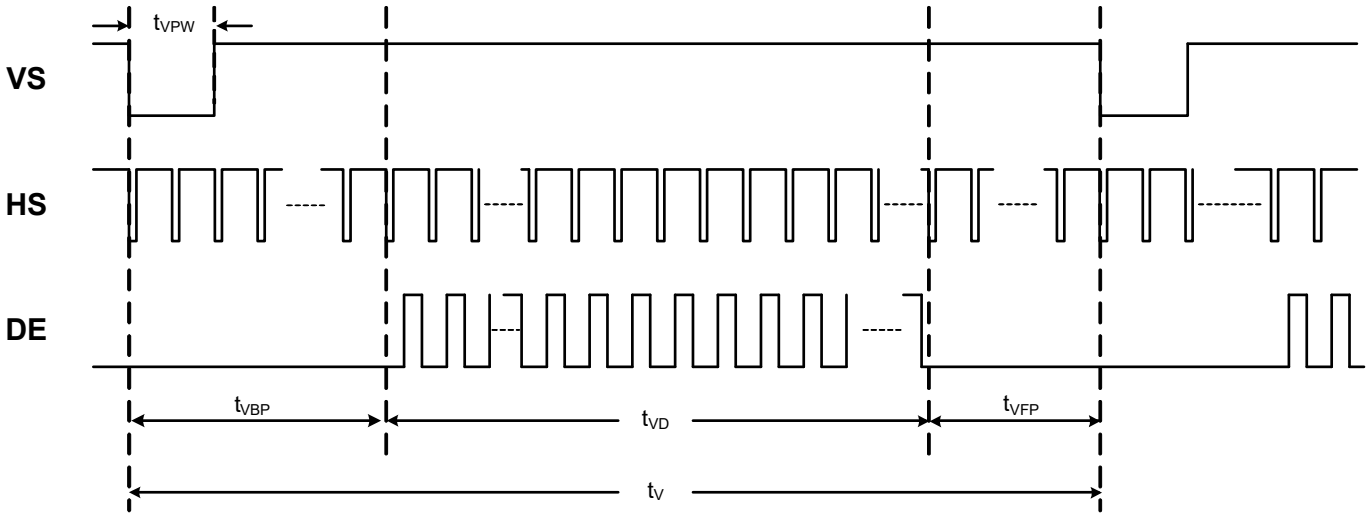

Horizontal input timing

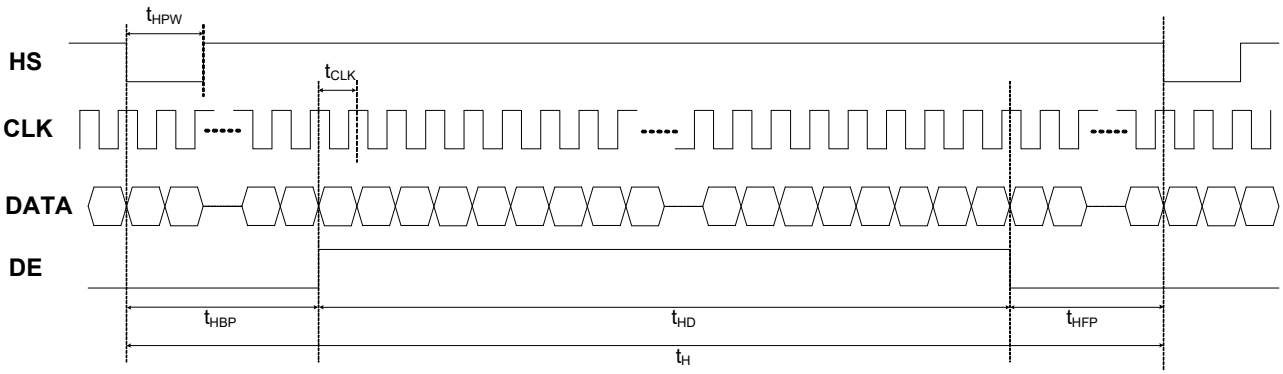

1280x480 (single port LVDS & CMOS) (RES[3:0] = 0111)

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
CLK frequency	t_{CLK}	39.1	40.1	50.3	Mhz
Horizontal display area	t_{HD}		1280		t_{CLK}
Horizontal pulse width	t_{HPW}	4	12	253	t_{CLK}
Horizontal back porch	t_{HBP}	5	16	255	t_{CLK}
Horizontal front porch	t_{HFP}	50	50	245	t_{CLK}
Horizontal period	t_H	1335	1346	1664	t_{CLK}
Vertical display area	t_{VD}		480		t_H
Vertical pulse width	t_{VPW}	1	3	98	t_H
Vertical back porch	t_{VBP}	4	8	100	t_H
Vertical front porch	t_{VFP}	4	8	106	t_H
Vertical period	t_V	488	496	504	t_H
Frame rate	FR	60	60	60	Hz

5.0 Interface Pin Connection

(Input signal): FPC Down Connector, (FH19SC-40S-0.5SH (HIROSE), 50pin, pitch = 0.5mm)

Pin No.	Symbol	I/O	Function	Remark
1	NC	P	No connection	
2	VDD	P	Power Voltage for digital circuit	
3	VDD	P	Power Voltage for digital circuit	
4	NC	---	No connection	
5	Reset	I	Global reset pin	
6	STBYB	I	Standby mode, Normally pulled high STBYB = “1”, normal operation STBYB = “0”, timing controller, source driver will turn off, all output are High-Z	
7	GND	P	Ground	
8	RXIN0-	I	- LVDS differential data input	
9	RXIN0+	I	+ LVDS differential data input	
10	GND	P	Ground	
11	RXIN1-	I	- LVDS differential data input	
12	RXIN1+	I	+ LVDS differential data input	
13	GND	P	Ground	
14	RXIN2-	I	- LVDS differential data input	
15	RXIN2+	I	+ LVDS differential data input	
16	GND	P	Ground	
17	RXCLKIN-	I	- LVDS differential clock input	
18	RXCLKIN+	I	+ LVDS differential clock input	
19	GND	P	Ground	
20	RXIN3-	I	- LVDS differential data input	
21	RXIN3+	I	+ LVDS differential data input	
22	GND	P	Ground	
23	NC	---	No connection	
24	NC	---	No connection	
25	GND	P	Ground	
26	NC	---	No connection	

27	NC	---	No connection	
28	SELB	I	6bit/8bit mode select	Note1
29	NC	P	No connection	
30	GND	P	Ground	
31	LED-	P	LED Cathode	
32	LED-	P	LED Cathode	
33	L/R	I	Horizontal inversion	Note3
34	U/D	I	Vertical inversion	Note3
35	NC	P	No connection	
36	NC	P	No connection	
37	NC	P	No connection	
38	NC	P	Gate ON Voltage	
39	LED+	P	LED Anode	
40	LED+	P	LED Anode	

Note() Selection of scanning mode (please refer to the following table)

Setting of scan control input		**IN/OUT state for start pulse**				**Scanning direction**
U/D	L/R	STVD	STVU	STHR	STHL	
GND	DV_{DD}	Output	input	output	input	up to down, and from left to right
DV_{DD}	GND	input	output	input	output	down to up, and from right to left
GND	GND	output	input	input	output	up to down, and from right to left
DV_{DD}	DV_{DD}	input	output	output	input	down to up, and from left to right

Note() MOD=H: Simultaneous sampling.(Please check CPH2 and CPH3 to GND when MOD=H)
MOD=L: Sequential sampling.

6.0 Outline dimension

This document contains confidential and proprietary information of DCL Technologies, Inc. It is provided solely for the recipient's evaluation and may not be reproduced, disclosed, or distributed, in whole or in part, without the prior written consent of DCL Technol

Front View

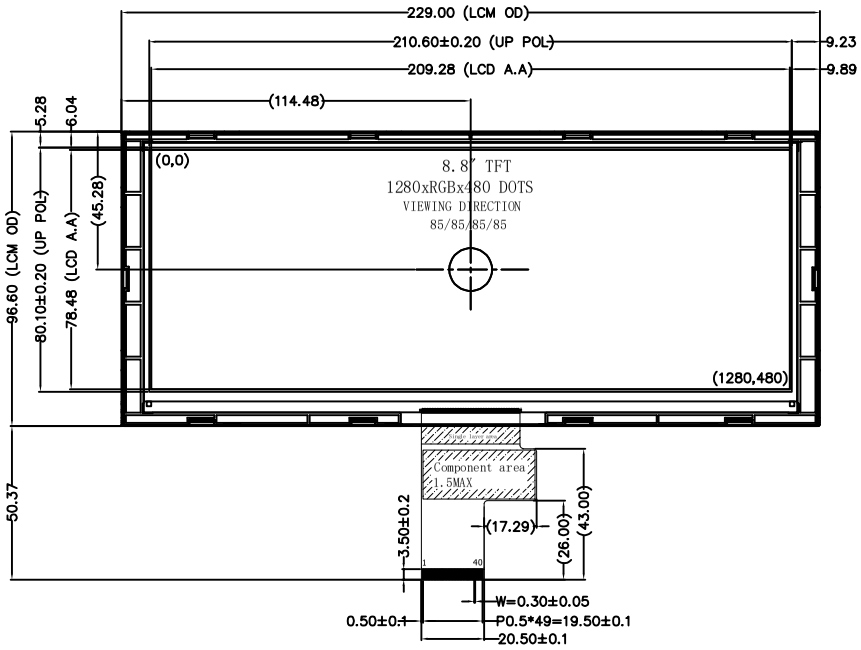

Side View

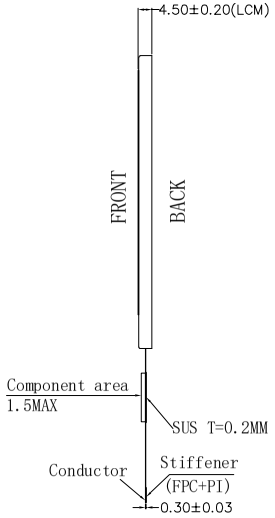

Back View

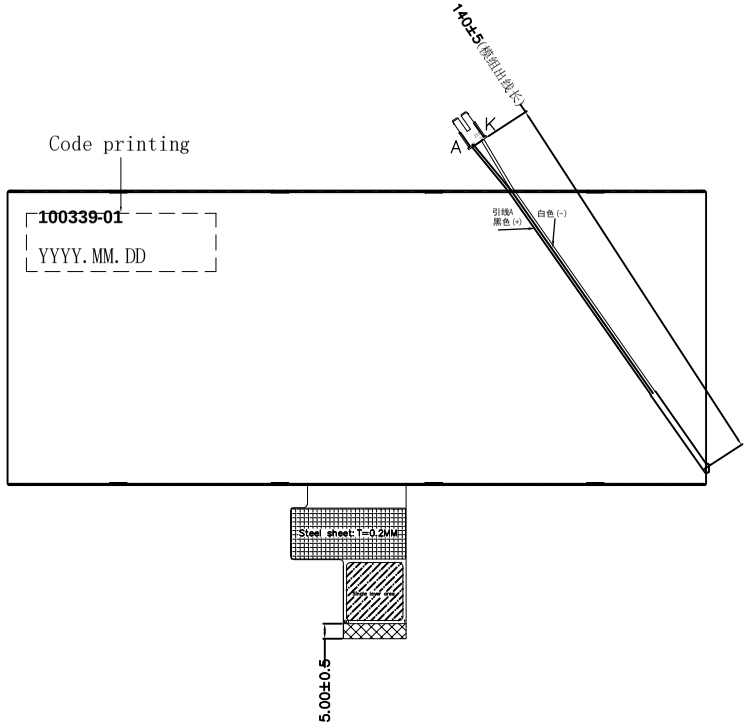

Notes:

1. Display : 8.8″, TFT
2. Resolution: 1280xRGBx480
3. LCD Viewing Direction: ALL,
4. Drive IC:FL5895
5. Display Mode: Normally Black/Transmissive
6. LCM Bringhtness: 1100cd/㎡(TYP),uniformity≥75%
7. unmark Tolerance:±0.3
8. OPERATING TEMP: -20° C~ +70° C
9. STORAGE TEMP: -30° C~ +70° C
10. Requirements on Environmental Protection: RoHS



IF=120mA, VF=23.2V(TYP)

REV	DESCRIPTION	DATE	NAME
3			
2			
1			
0	NEW	2023.05.15	

DCLTEK

SCALE:1/1	UNIT:mm	PAGE:1/1		Approve	Check
Part No:	100339-01		VER:V0		
Customer No:					

SALES@DCLTEK.COM
WWW.DCLTEK.COM
DCLTEK

7.0 Reliability test items

NO	Item	Conditions	Remark
1	High Temperature Storage	Ta=+70℃,48hrs	
2	Low Temperature Storage	Ta=-30℃,48hrs	
3	High Temperature Operation	Ta=+70℃,48hrs	
4	Low Temperature Operation	Ta=-20℃,48hrs	
5	High Temperature and High Humidity (operation)	Ta=+50℃,90%RH,48hrs	
6	Thermal Cycling Test (non operation)	-20℃(0.5hr)→+60℃(0.5hr),100cycles	

Note: All tests above are practiced at module type.
There is no display function NG issue occurred, All the cosmetic specification is judged before the reliability stress.

8.0 Packing form

TBD

深圳市丽台电子有限公司

Quality inspection standards

品质允收标准

MODEL No. / 产品型号： **Applies 5.0~9.0 TFT-LCD Panel**
UPDATED DATE / 生效日期： **2022-05-20**
VERSION / 版 本： **A0**
Customer Signature/客户签字： _____

RECORD OF REVISION/修订履历：

Version 版本	Revision Record 修订内容	Compile 修订者	Date of Revision 修订日期
V0	首发/Starting	Green	2022.05.20

1.Scope 1适用范围

This document shall be applied to 5.0~9.0 TFT-LCD Panel.

本文件适用于5.0~9.0 TFT-LCD Panel.

2.Inspection and Environment onditions/检查条件与环境

2. 1 Inspection Conditions 检查条件:

(1) Inspection Distance检测距离: 35 cm±5cm

(2) Each picture /每个画面：2~3 secs/秒，Cosmetic Inspection/外观10~12 secs/秒

(3) View Angle观看角度:

Light-on Inspection Angle点灯检验角度 ： ±45°

Cosmetic Inspection Angle外观检验角度 ： ±45°

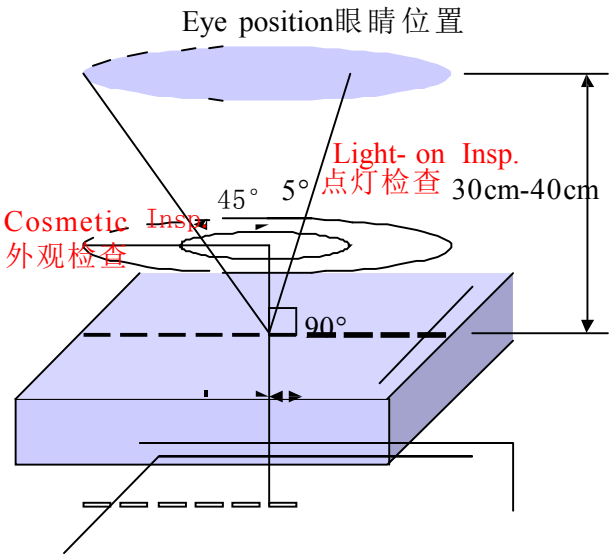

(Perpendicular to LCD panel surface垂直于液晶显示表面)

2.2 Environment Conditions环境条件:

Ambient Temperature 温度		25℃±5℃
Ambient Humidity 湿度		55±5%RH
Ambient Illumination 亮度	Cosmetic Inspection 外观检验	800-1000 Lux
	Functional Inspection 点灯检验	200~300Lux

2.3 Sampling Conditions 抽样条件:

(1) Lot Size： Quantity of shipment lot per model/.

批量：单次运送单一机型数量

(2) Sampling Method ：
抽样方法：

Sampling Plan 抽样计划		GB2828/2003
		Normal Inspection, Single Sampling 正常检验、单次抽样
		Geneal II Inspection 普通二级
AQL	Major Defect 主要缺点	0.25
	Minor Defect 次要缺点	0.65

(3) The classification of Major(MA) and Minor(MI) defects is shown as 3. Inspection Criteria.
主缺(MA)及次缺(MI)定义于”3.检查标准”

3.Terms and Definitions/术语和定义

3.1 Classification of defects缺陷的分类:

Major defects: A major defect is a defect that is likely to result in failure, or to reduce materially the usability of the product for its intended purpose.

主要缺陷：会导致产品功能失效或减少产品可用性的缺陷。

Minor defects: A minor defect either is a defect that is not likely to reduce materially the usability of the product for its intended purpose, or is a departure from an established having little bearing on the effective use or operation of the product.

次要缺陷：不会导致产品功能失效，不会减少产品的有效使用和操作。

3.2 Extraneous substances that can be wiped out ,like Finger point,Particles are not cnsidered as a defect . 可以被擦拭干净的表面物质不视为缺陷 (如手指印，尘粒) 。

3.3 Defects on the Black Matraix(outside ofActive Area) are not considered as a defect . BM 区域 (AA 区以外) 的缺陷不视为缺陷。

3.4 Size of circular defect,is defined by diameter”D” 。The defect average diameter D=1/2(W+L) 圆形缺陷的大小是由直径 D 定义的。缺陷的平均直径 D=1/2(W+L)

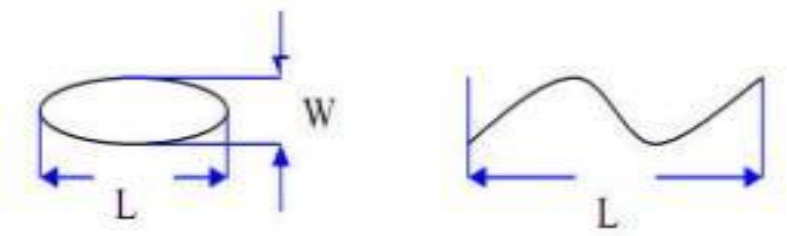

3.5 When defect size L≥2W,the defect count as liner type defect.Size of linear defect is defined by length(L) and the maximum width(W).

当缺陷尺寸 L≥2W 时，被视为线状缺陷。线状缺陷是由长度 (L) 和最大宽度 (W) 定义的。 3.6 3.6 Mura criteria :judged by ND filter6%,and can't be seen under at ND filter 6% .

3.6 MURA 判断标准：使用 ND6%判定，且透过 ND6%，遮住不可见.

3.7 Dot defect is defind as the defective area of the dot is larger than 50% of the dot area and is visible through 6% ND filter

DOT 定义为点缺陷面积大于 50% DOT 面积, 且透过 ND6%遮住是可见的.

The drawing of 1/2 area sub-pixel definition: The 1/2 area sub-pixel can be defined as below one or more of specific shapes

1/2 面积的子像素定义绘图：1 / 2 面积的子像素可以定义为如下一个或多个特定形状图：

3.8 A dot defect that is smaller than the defined dot defect will be treated as small bright dot. 细碎亮点：小于"DOT 定义"的点缺陷视为细碎亮点。

I 区与 O 区比例：1：2：1

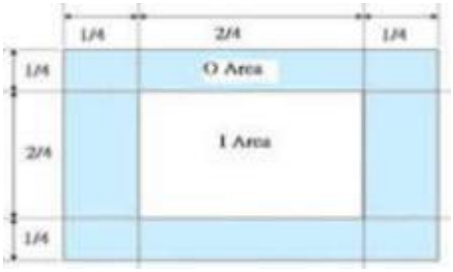

3.9 Inspection method of ND Filter - holding ND filter in front of the panel around 5cm and examine the panel from 35±5 cm in the front view for 2~3 second.

ND 卡的检查方法：在面板上方大约 5CM 处握住 ND 卡，眼睛距离面板 30-40CM，通过 2~3 秒观察。

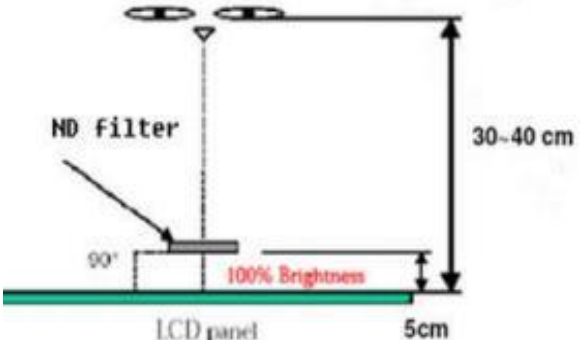

4. Inspection Criteria 检验标准

4.1 Appearance Inspection specification 外观检查规格:

Judge area 区域	Judge item 项目	Specification inspection 检查规格	Judge criterion	
			Major	Minor
Silicone 硅胶	Silicone spread 硅胶涂布	The height can't over C/F , color filter , or gomu 高度不能过超 C/F		MI
	Silicone residue 硅胶残余	Can't cover polarizer, FPC …etc. 不能覆盖 POL, FPC 等		MI
LCD 玻璃	Wire(on Array) 线路	No damage 不能损伤	MA	
	Edge 边缘	No extended crack 不可有延伸性裂纹	MA	
PCBA Connector FPC/FFC	Appearance 外观	Scratch or damage result in copper expose is not allowed 划伤或损伤不允许导致出现露铜		MI
	Component 零件	No damage 不能损伤	MA	
	Connection status 连接状况	Need correct connection 需要正确连接	MA	
	Broken 破裂	Not allowable 不允许	MA	
	Folding sign 对位记号折叠	Not allowable 不允许	MA	
POL 偏光片	Scract on the polarizer 偏光片划伤	1.W≤0.07mm; L≤5mm, Ignore (忽略)		MI
		2.0.07mm<W≦0.15mm ; L≤5mm ; N≤4 ; DS≥10mm		
		3.0. 15mm＜W; 5mm＜ L , Not allowable不允许		

Judge area 区域	Judge item 项目	Specification inspection 检查规格	Judge criterion	
			Major	Minor
POL 偏光片	Dent on the polarizer 偏光片凹痕	1.D＜0. 20mm，Ignore（忽略）		MI
		2.0.20mm＜D≤0.40mm；N≤4；DS≥10mm		
		3.0.40mm＜D，Not allowable不允许		
	POL Linear bubble 线状气泡	1.W≤0.07mm；L≤5mm，Ignore（忽略）		MI
		2.0.07mm<W≦0.15mm ; L≤5mm ; N≤4 ; DS≥10mm		
		3.0. 15mm＜W；5mm＜ L，Not allowable不允许		
	POL dot bubble 点状气泡	1.D＜0. 20mm，Ignore（忽略）		MI
		2.0.20mm＜D≤0.40mm；N≤4；DS≥10mm		
		3.0.40mm＜D，Not allowable不允许		
	POL edge bubble 片边缘气泡	1. The display area is 1/2BM outside，Not allowable 显示区往外 1/2BM 区域内，不允许 2. The display area is outside the outer 1/2BM area，Not allowable 显示区往外1/2BM区域以外，不管控		MI

Judge area 区域	Judge item 项目	Specification inspection 检查规格	Judge criterion	
			Major	Minor
TP&CG	Foreign Material in spot shape 点状异物	1.D≤0.20mm；Ignored（忽略） 2.0.20mm＜D≤0.40mm；N≤4；DS≥10mm 3.D＞0.40mm；Not allowable不允许		MI
	Fisheye/bubbles 鱼眼/气泡	1.D≤0.20mm；Ignored（忽略） 2.0.20mm＜D≤0.40mm；N≤4；DS≥10mm 3.D＞0.40mm；Not allowable不允许		MI
	Scratches on the surface 表面划伤	1.W≤0.07mm；Ignored（忽略） 2.0.07mm<W≤0.15mm，L≤5mm；N≤4；DS≥10mm 3.W＞0.15mm，L＞5mm；Not allowable不允许		MI
	Collapse corner、Crash edge 崩角、崩边	Product front:/产品正面： collapse corners, collapsed edges are not allowed 崩角、崩边不允许； Product back/产品背面： X≤ 0.5 , Y≤0.5，Z≤1/2T；N≤4；DS≥10mm	MA	
	Printed fonts/LOGO 丝印/LOGO	Printed fonts/LOGO clarity、complete、content right 字体/LOGO丝印清晰、完整、内容正确		MI
	Broken 破损	Not allowable不允许	MA	
	Dirty surfaces 表面脏污	Dirt cannot be wiped， Not allowable 不可擦拭的脏污，不允许		MI
	IR hole IR孔	Black spots/黑点： W ≤0.15mm，N≤2，Not visible against a black background/黑色背景下不可见		MI
		IR hole Scratches： 1.W＜0.05mm，Ignored（忽略） （Dense points Not allowable 不允许密集）； 2.0.05mm＜W≤0.07mm；L≤2mm；N≤2； 3.W＞0.07mm，L＞2mm，Not allowable 不允许		MI

4.2 Electrical Inspection specification电性检查规格:

Item 项目	Judgment Criteria 判定标准	Judge criterion	
		Major	Minor
LCD Bright /Dark dot 玻璃亮点/暗点	1.D≦0. 20mm， Ignored（忽略），Not dense（不可密集） 2.0.20mm<D≦0.40mm ； N≦4 ； DS≥10mm 3.D＞0.40mm ，Not allowed/不允许		MI
Mura	Invisible through 6% ND filter，200~300Lux 透过ND6% 遮住 ， 目测不可见即为OK， 200~300Lux		MI
Small bright dot 细碎亮点	Not allowed if it can be observed through ND Filter6% 透过ND6%目测看得见，不允许		MI
ZBD Rate 玻璃亮点比率	90:10		MI
Light Leakage 漏光	Invisible through 6% ND filter，OK 透过ND6%遮住目测不可见即为OK If necessary,set up set up Limit Sample. 如果有必要，可制订限度样品		MI
Bubble in Cell (LC Bubble/Actice Area) CELL气泡 (AA区LCD气泡)	Eyes should not find it . 目视观察不可见，视为 OK	MA	

Item 项目	Judgment Criteria 判定标准	Judge criterion	
		Major	Minor
Foreign Material in spot shape 点状异物	1.D≦0.20mm， Ignored（忽略） 2.0.20mm<D≦0.40mm ； N≦4； DS≥10mm 3.D＞0.40mm ， Not allowable/不允许		MI
Foreign Material in line or spiral shape 线状异物	1.W≦0.07mm ， Ignored（忽略） 2. 0.07mm<W≦0.15mm ； L≤5mm ； N≦4 3.W＞0.15mm ； L＞5mm ， Not allowable/不允许		MI
White dot in back-light 白点	1.D≦0. 20mm，Ignored（忽略） 2.0.20mm<D≦0.40mm ； N≦4 ； DS≥10mm 3.D＞0.40mm ， Not allowed/不允许		MI
TP no touch 无触摸	Not allowable 不允许	MA	
Abnormal Disply 显示异常	Not Allowed 不允许	MA	
NO display 无显示	Not Allowed 不允许	MA	
Line Defect 缺线	Not Allowed 不允许	MA	
Angle of view error 视角错误	Not Allowed 不允许	MA	
Tect crostalk 不消失的残影	Not Allowed 不允许	MA	