
SMART DISPLAY MODULE

2.4" QVGA Smart Display with PCAP Touch

Display, controller board and touch in one module — talk to it over UART-TTL and skip the graphics design work.

CATALOG # 1A0130-01

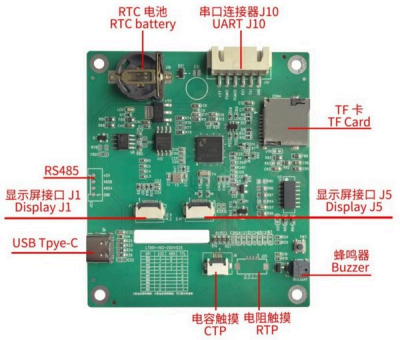

2.4"	180	240×320	UART
DIAGONAL	NITS	QVGA	HOST LINK

KEY FEATURES

- Built-in controller — drive it with simple UART-TTL commands
- Screens, fonts and images stored on board (1GB flash)
- Shortens firmware and UI development time
- Projected capacitive touch included
- -20 to +70 °C operating range
- 5V/2A power input
- Custom UI, enclosure and cable options

SPECIFICATIONS

Size	**2.4" (QVGA)**
Resolution	**240 × 320**
Panel	**TN TFT LCD**
Brightness	**180 cd/m²**
Host Interface	**UART-TTL**
Controller Board	**UART Board**
Touch	**Projected capacitive (PCAP)**
Flash Memory	**1GB(Support 128Mbit~2*1GB)**
Power Supply	**5V/2A**
Active Area	**36.72 × 48.96 mm**
Operating Temp.	**-20 ~ +70 °C**

APPLICATIONS Appliances · Smart home · Industrial controls · Instrumentation · EV chargers

Design it in with DCLTEK.

Samples, custom brightness, cover glass, touch tuning and cable assemblies, backed by US-based engineering and in-country factory oversight.

Request a quote or samples

sales@dcltek.com · 1-800-407-8917
www.dcltek.com

Specifications subject to change without notice.