
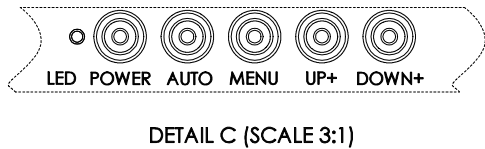
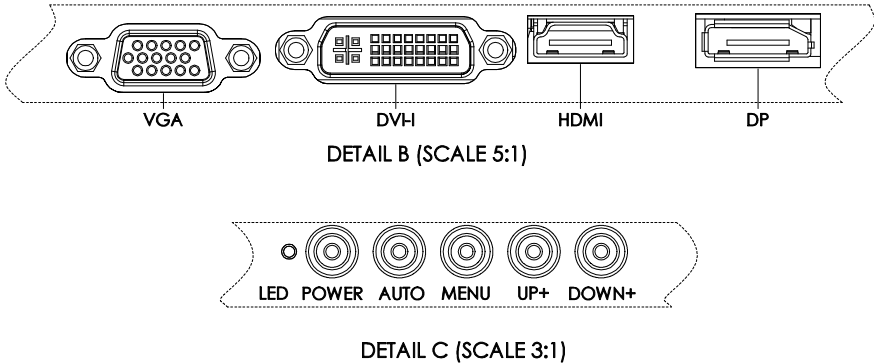
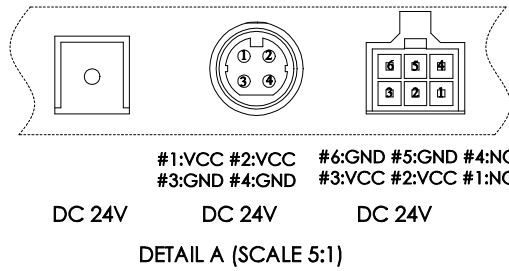
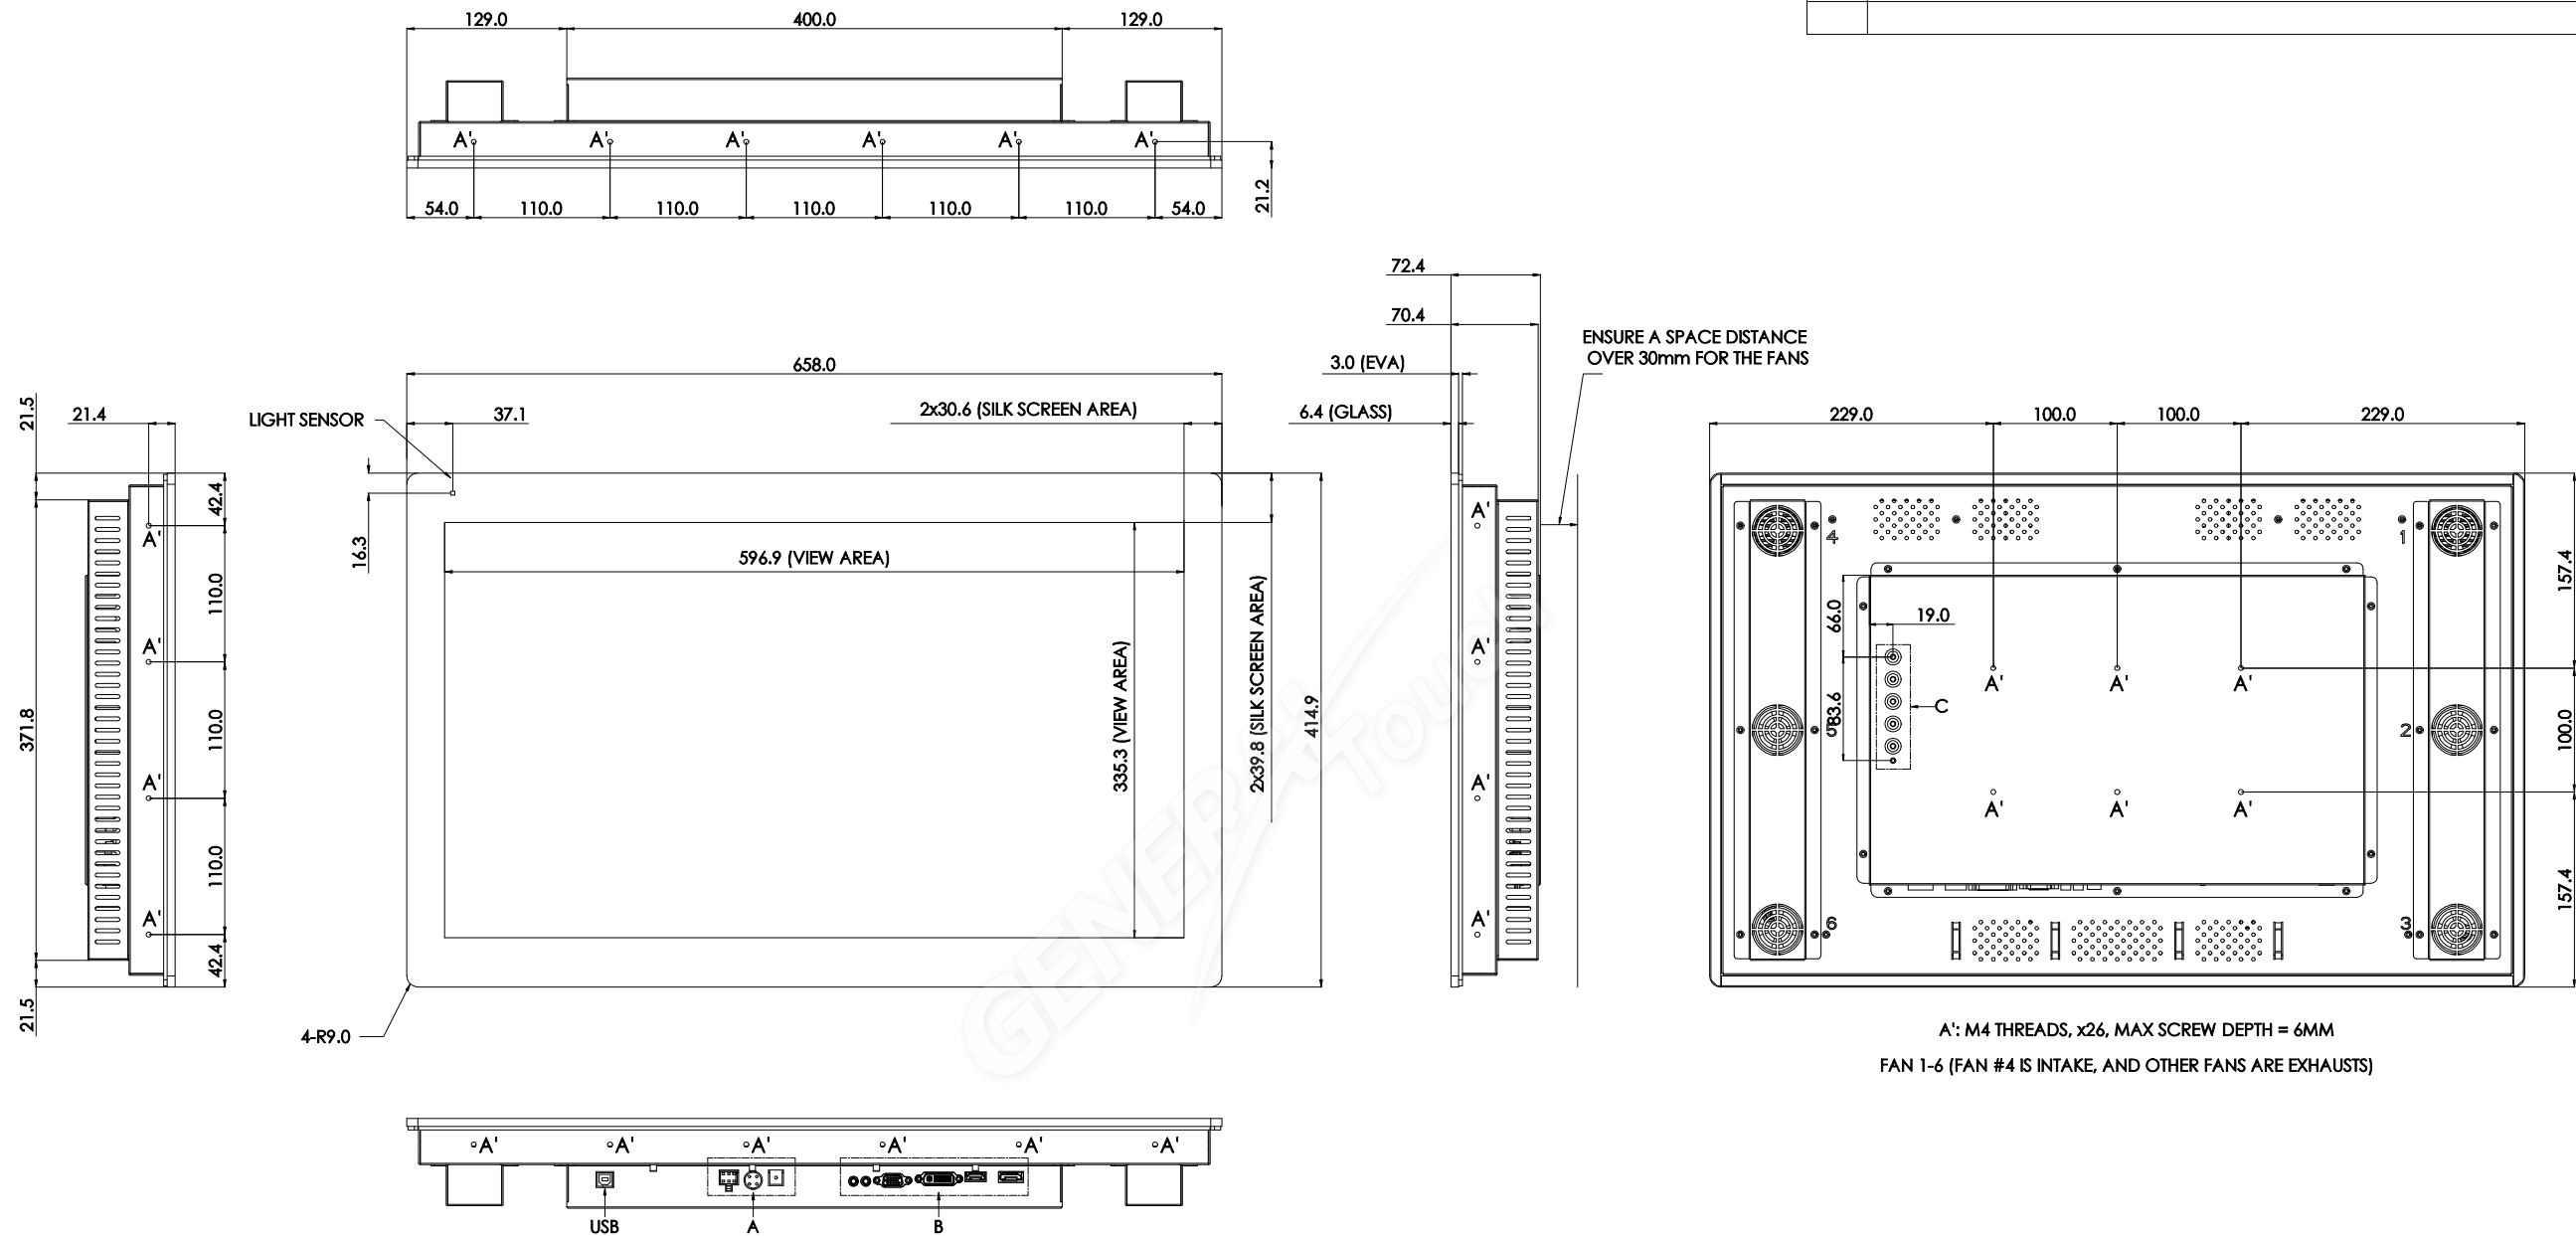


TITLE: RSL276-RC80A0-UDB2L0-1.0

MARK	AMEND	SIGNATURE
△		




GENERAL Touch		General Touch Co.,Ltd.							
SPECIFICATION		OVERALL DIMENSIONS	658.0x414.9x72.4		ANTI-GLARE		Y	☒ N	☐
UNIT	DATE	VIEW AREA	596.9x335.3						DESIGNER:
MM	2025/12/19	GLASS THICKNESS	6.0 MM						Duan Wenbin
PROJECTION:		SILK SCREEN COLOR	BLACK						CHECKED BY:
		MOUNTING	VESA		☒	BRACKET		☒	Zhang Kai
SHEET 1 of 6		NOTES							APPROVED BY:
VER: 1.3		TOUCH TECHNOLOGY	P-CAP		☒	SAW			Zhou Bolin
SCALE: 1:1			NON-TOUCH			RESISTIVE			
TOLERANCE: ±2.0MM									


DO NOT SCALE DRAWING

TITLE: RSL276-RC80A0-UDB2L0-1.0


MARK	AMEND	SIGNATURE
⚠		

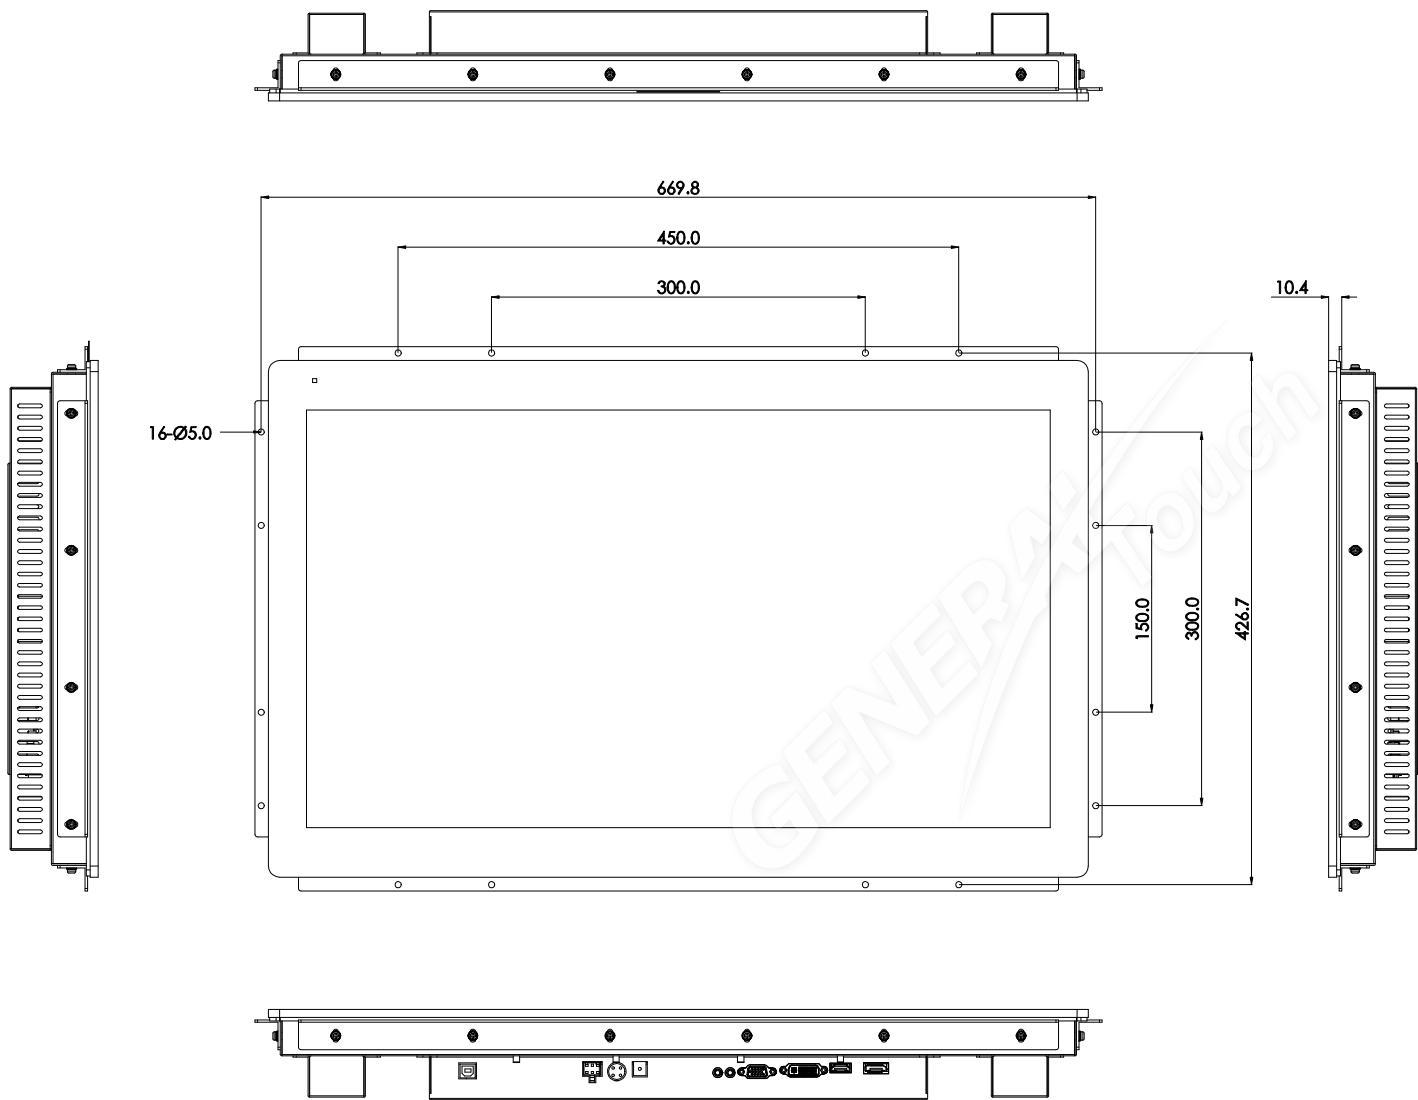

THE MOUNTING BRACKET (X4) ARE OPTIONAL

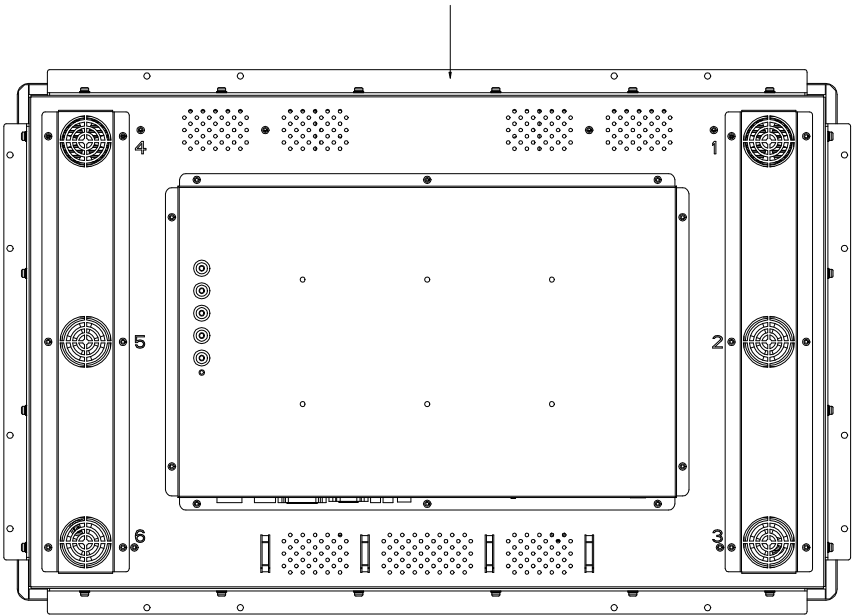

DO NOT SCALE DRAWING


GENERAL Touch		General Touch Co.,Ltd.					
SPECIFICATION		OVERALL DIMENSIONS	658.0x414.9x72.4		ANTI-GLARE	Y ☒ N ☐	DESIGNER: Duan Wenbin
UNIT	DATE	VIEW AREA	596.9x335.3				
MM	2025/12/19	GLASS THICKNESS	6.0 MM				
PROJECTION:		SILK SCREEN COLOR	BLACK				CHECKED BY: Zhang Kai
		MOUNTING	VESA ☒ BRACKET ☒				
SHEET 2 of 6		NOTES					APPROVED BY: Zhou Bolin
VER: 1.3	SCALE: 1:1	TOUCH TECHNOLOGY	P-CAP	☒	SAW		
TOLERANCE: ±2.0MM			NON-TOUCH		RESISTIVE		

CUSTOMER RECOMMENDED MOUNTING GEOMETRY-1


TITLE: RSL276-RC80A0-UDB2L0-1.0

MARK	AMEND	SIGNATURE
⚠		


FRONT VIEW

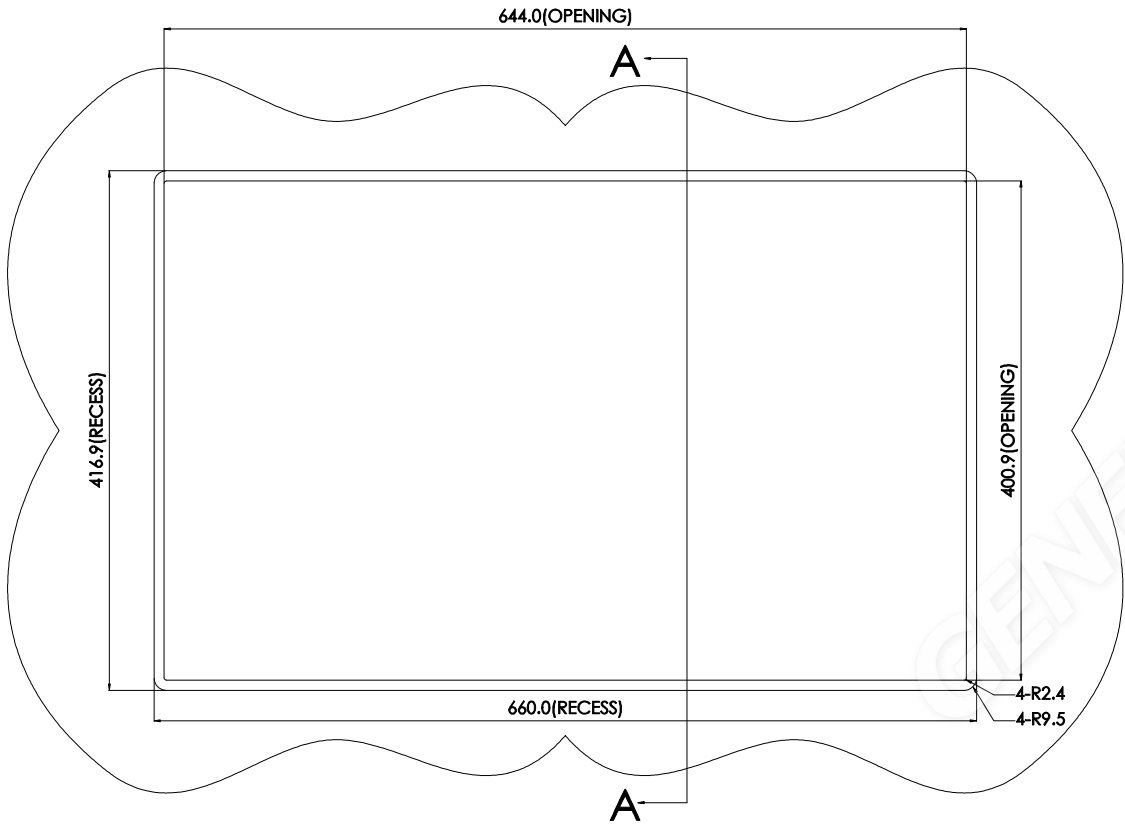

SIDE VIEW

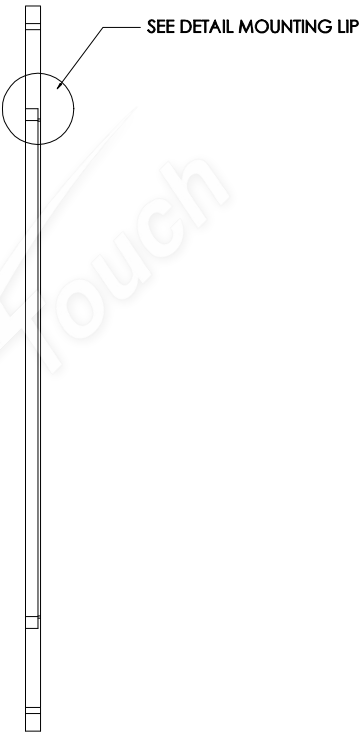


SECTION A-A



DETAIL MOUNTING LIP
SCALE 1:1

DO NOT SCALE DRAWING

GENERAL Touch		General Touch Co.,Ltd.									
SPECIFICATION		OVERALL DIMENSIONS		658.0x414.9x72.4		ANTI-GLARE		Y	☒ N	☐	
UNIT	DATE	VIEW AREA		596.9x335.3						DESIGNER:	
MM	2025/12/19	GLASS THICKNESS		6.0 MM						Duan Wenbin	
PROJECTION:		SILK SCREEN COLOR		BLACK						CHECKED BY:	
		MOUNTING		VESA ☒		BRACKET		☒		Zhang Kai	
SHEET 3 of 6		NOTES									
VER: 1.3	SCALE: 1:1	TOUCH TECHNOLOGY		P-CAP		☒	SAW				APPROVED BY:
TOLERANCE: ±2.0MM				NON-TOUCH				RESISTIVE			


CUSTOMER RECOMMENDED MOUNTING GEOMETRY-1

TITLE: RSL276-RC80A0-UDB2L0-1.0


MARK	AMEND	SIGNATURE
⚠		

FLUSH-MOUNT BRACKET INSTALLATION NOTES:

1. PLACE THE DISPLAY INTO THE ENCLOSURE PANEL
OPENING (SEE SHEET 3 FOR DETAILS OF OPENING
DIMENSIONS).
2. ATTACH FLUSH MOUNTING BRACKETS ON ALL FOUR SIDES
OF DISPLAY WITH HEX HEAD M4x8 BRACKET SCREWS TO
SECURE THE DISPLAY TO THE ENCLOSURE PANEL. APPLY A
FULL CIRCLE OF LIQUIDE SILICONE ALONG THE EDGE WHERE
THE DISPLAY CONTACTS THE DOOR PANEL. ADJUST THE
DISPLAY AS CLOSE AS POSSIBLE TO FLUSH WITH THE FRONT
OF THE ENCLSOURE PANEL BEFORE TIGHTENING M4
BRACKET SCREWS. A SOCKET WRENCH IS RECOMMENDED
IF CLEARANCE IS LIMITED.

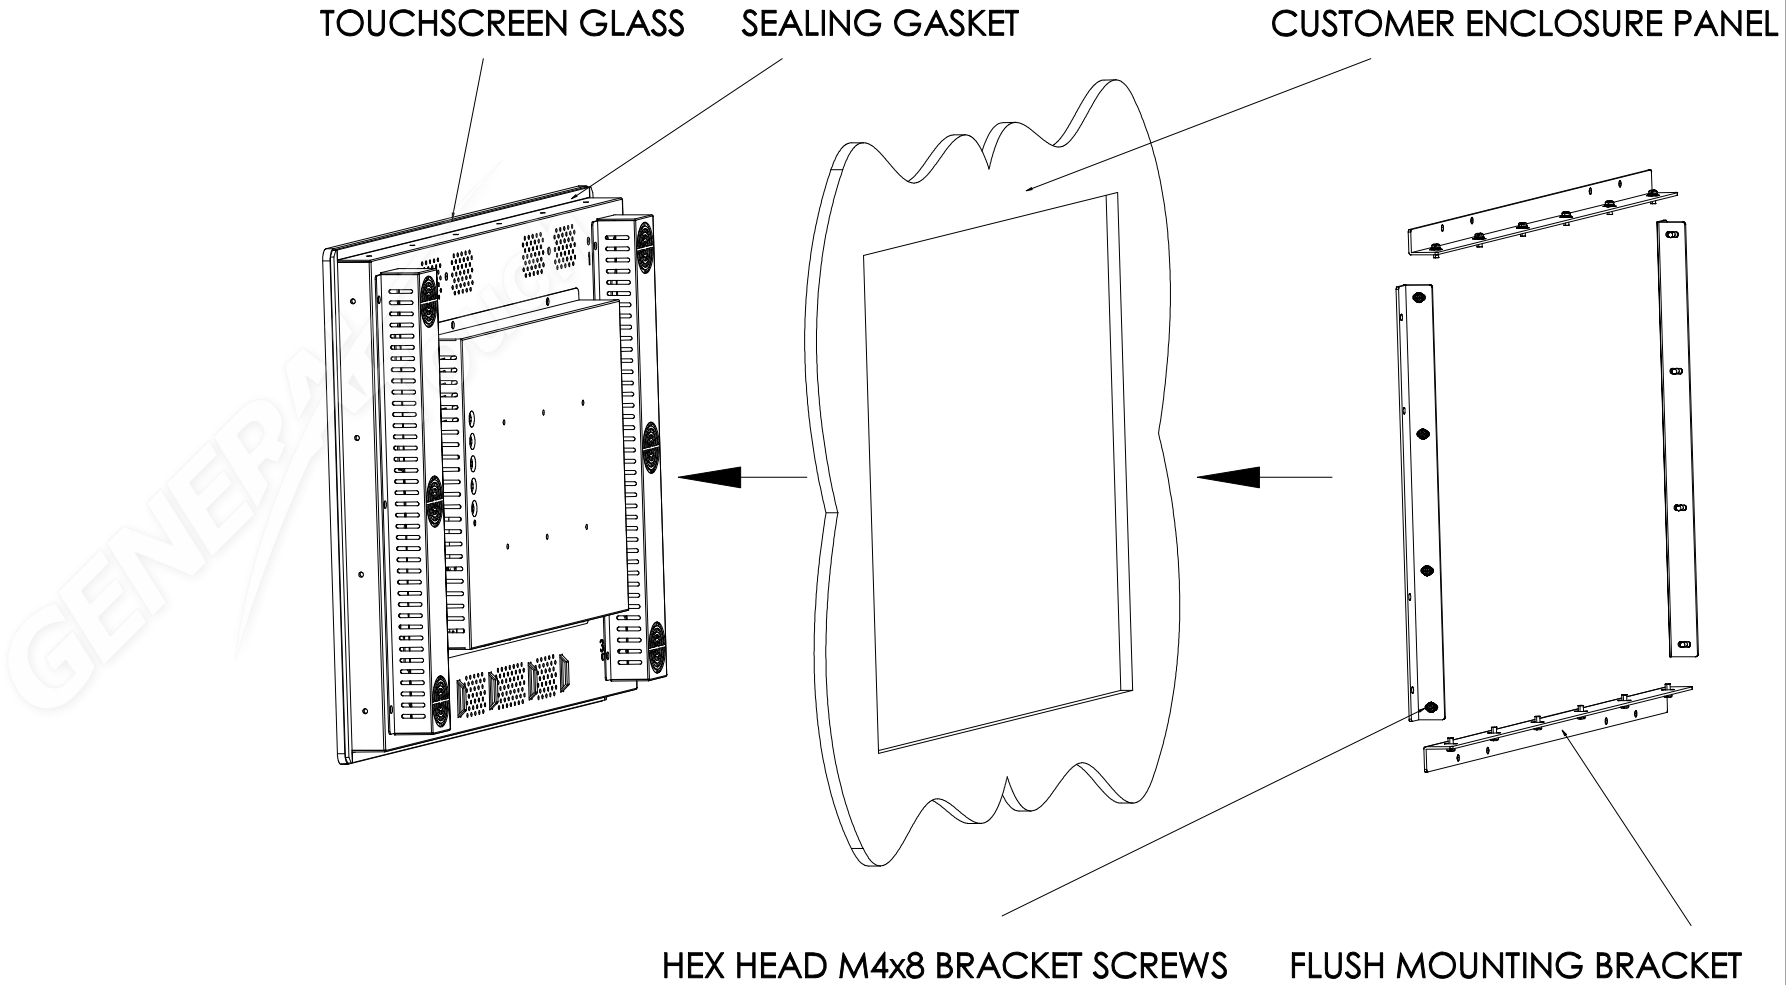

DO NOT SCALE DRAWING


GENERAL Touch		General Touch Co.,Ltd.							
SPECIFICATION		OVERALL DIMENSIONS		658.0x414.9x72.4		ANTI-GLARE Y ☒ N ☐			
UNIT	DATE	VIEW AREA		596.9x335.3				DESIGNER:	
MM	2025/12/19	GLASS THICKNESS		6.0 MM				Duan Wenbin	
PROJECTION:		SILK SCREEN COLOR		BLACK				CHECKED BY:	
		MOUNTING		VESA ☒ BRACKET ☒					
SHEET 4 of 6		NOTES						Zhang Kai	
VER: 1.3	SCALE: 1:1	TOUCH TECHNOLOGY		P-CAP		☒	SAW		APPROVED BY:
TOLERANCE: ±2.0MM				NON-TOUCH			RESISTIVE		
									Zhou Bolin

CUSTOMER RECOMMENDED MOUNTING GEOMETRY-2


TITLE: RSL276-RC80A0-UDB2L0-1.0

MARK	AMEND	SIGNATURE
⚠		

FRONT VIEW

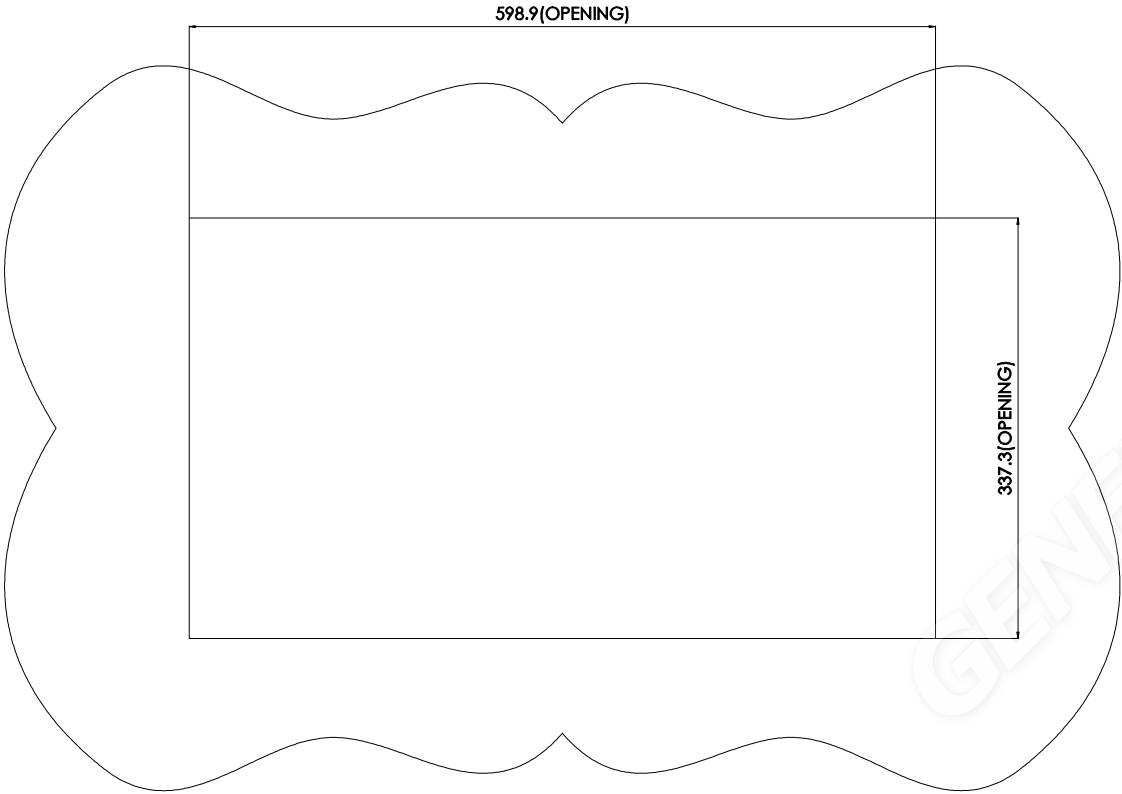

DO NOT SCALE DRAWING

GENERAL Touch		General Touch Co.,Ltd.							
SPECIFICATION		OVERALL DIMENSIONS		658.0x414.9x72.4		ANTI-GLARE Y ☒ N ☐			
UNIT	DATE	VIEW AREA		596.9x335.3				DESIGNER:	
MM	2025/12/19	GLASS THICKNESS		6.0 MM				Duan Wenbin	
PROJECTION:		SILK SCREEN COLOR		BLACK				CHECKED BY:	
		MOUNTING		VESA ☒		BRACKET ☒		Zhang Kai	
SHEET 5 of 6		NOTES							
VER: 1.3	SCALE: 1:1	TOUCH TECHNOLOGY		P-CAP		☒	SAW		APPROVED BY:
TOLERANCE: ±2.0MM				NON-TOUCH			RESISTIVE		
									Zhou Bolin


CUSTOMER RECOMMENDED MOUNTING GEOMETRY-2

TITLE: RSL276-RC80A0-UDB2L0-1.0


MARK	AMEND	SIGNATURE
⚠		

INSTALLATION NOTES:

- 1.THE OPENING SIZE OF THE CLIENT CABINET DOOR PANEL IS RECOMMENDED TO BE LAGER THAN THE SUGGESTED SIZE (SEE SHEET 5 FOR THE SUGGESTED SIZE) .
2. ATTACH FLUSH MOUNTING BRACKETS ON ALL FOUR SIDES OF DISPLAY WITH HEX HEAD M4x8(MAX) BRACKET SCREWS TO SECURE THE DISPLAY TO THE ENCLOSURE PANEL.ADJUST THE DISPLAY AS CLOSE AS POSSIBLE TO FLUSH WITH THE FRONT OF THE ENCLSOURE PANEL BEFORE TIGHTENING M4 BRACKET SCREWS. A SOCKET WRENCH IS RECOMMENDED IF CLEARANCE IS LIMITED.
- 3.APPLY A FULL CIRCLE OF LIQUIDE SILICONE ALONG THE EDGE WHERE THE DISPLAY CONTACTS THE DOOR PANEL.

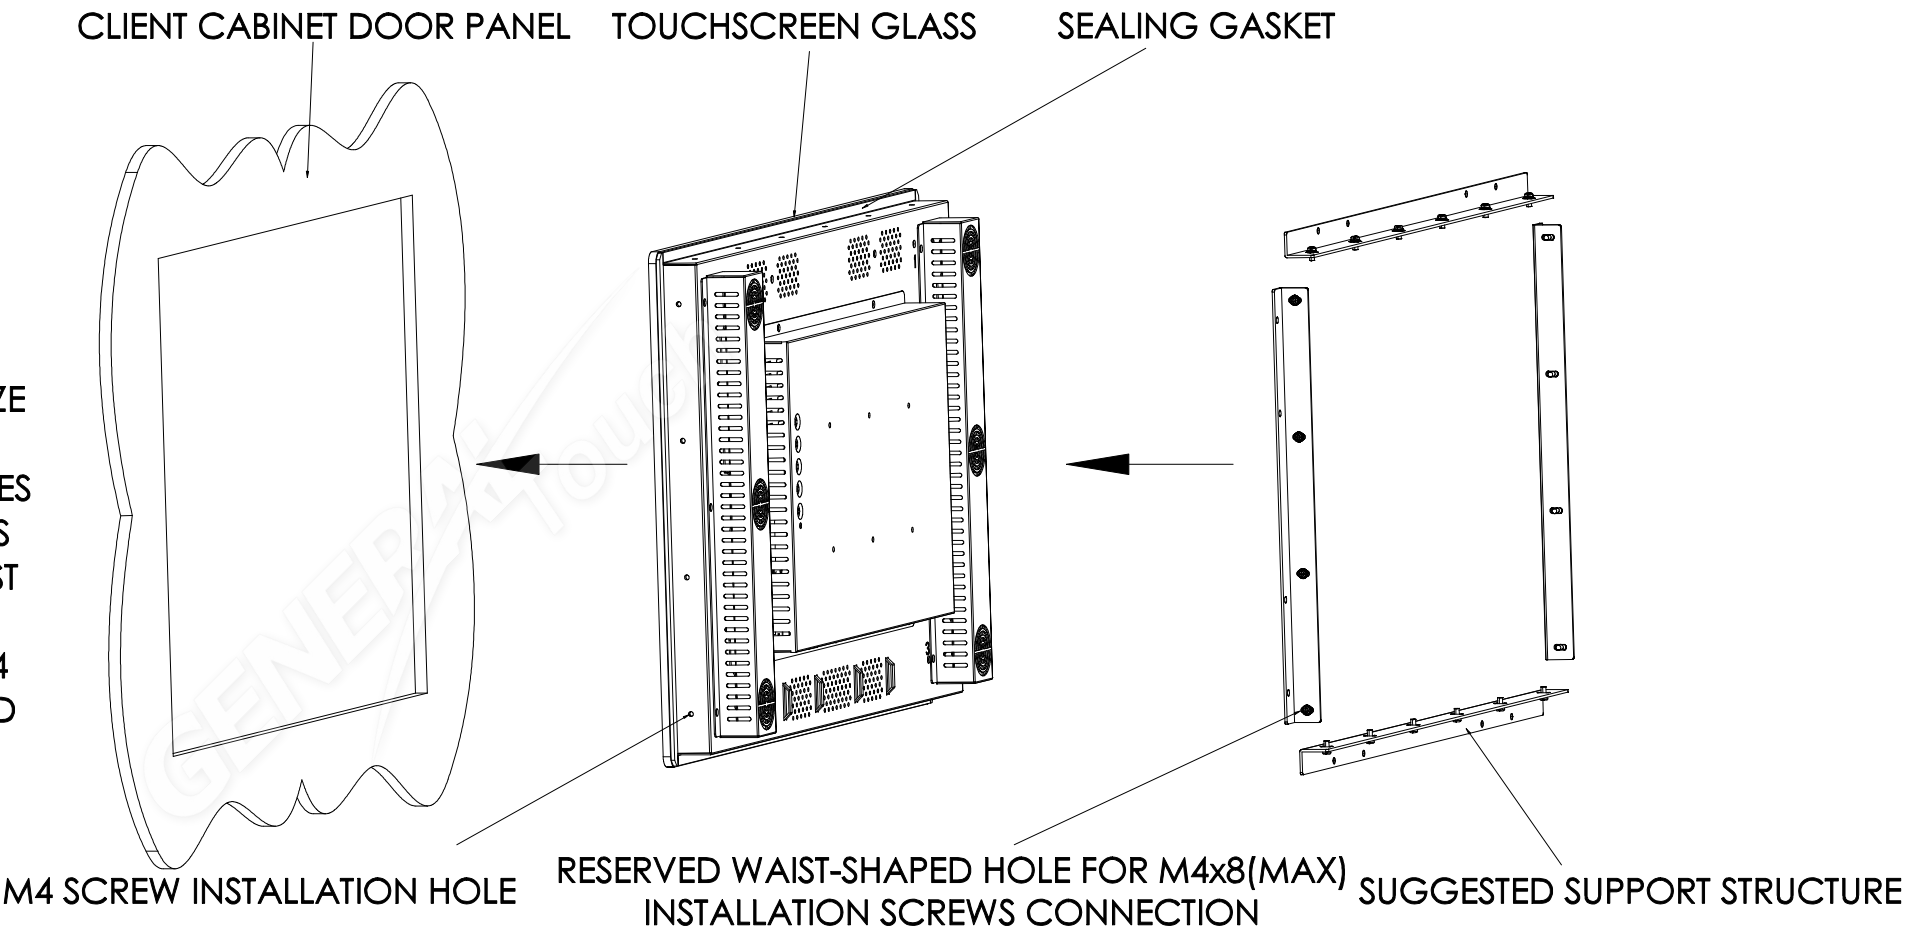

DO NOT SCALE DRAWING

GENERAL Touch		General Touch Co.,Ltd.					
SPECIFICATION		OVERALL DIMENSIONS	658.0x414.9x72.4		ANTI-GLARE Y ☒ N ☐		DESIGNER: Duan Wenbin
UNIT	DATE	VIEW AREA	596.9x335.3				
MM	2025/12/19	GLASS THICKNESS	6.0 MM				
PROJECTION:		SILK SCREEN COLOR	BLACK				CHECKED BY: Zhang Kai
		MOUNTING	VESA ☒ BRACKET ☒				
SHEET 6 of 6		NOTES					APPROVED BY: Zhou Bolin
VER: 1.3	SCALE: 1:1	TOUCH TECHNOLOGY	P-CAP	☒	SAW		
TOLERANCE: ±2.0MM			NON-TOUCH		RESISTIVE		