
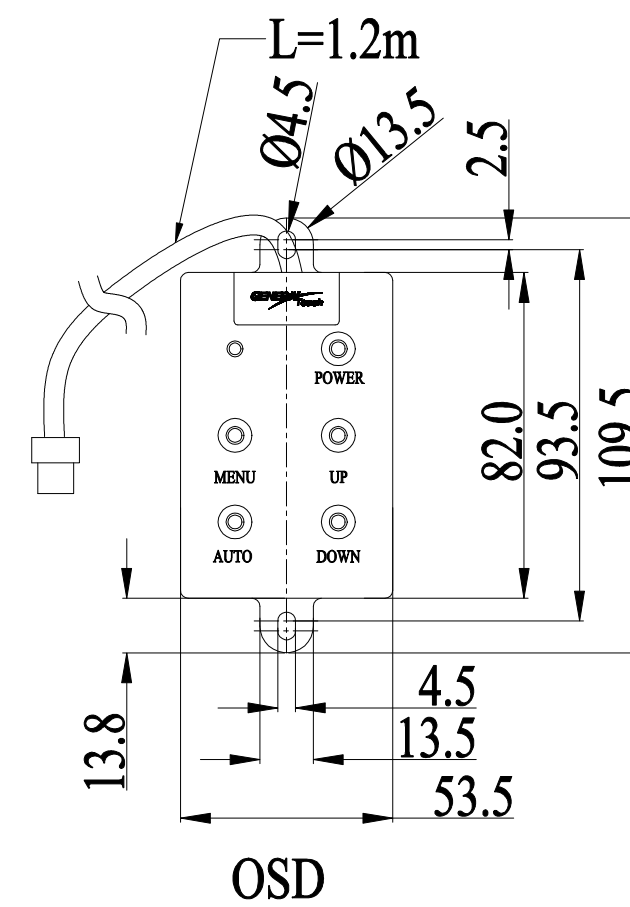
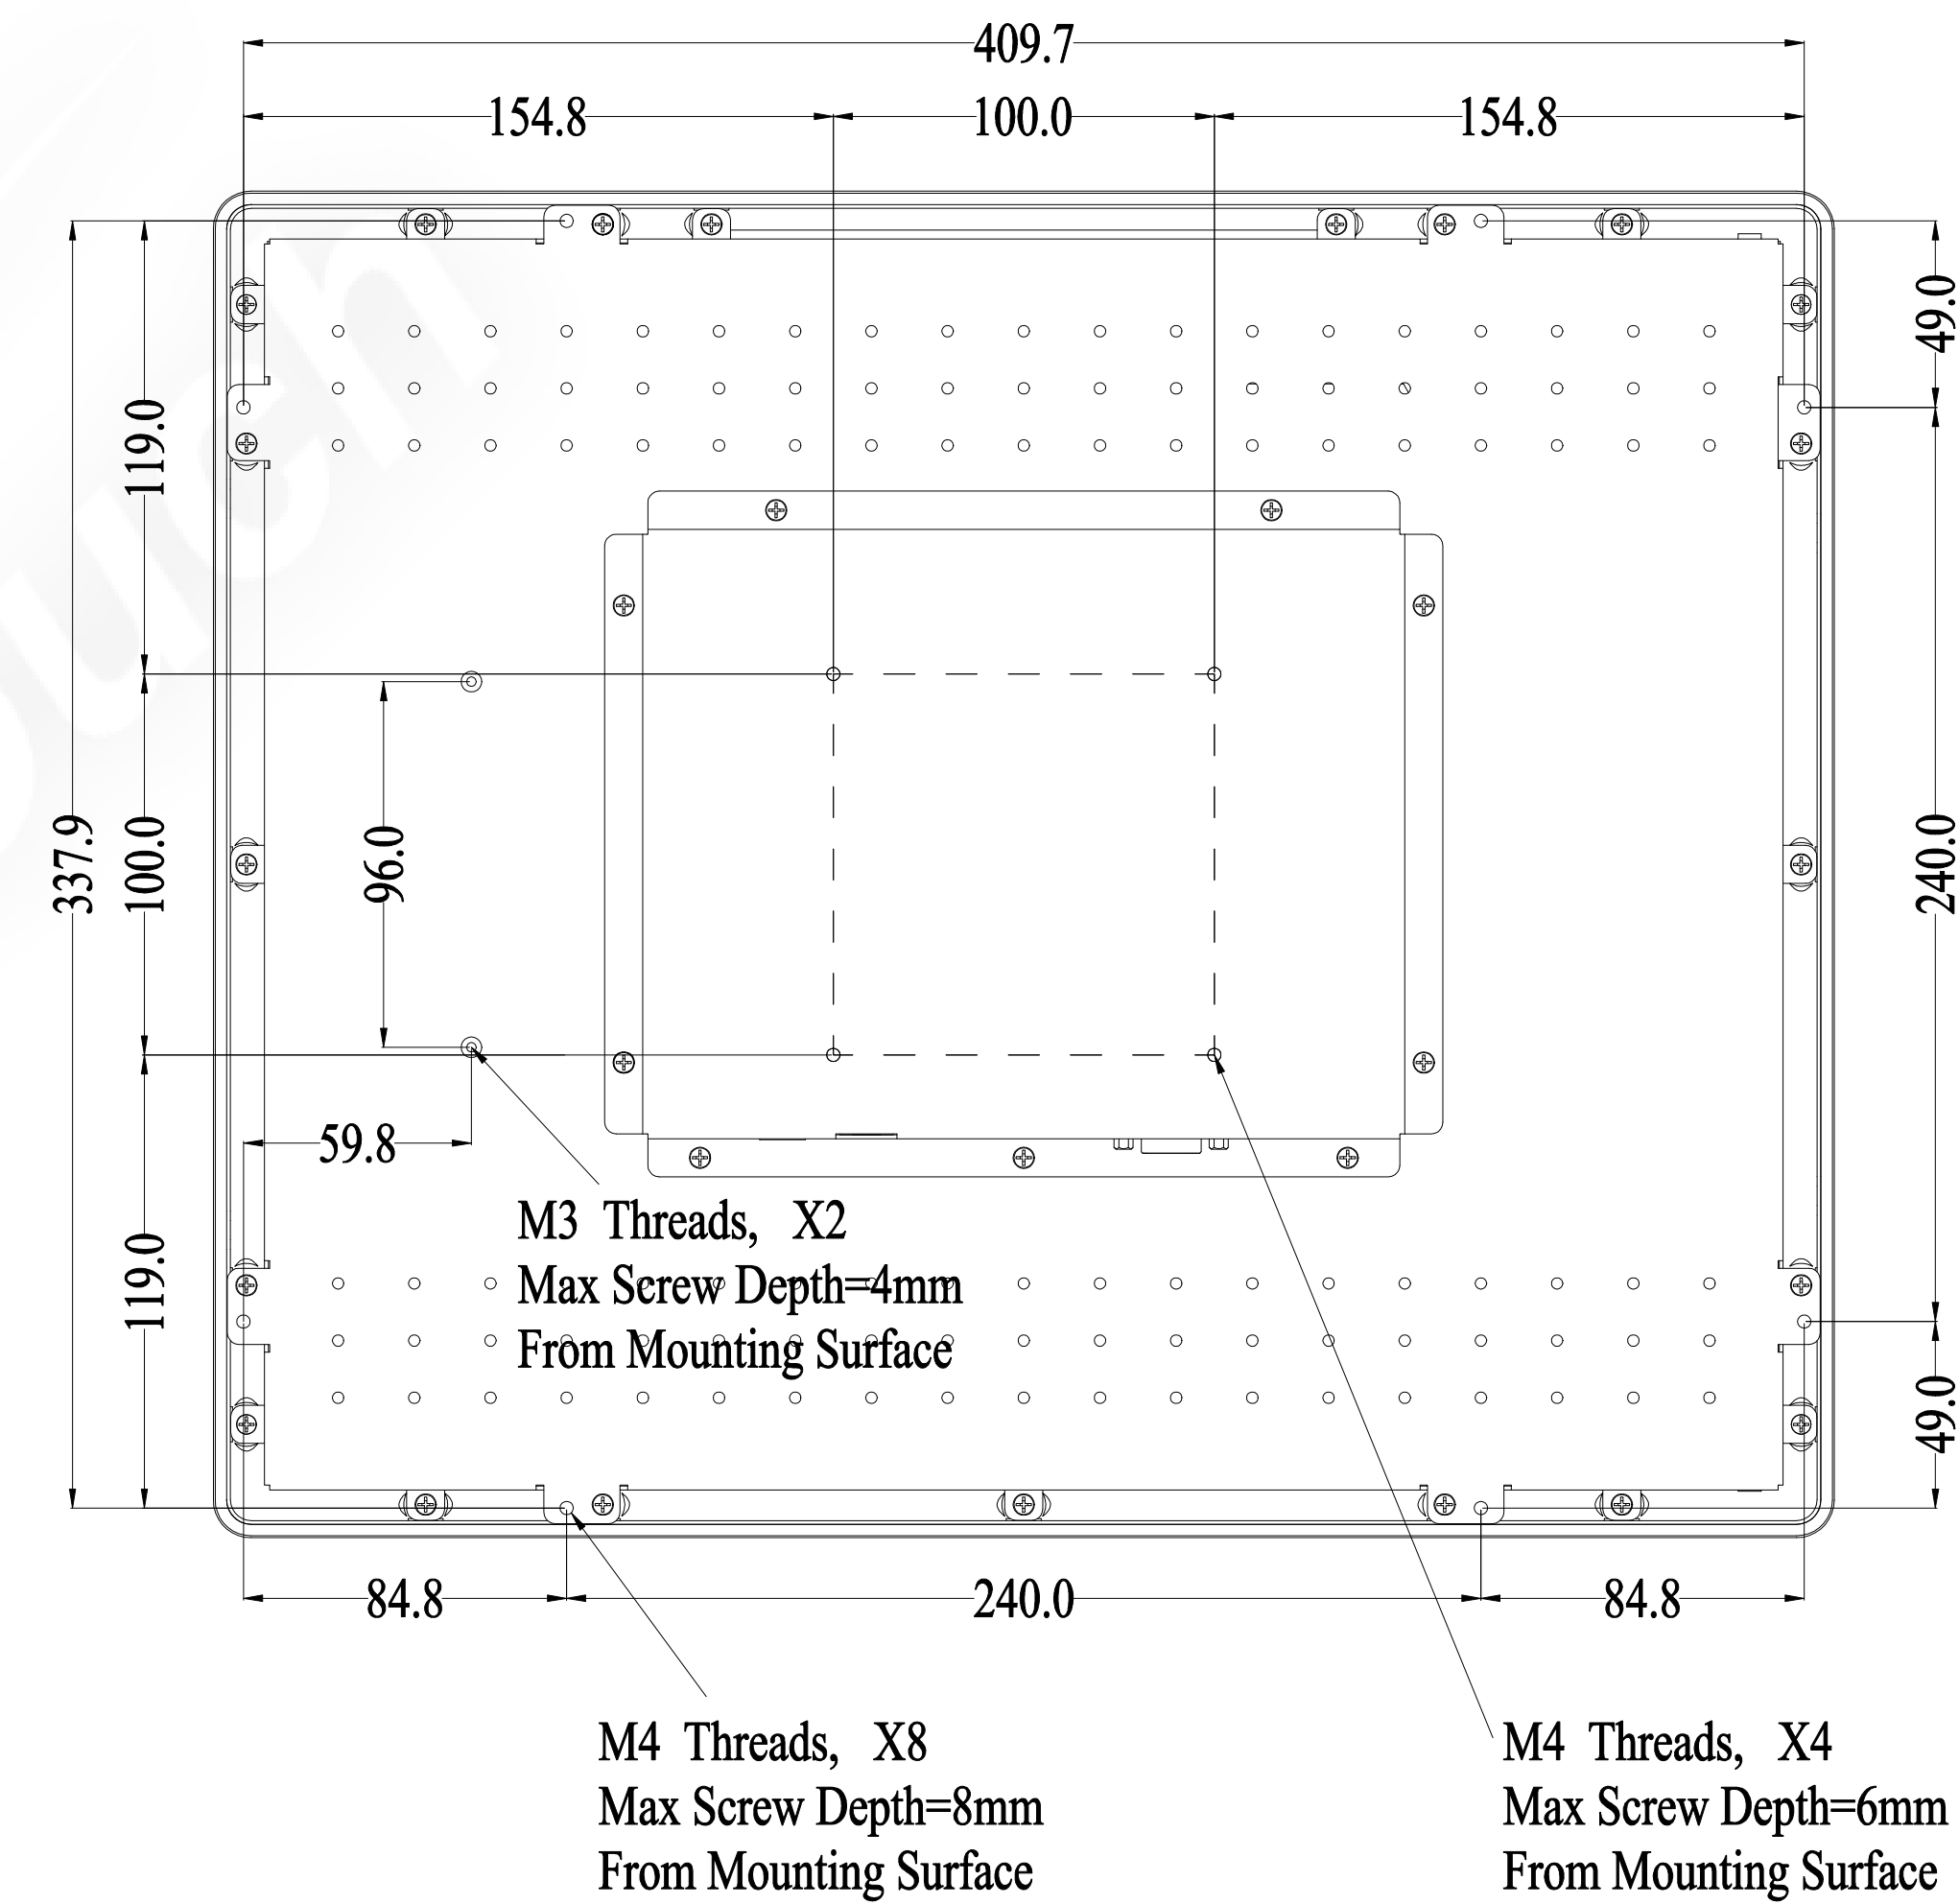
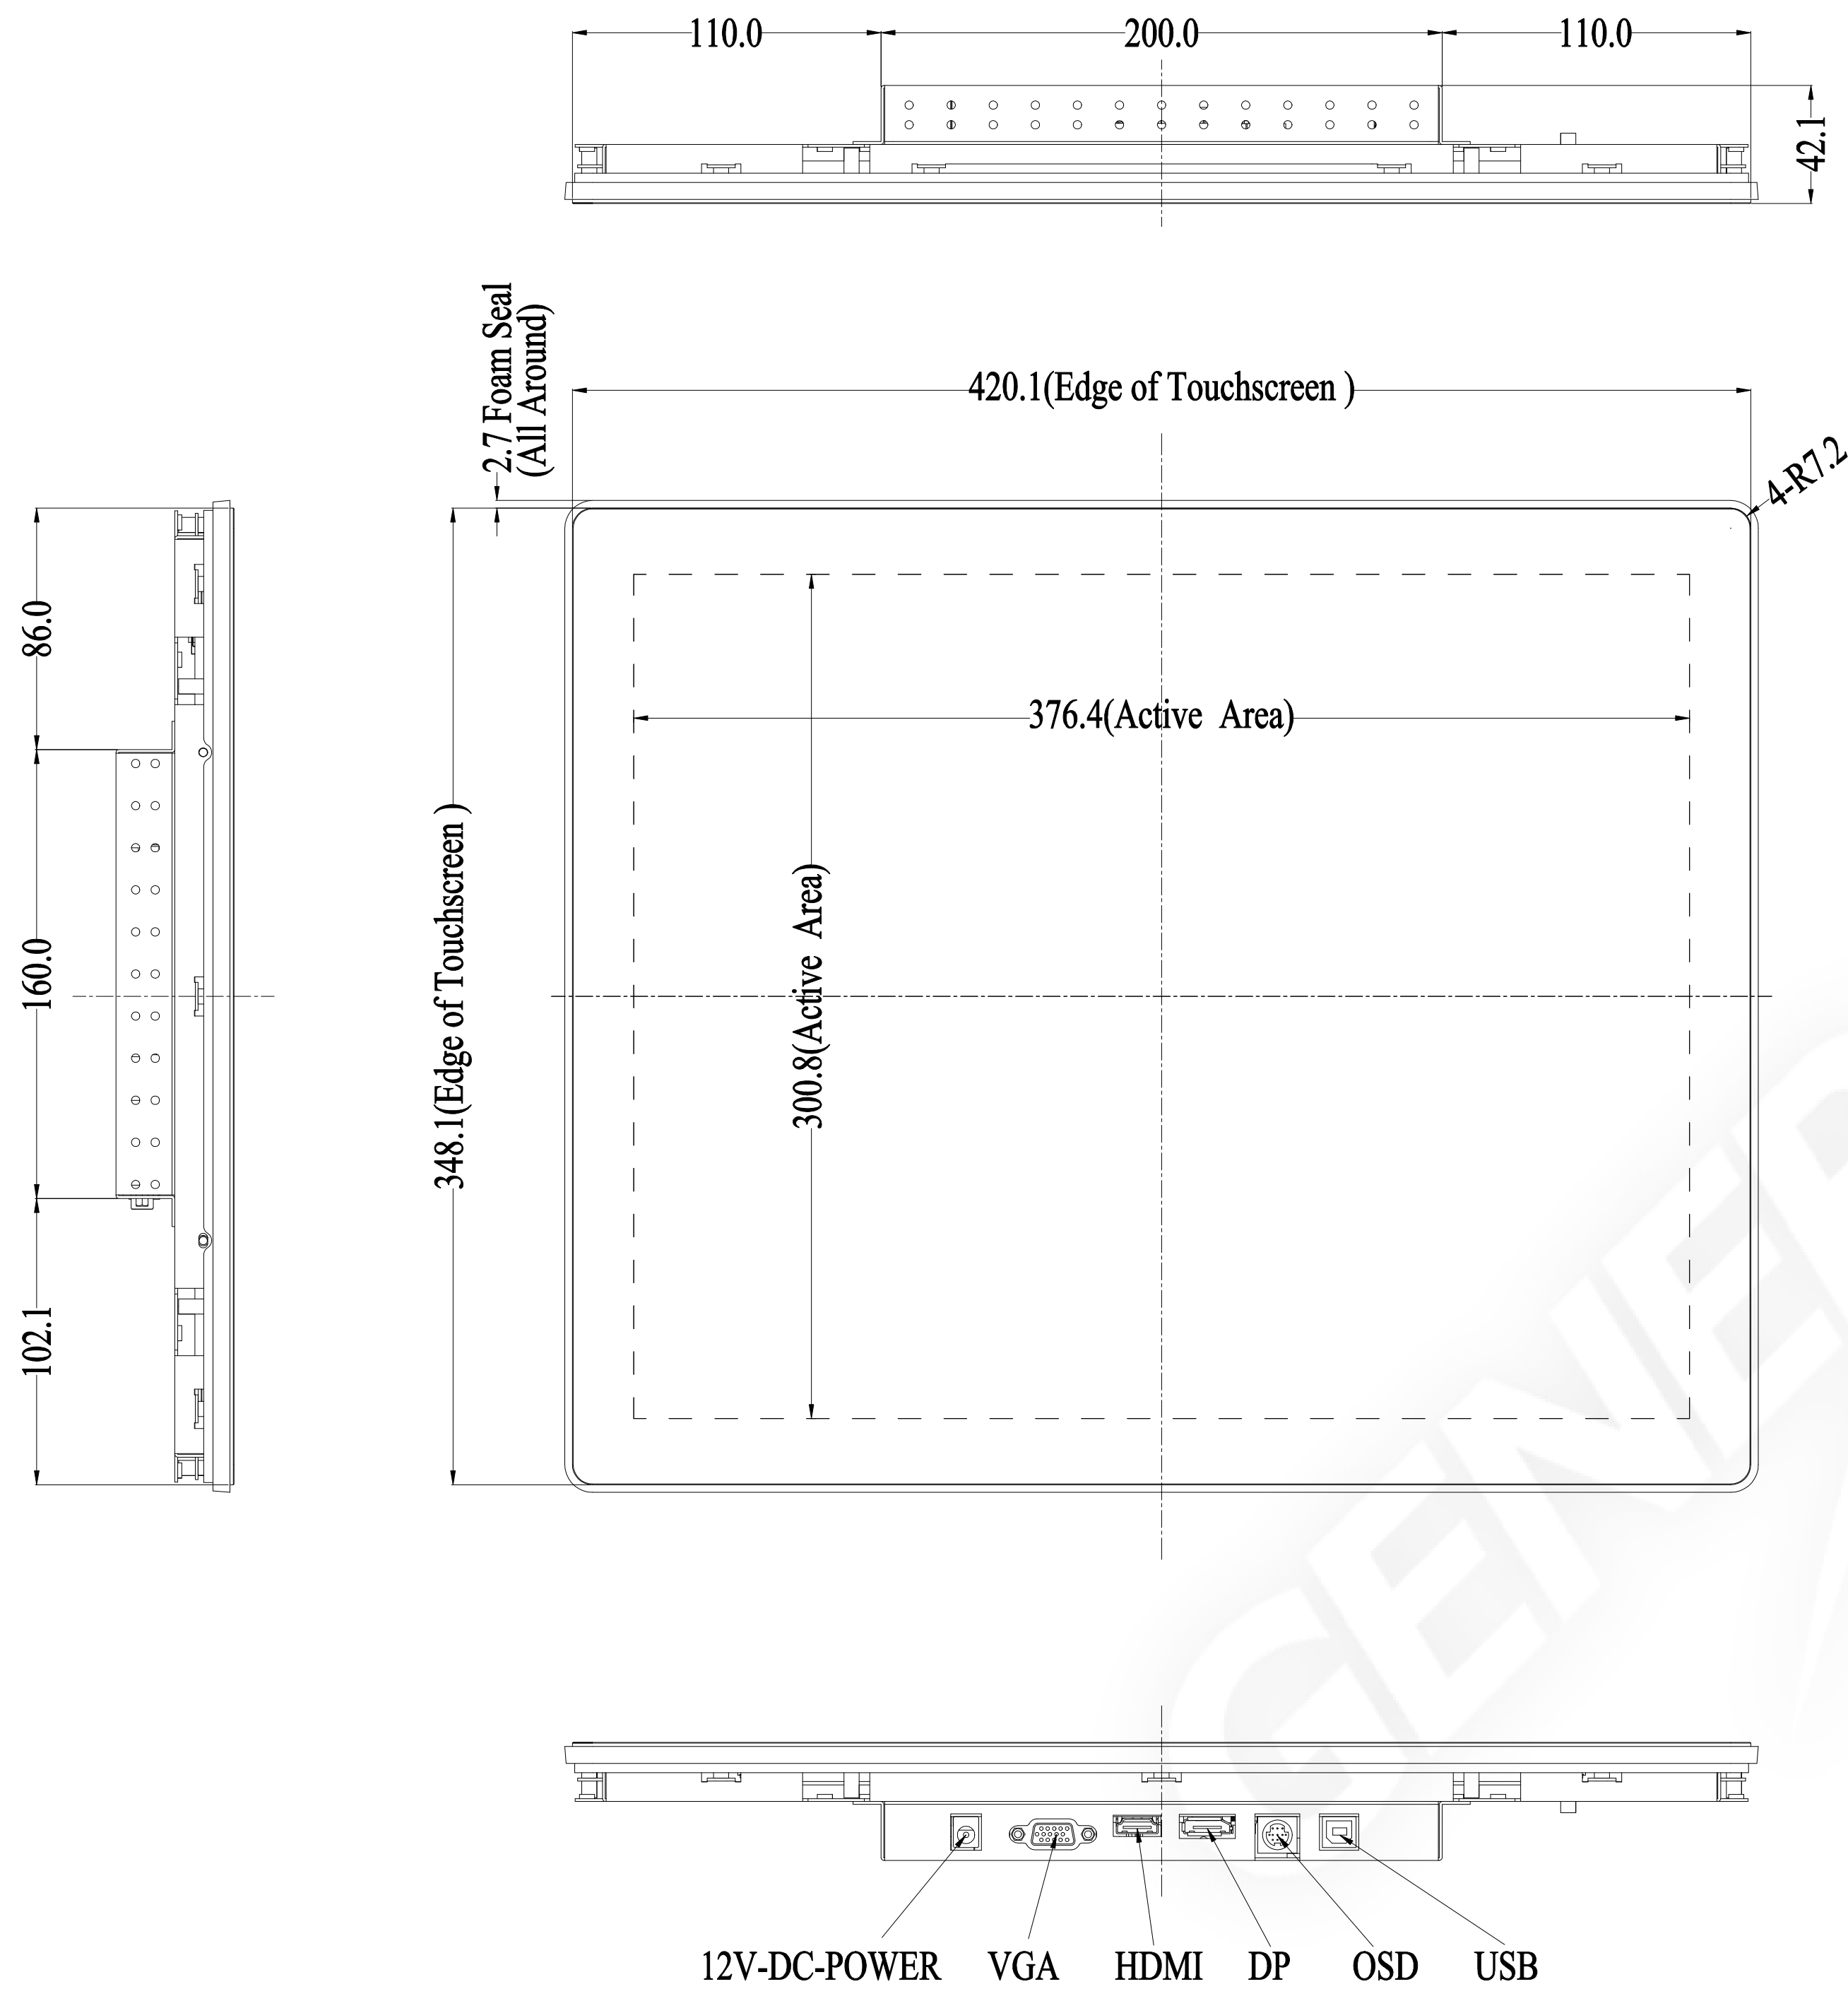


Title: RTL19L-LC5000-UD2A00-1.0

Mark	Revised Contents	Signature
△		




ALL DIMENSIONS ARE IN MILLIMETERS




GENERAL Touch		GeneralTouch Co., Ltd.					
Specification		External Dimensions	420.1*348.1*42.1	Anti-Glare	Y ☐ N ☒		Designer:
Unit	Date	Active Area	376.4*300.8	DustProof	Y ☐ N ☒		
mm	2023/08/02	Glass Thickness	3 mm				Han Jin
Projection:		Silk Print Color					Checked By:
		Mounting	VESA ☒ Bracket ☒				
Sheet 1 of 2		Notes					Wang Zhenghua
VER: 0.1	Scale: 1:1	Touch Technology	P-CAP	☒	SAW		Approved By:
Tolerance: ±1.0mm			IR/PIT		Resistive		
			Non-Touch				
							Zhou Bolin

Title: RTL19L-LC5000-UD2A00-1.0

Mark	Revised Contents	Signature
①		

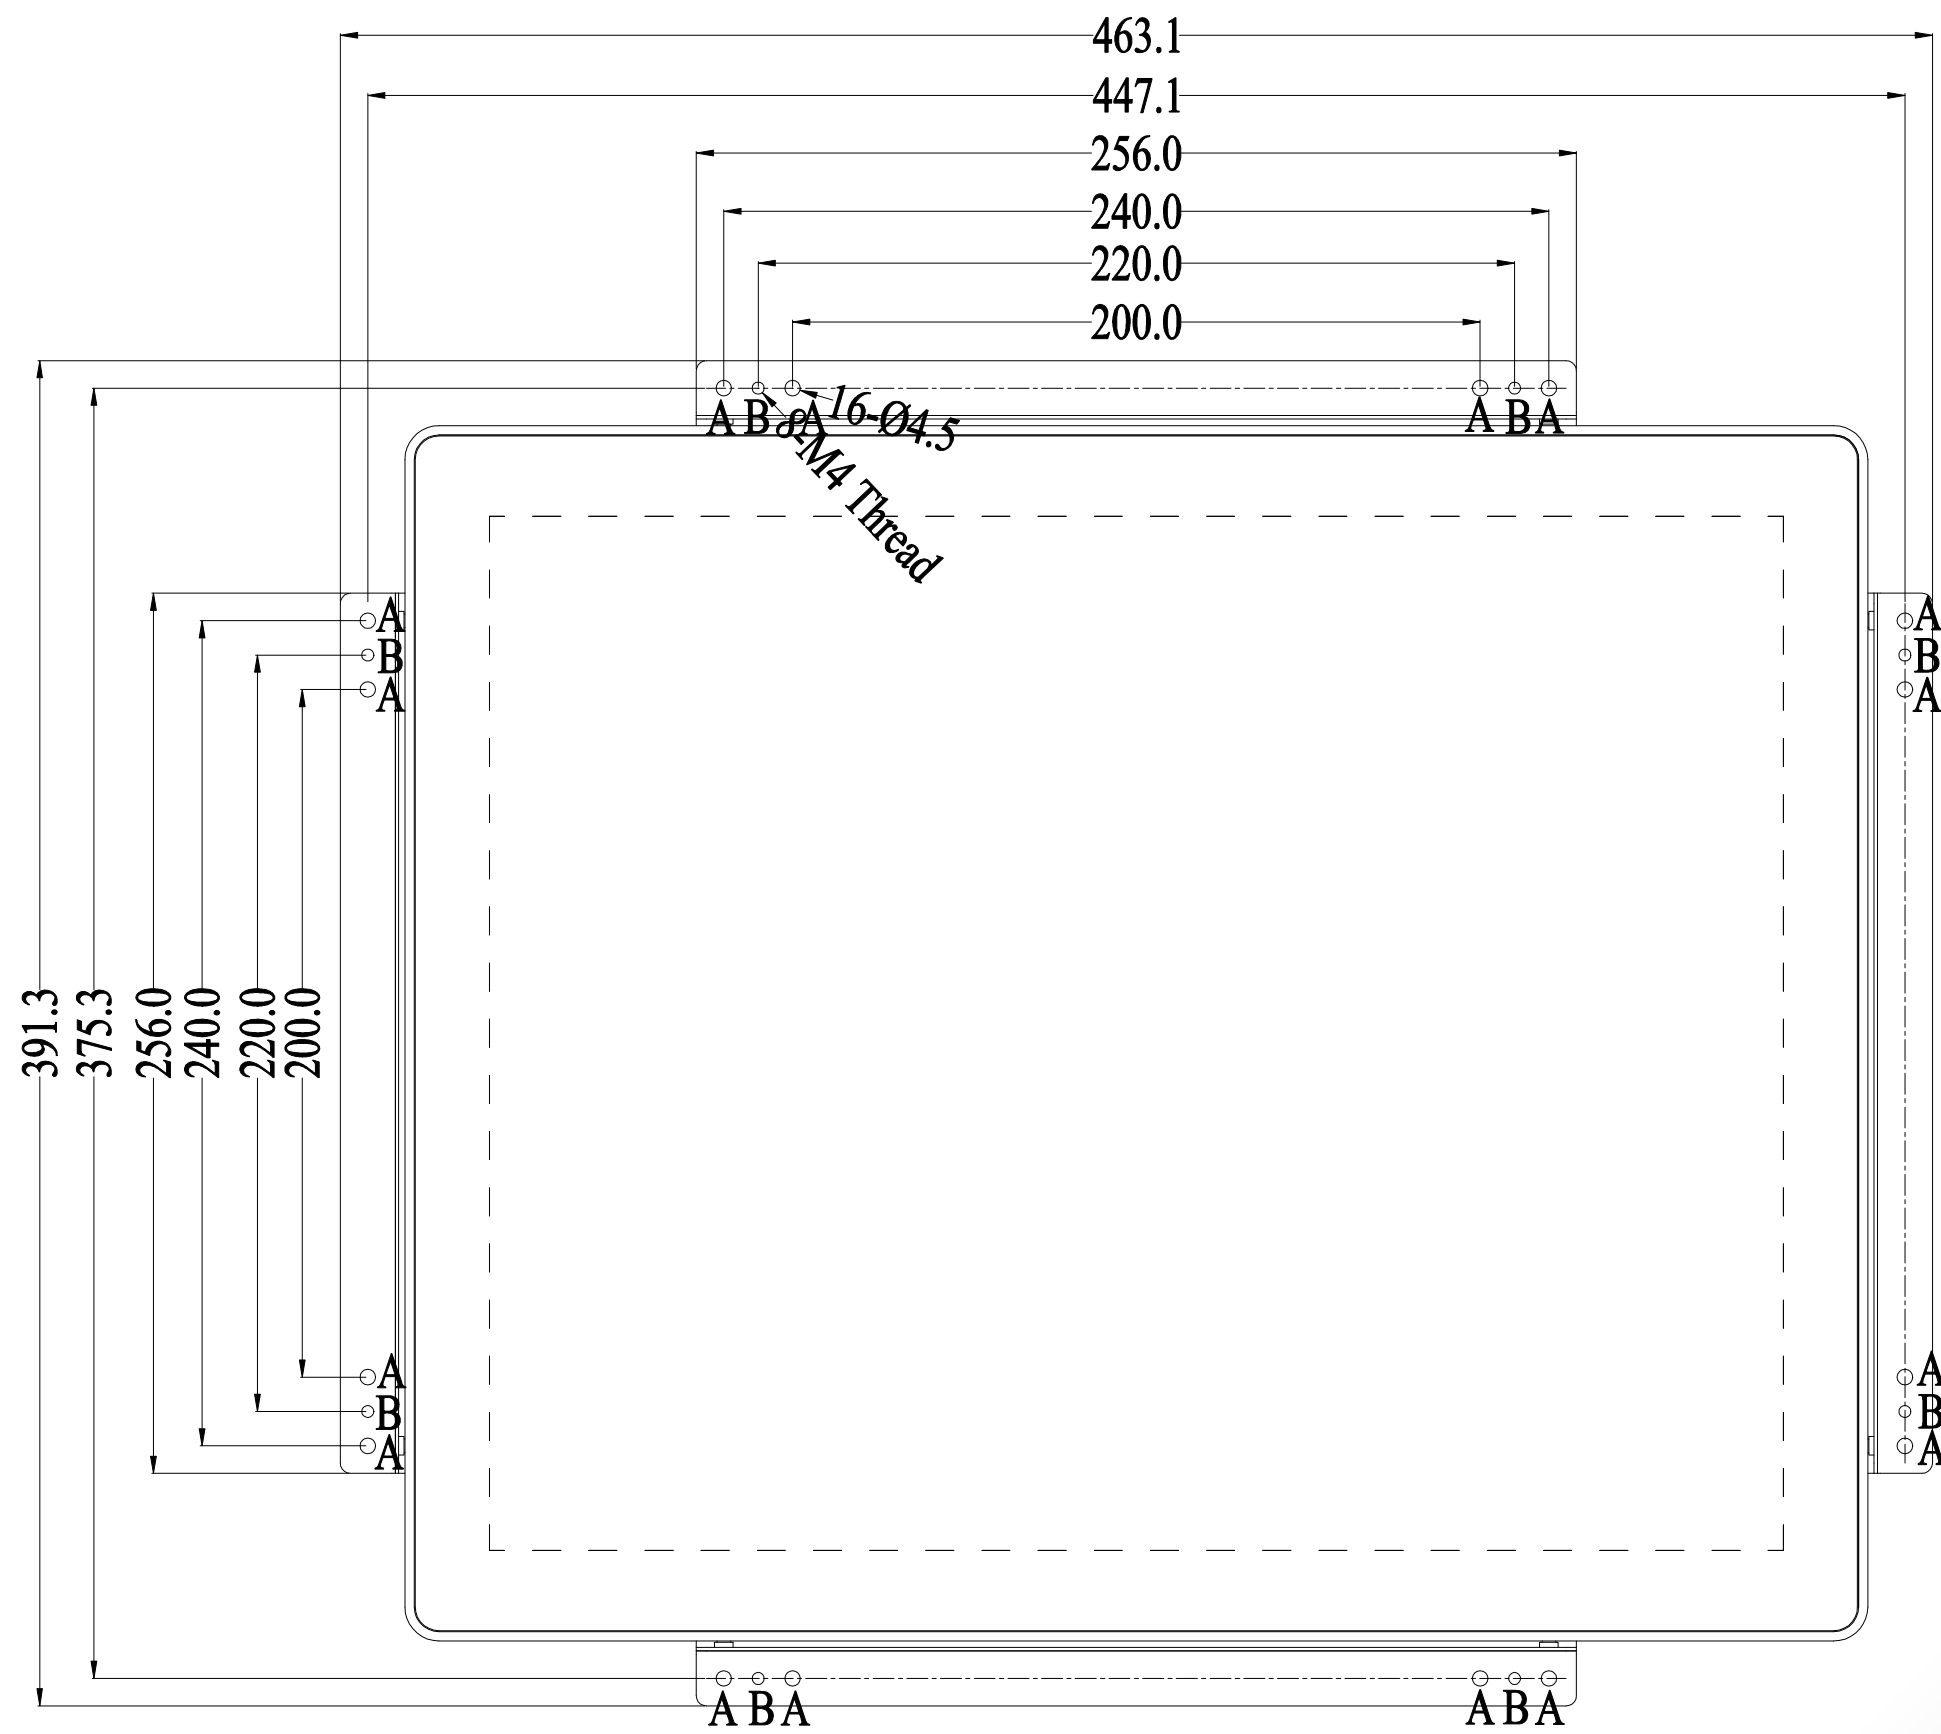


Ad Justment Range=3 To 10.6 MM

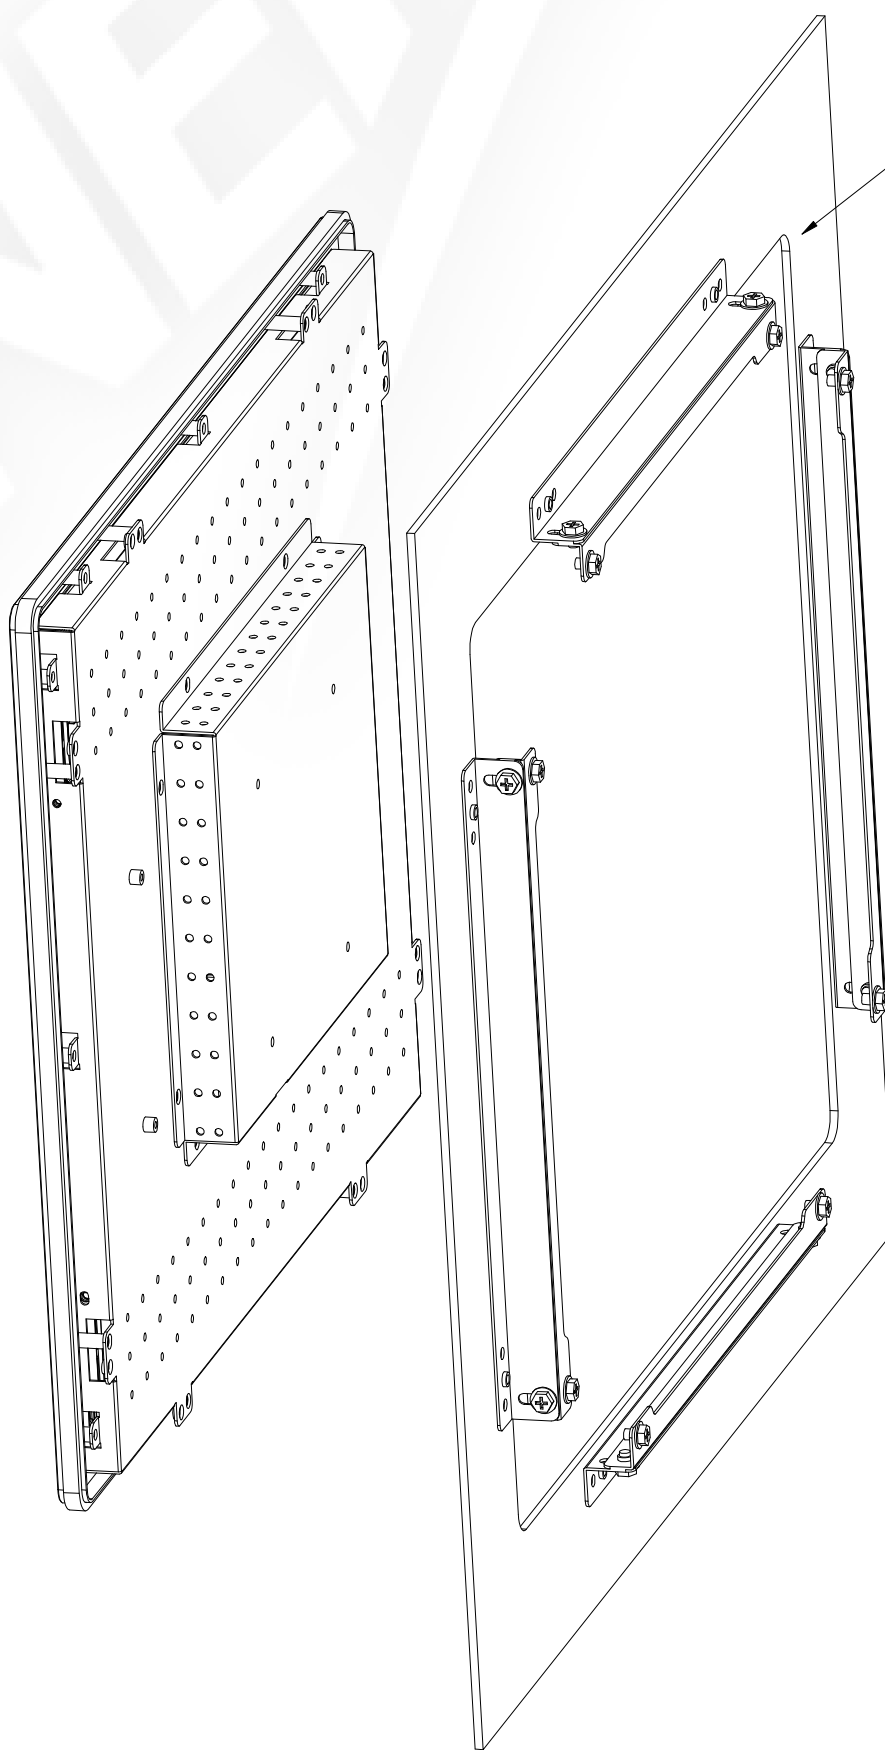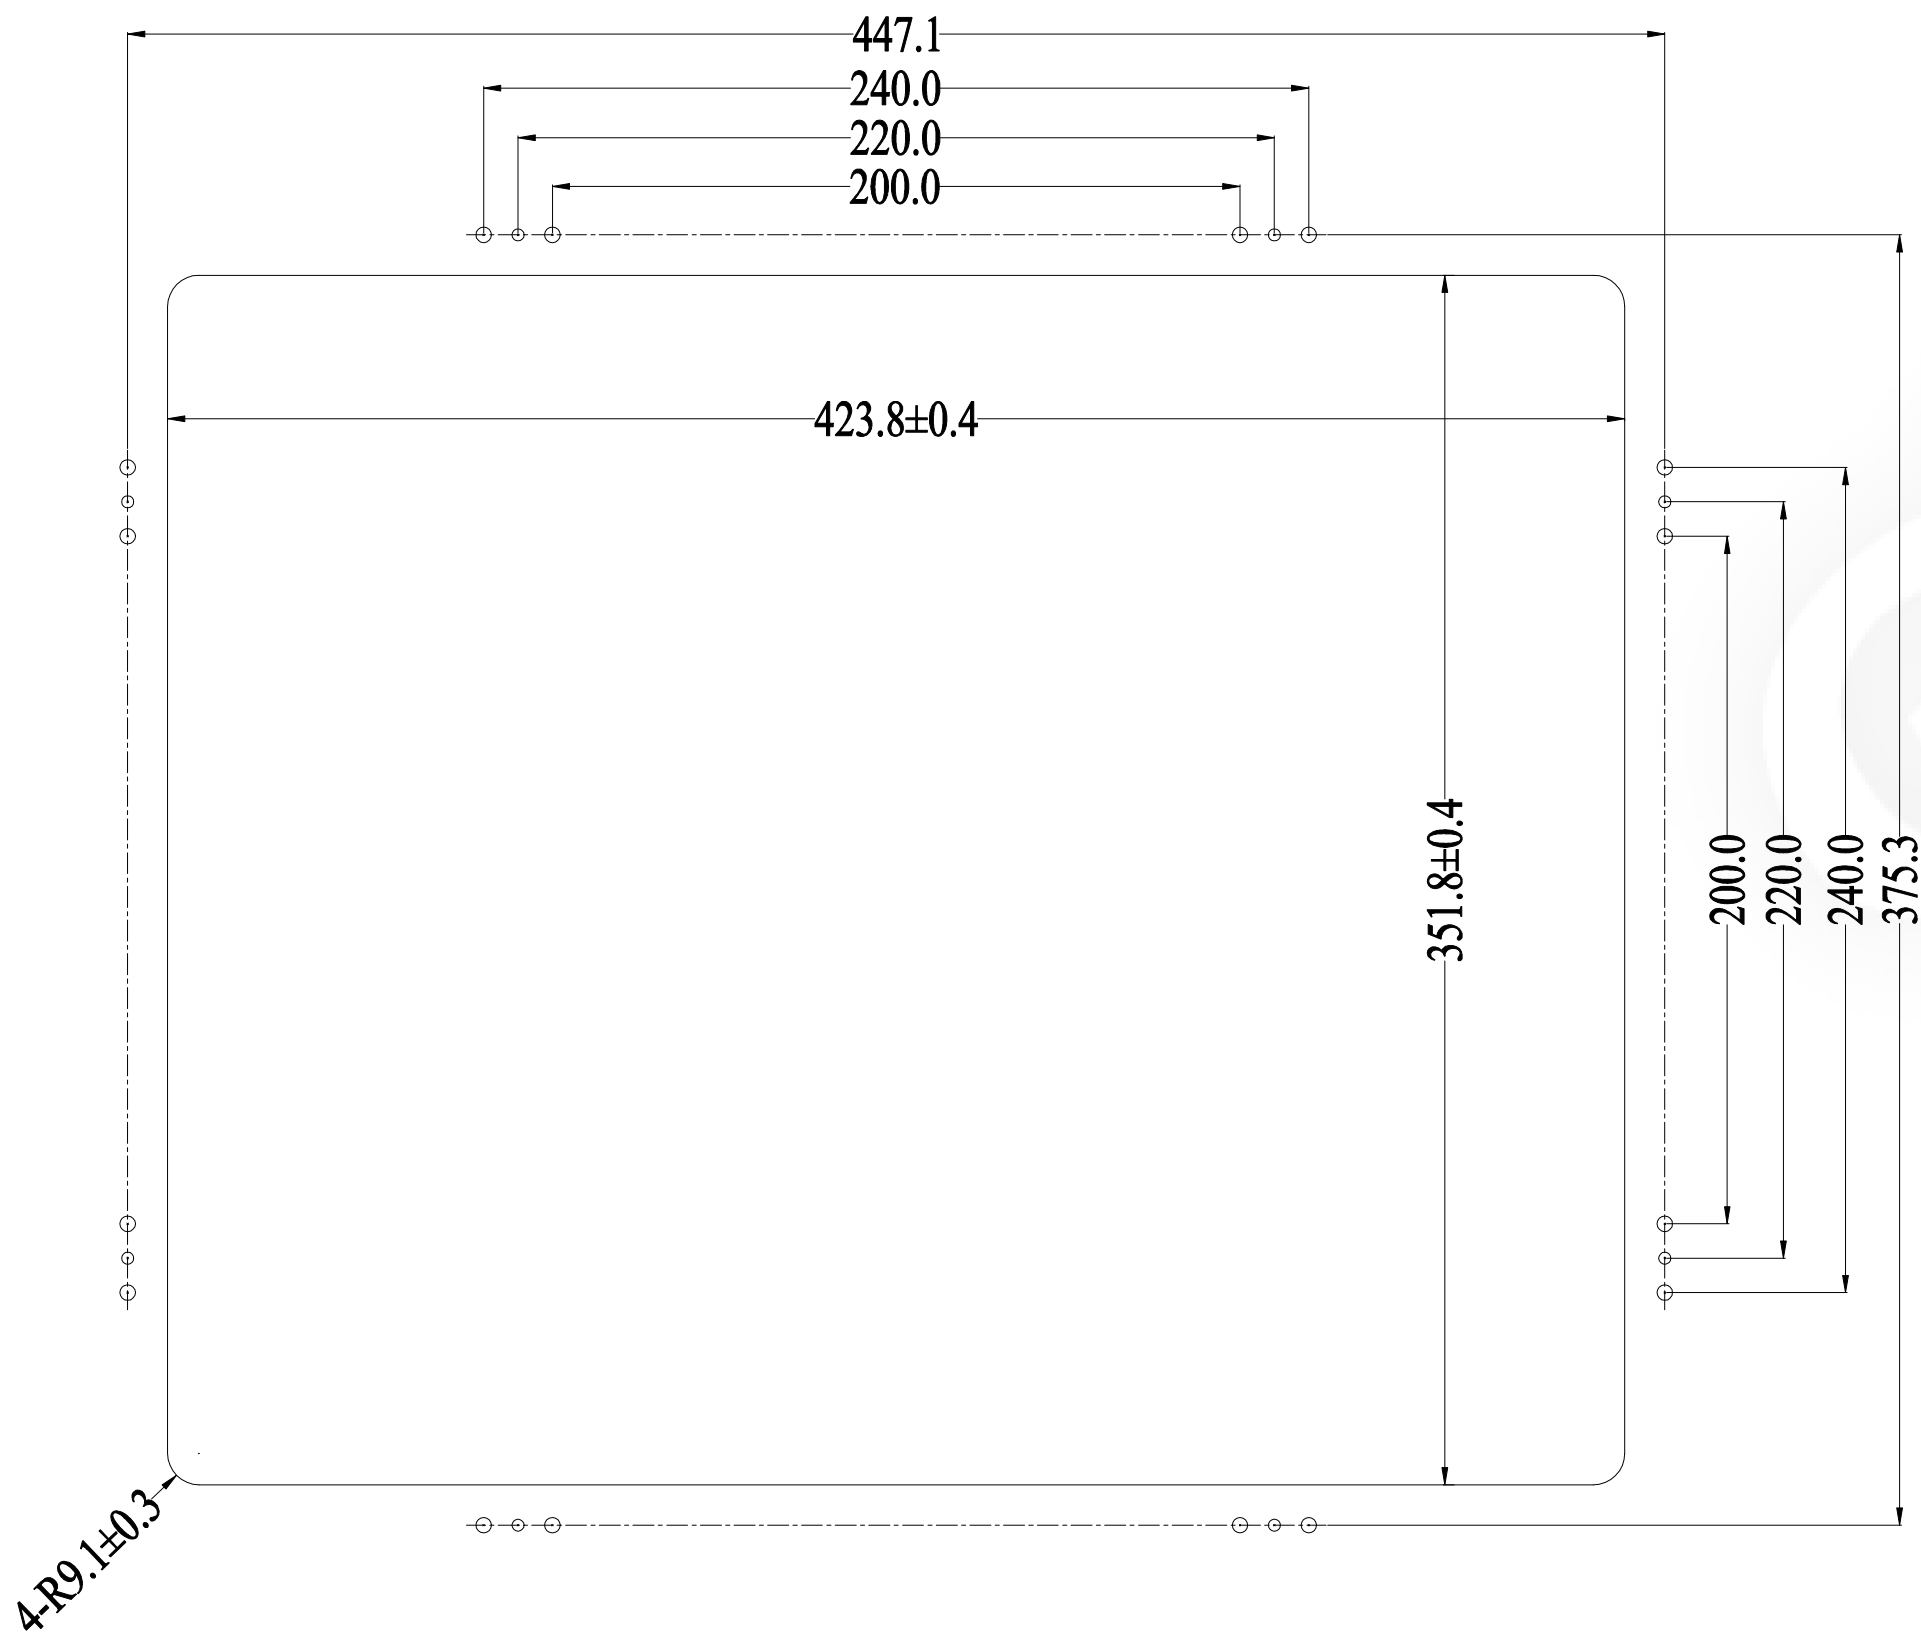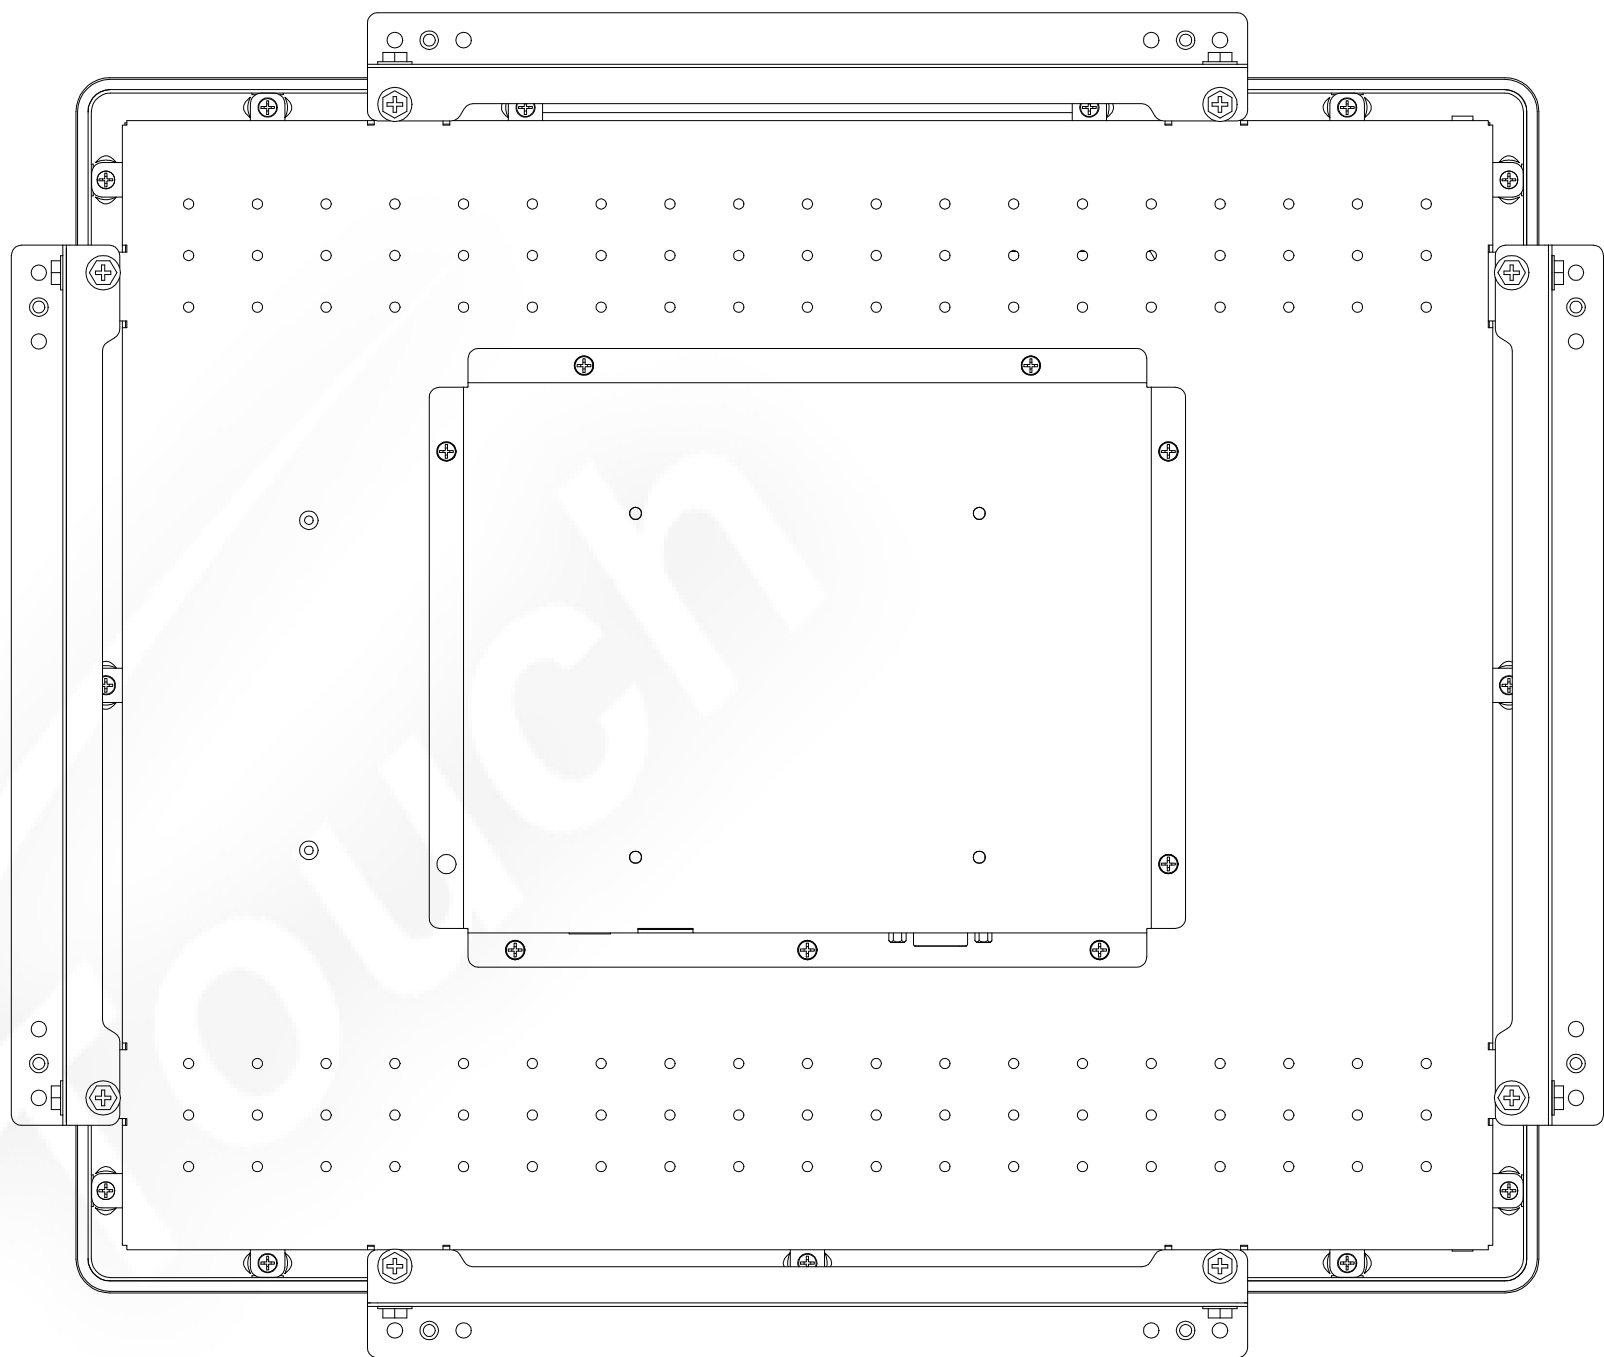

Customer Panel (Not Included)
Min Thickness =4 mm
Max Thickness =10 mm

120400537R Mounting bracket assembly is optional

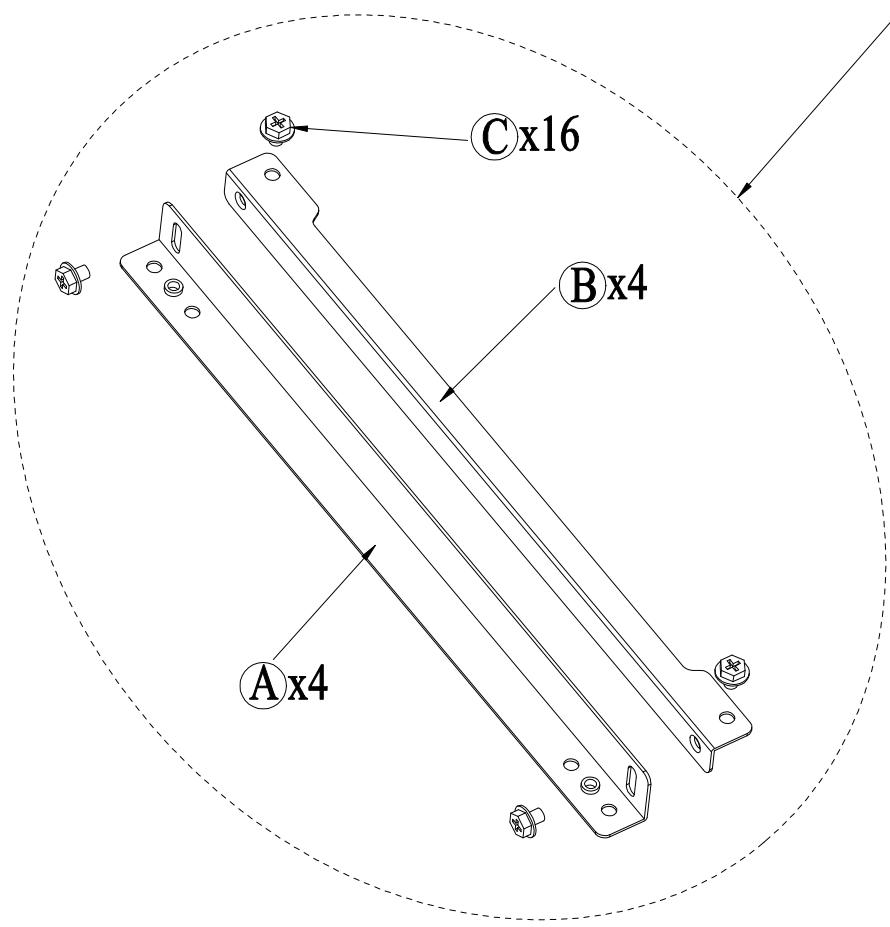

Optional Accessories		
Part Number	Description	Qty
120400537R	Mounting bracket assembly	1

ALL DIMENSIONS ARE IN MILLIMETERS

GENERAL Touch		GeneralTouch Co., Ltd.						
Specification	External Dimensions	463.1*391.3*42.1	Anti-Glare	Y ☐ N ☒	Designer:			
Unit	Date	Active Area	376.4*300.8	DustProof	Y ☐ N ☒	Han Jin		
mm	2023/08/02	Glass Thickness	3 mm			Checked By:		
Projection:		Silk Print Color				Wang Zhenghua		
		Mounting	VESA ☒	Bracket	☒	Approved By:		
Sheet 2 of 2		Notes				Zhou Bolin		
VER: 0.1	Scale: 1:1	Touch Technology	P-CAP	☒	SAW			
Tolerance: ±1.0mm			IR/PIT		Resistive			
			Non-Touch					