
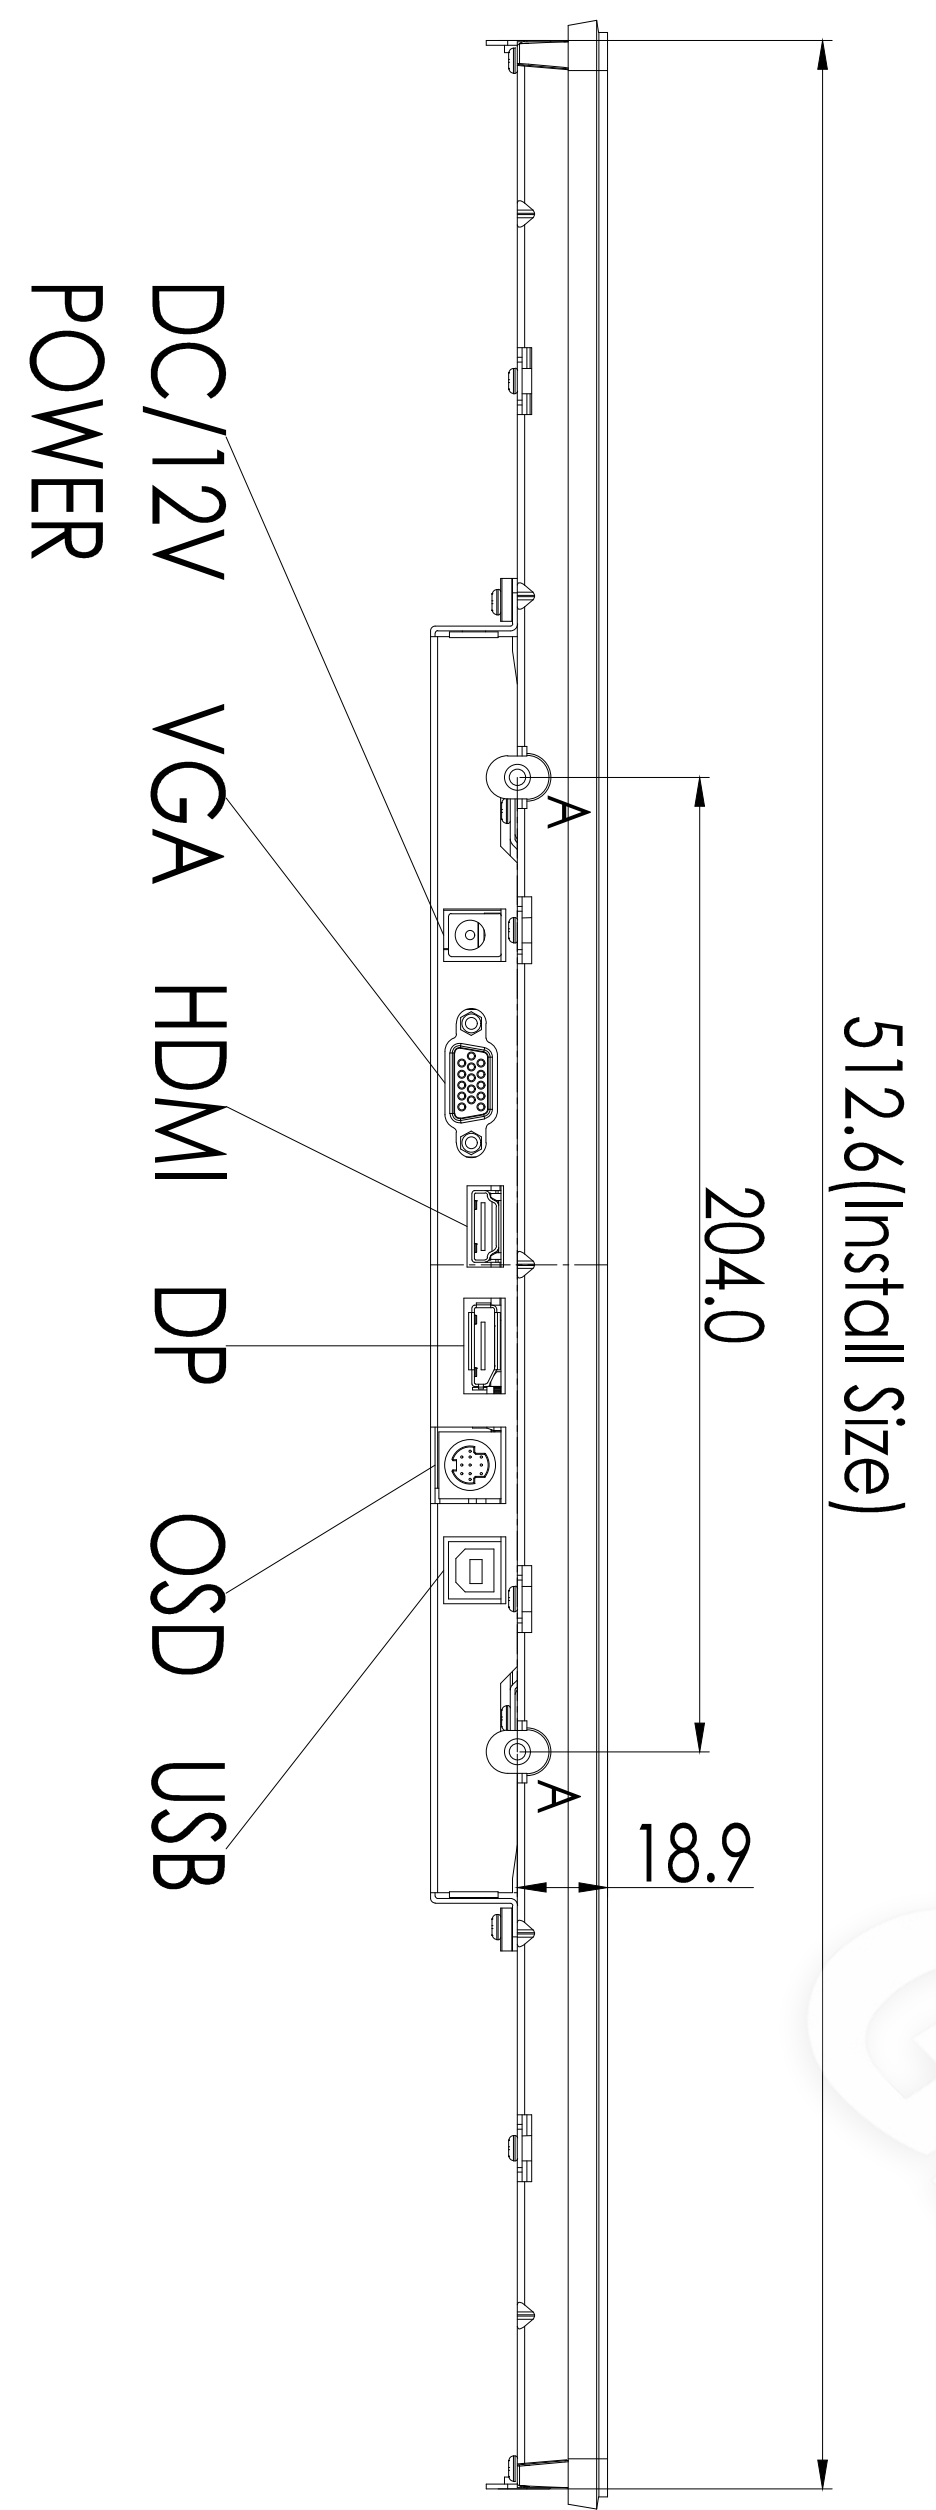
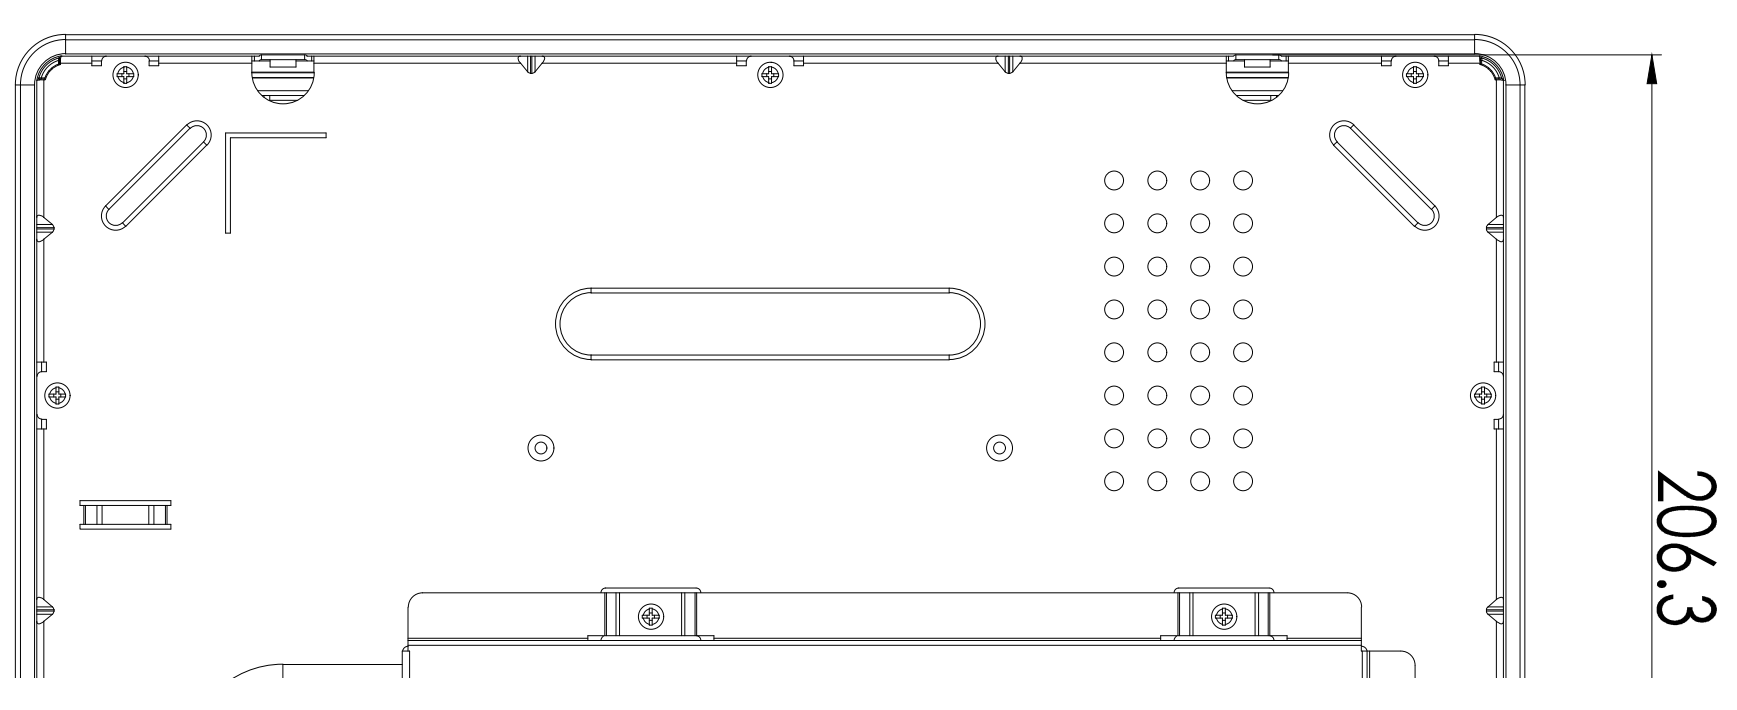
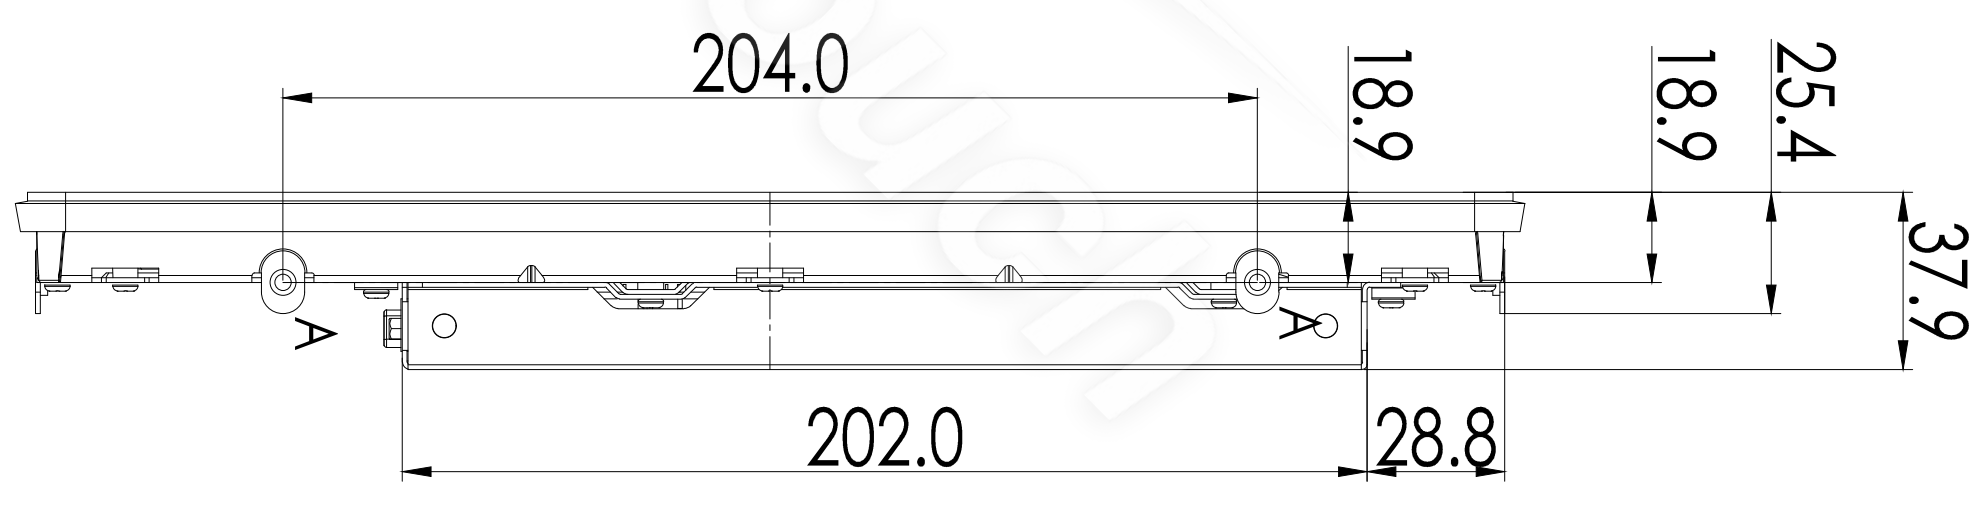
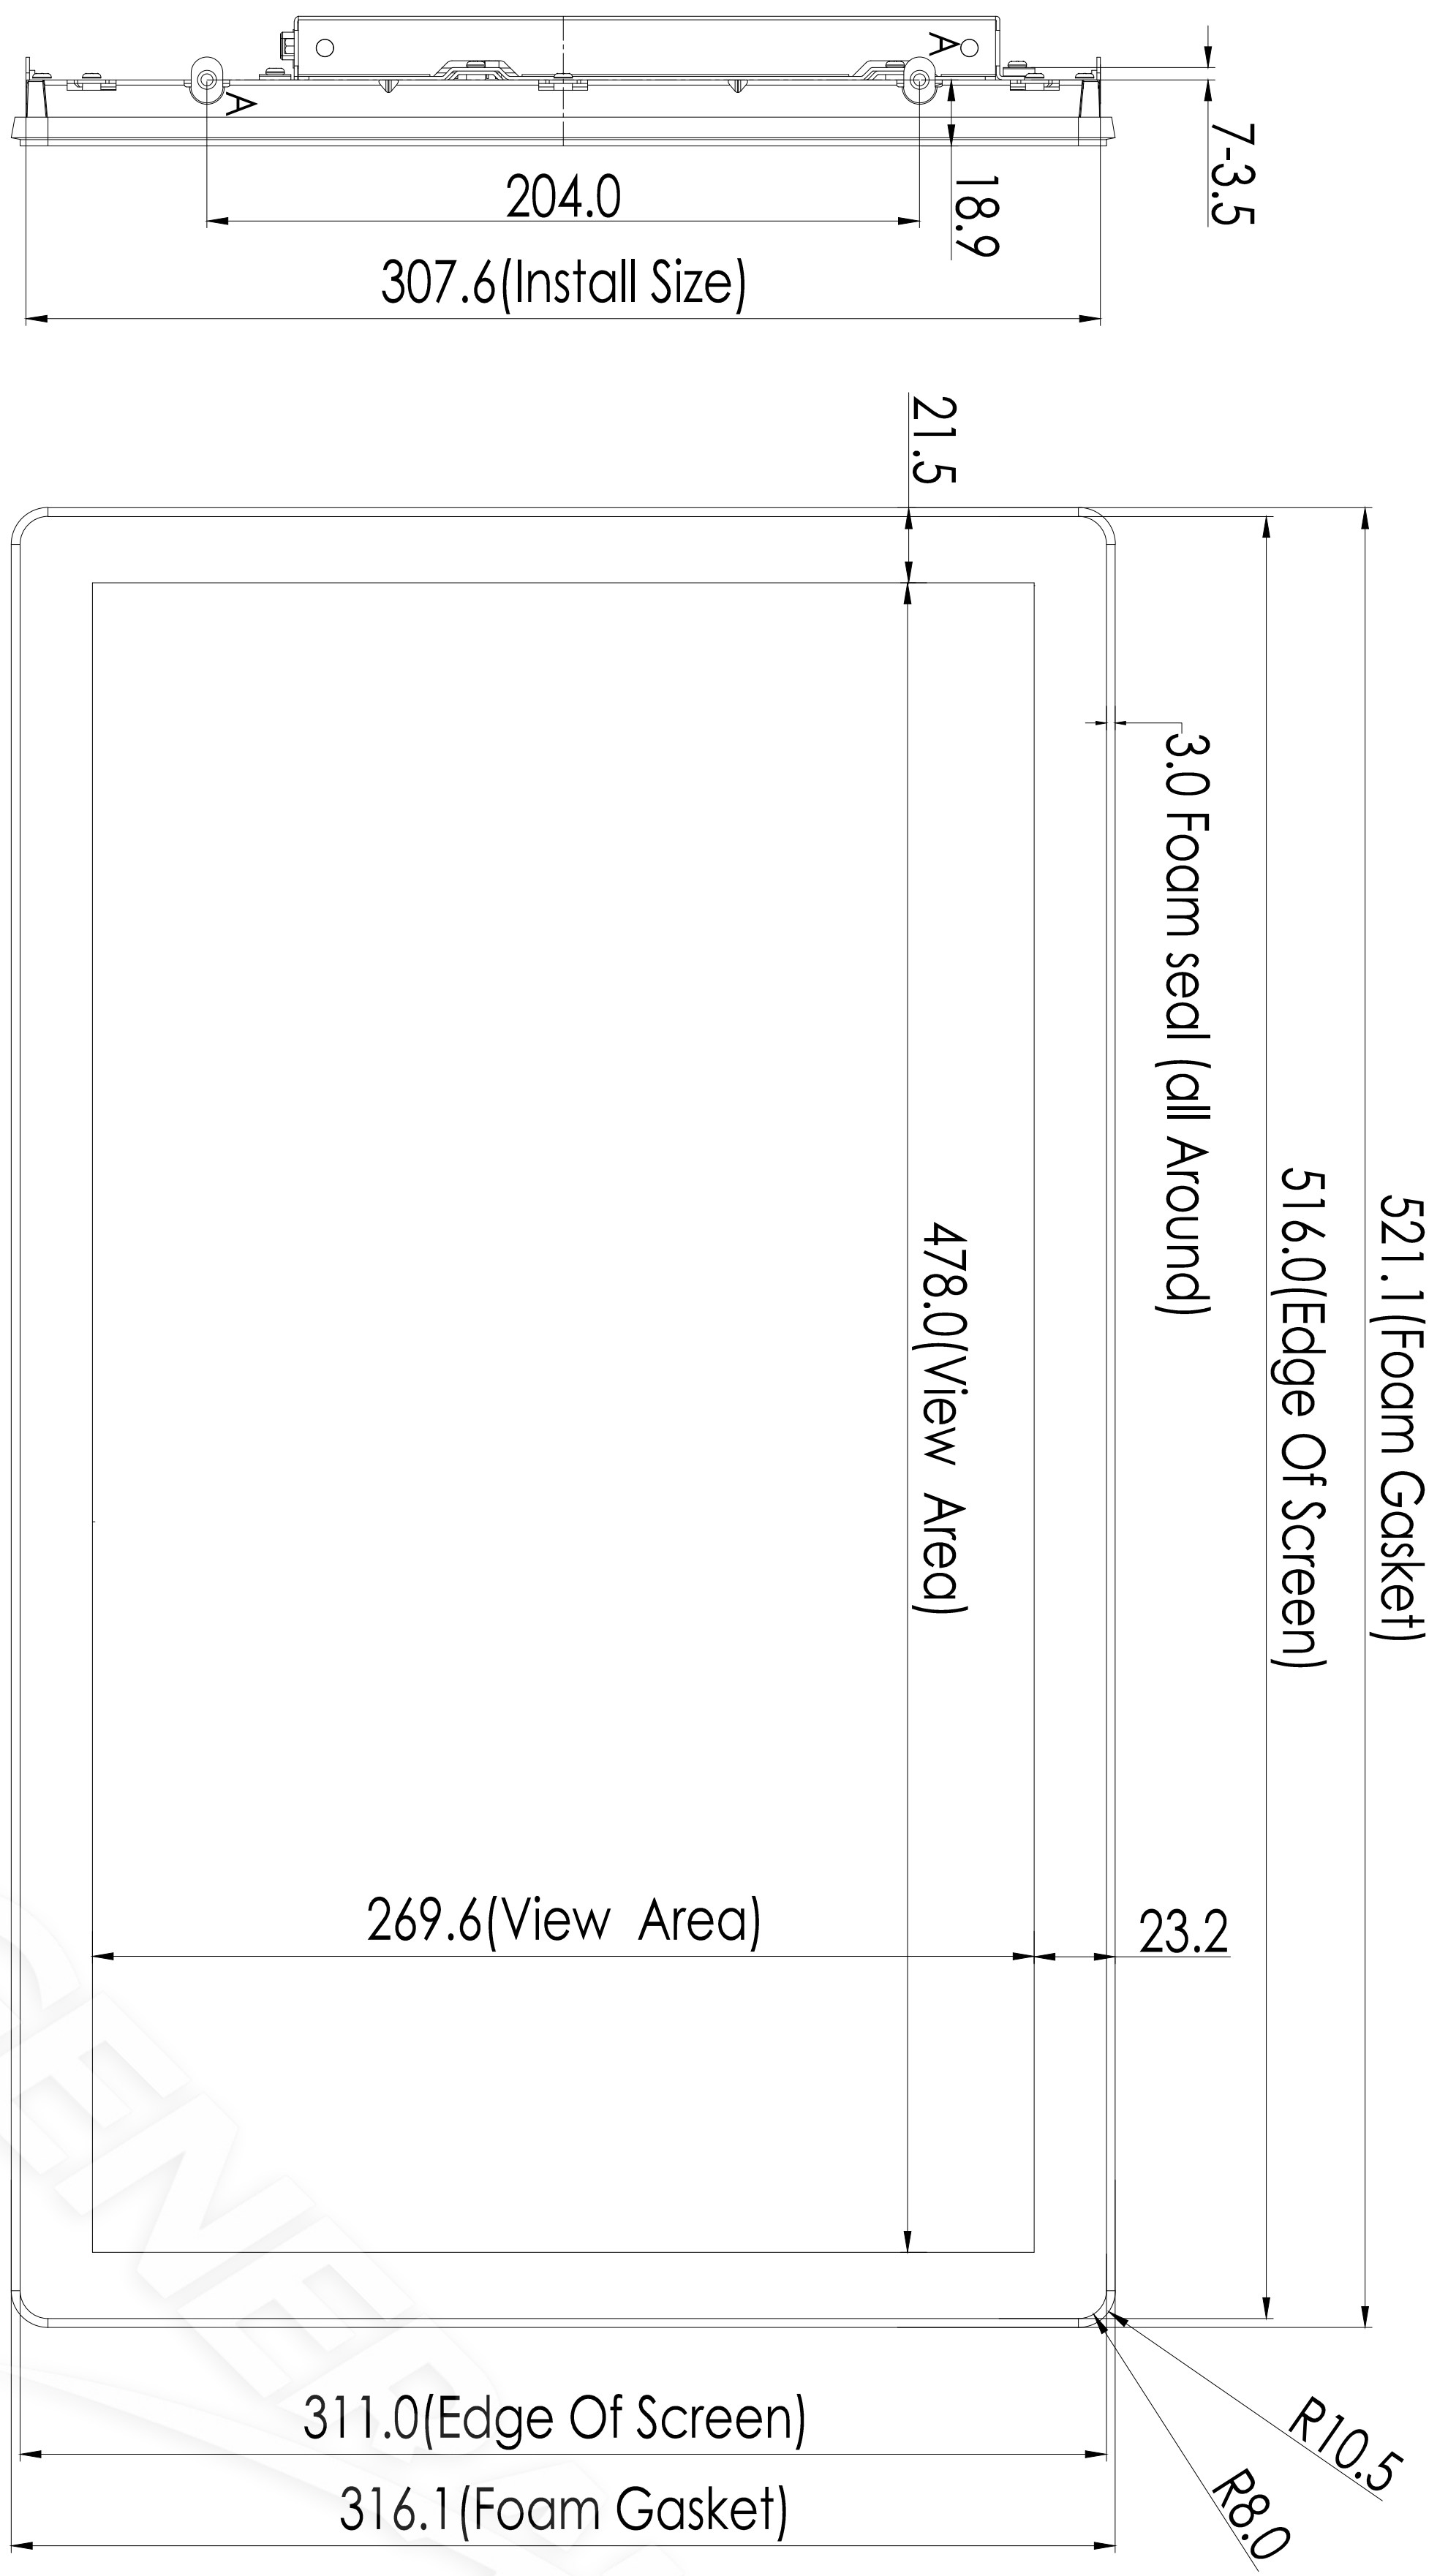


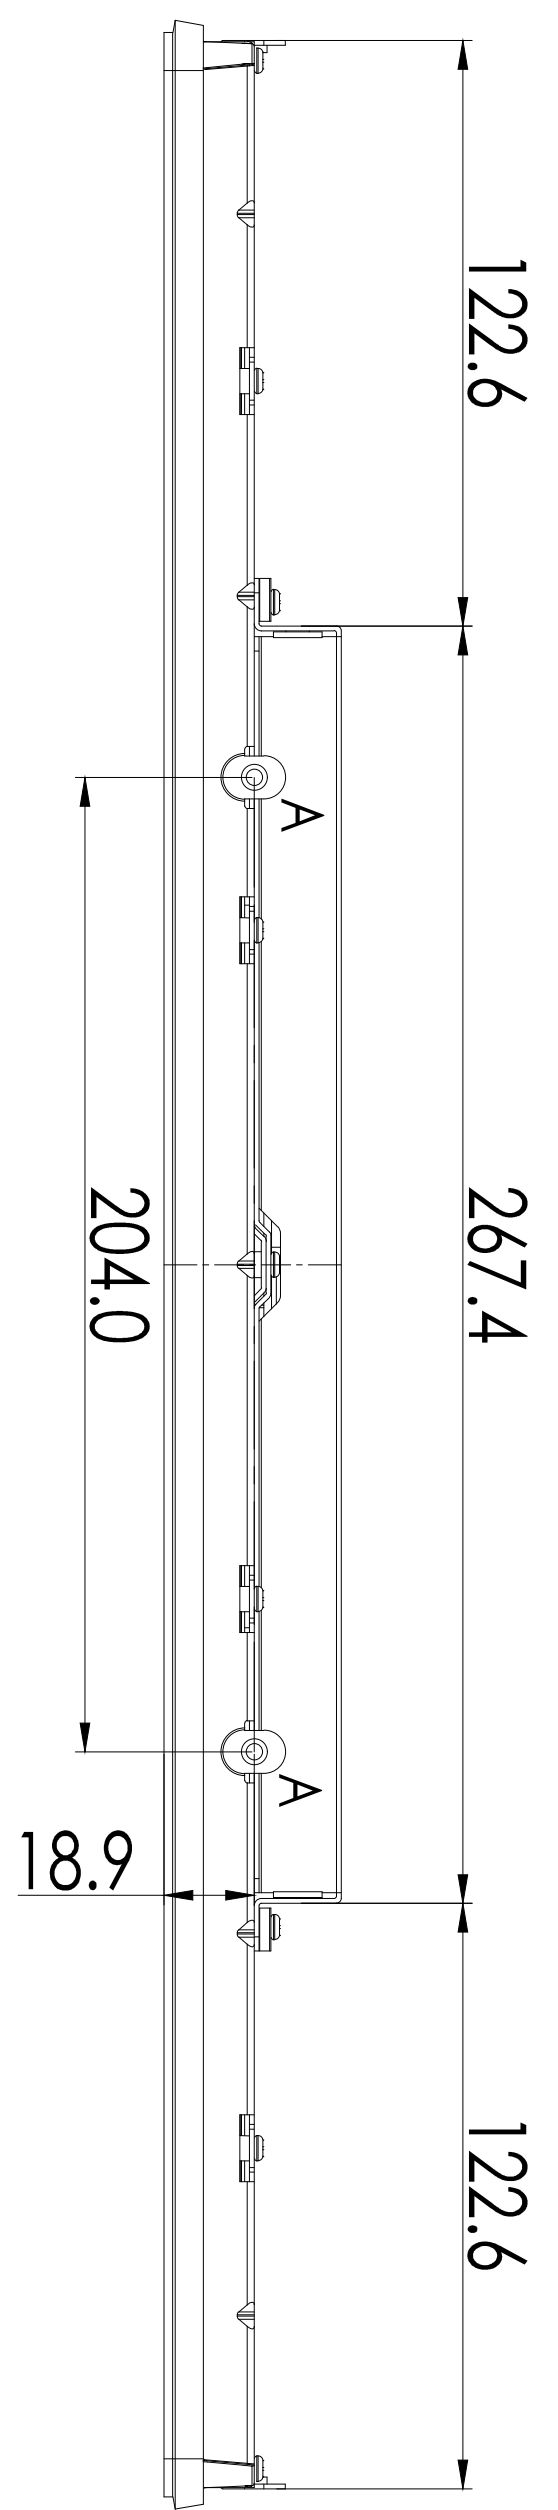


TITL	
MARK	
△	


A:M4 T
B:M4 TI

GENERAL To	
SPECIFICATION	
UNIT	DATE
MM	2025/9/4
PROJECTION:	
SHEET 1 of 3	
VER: 02	SCALE
TOLERANCE: ±1.0M	


DO NOT SCALE DRAWING

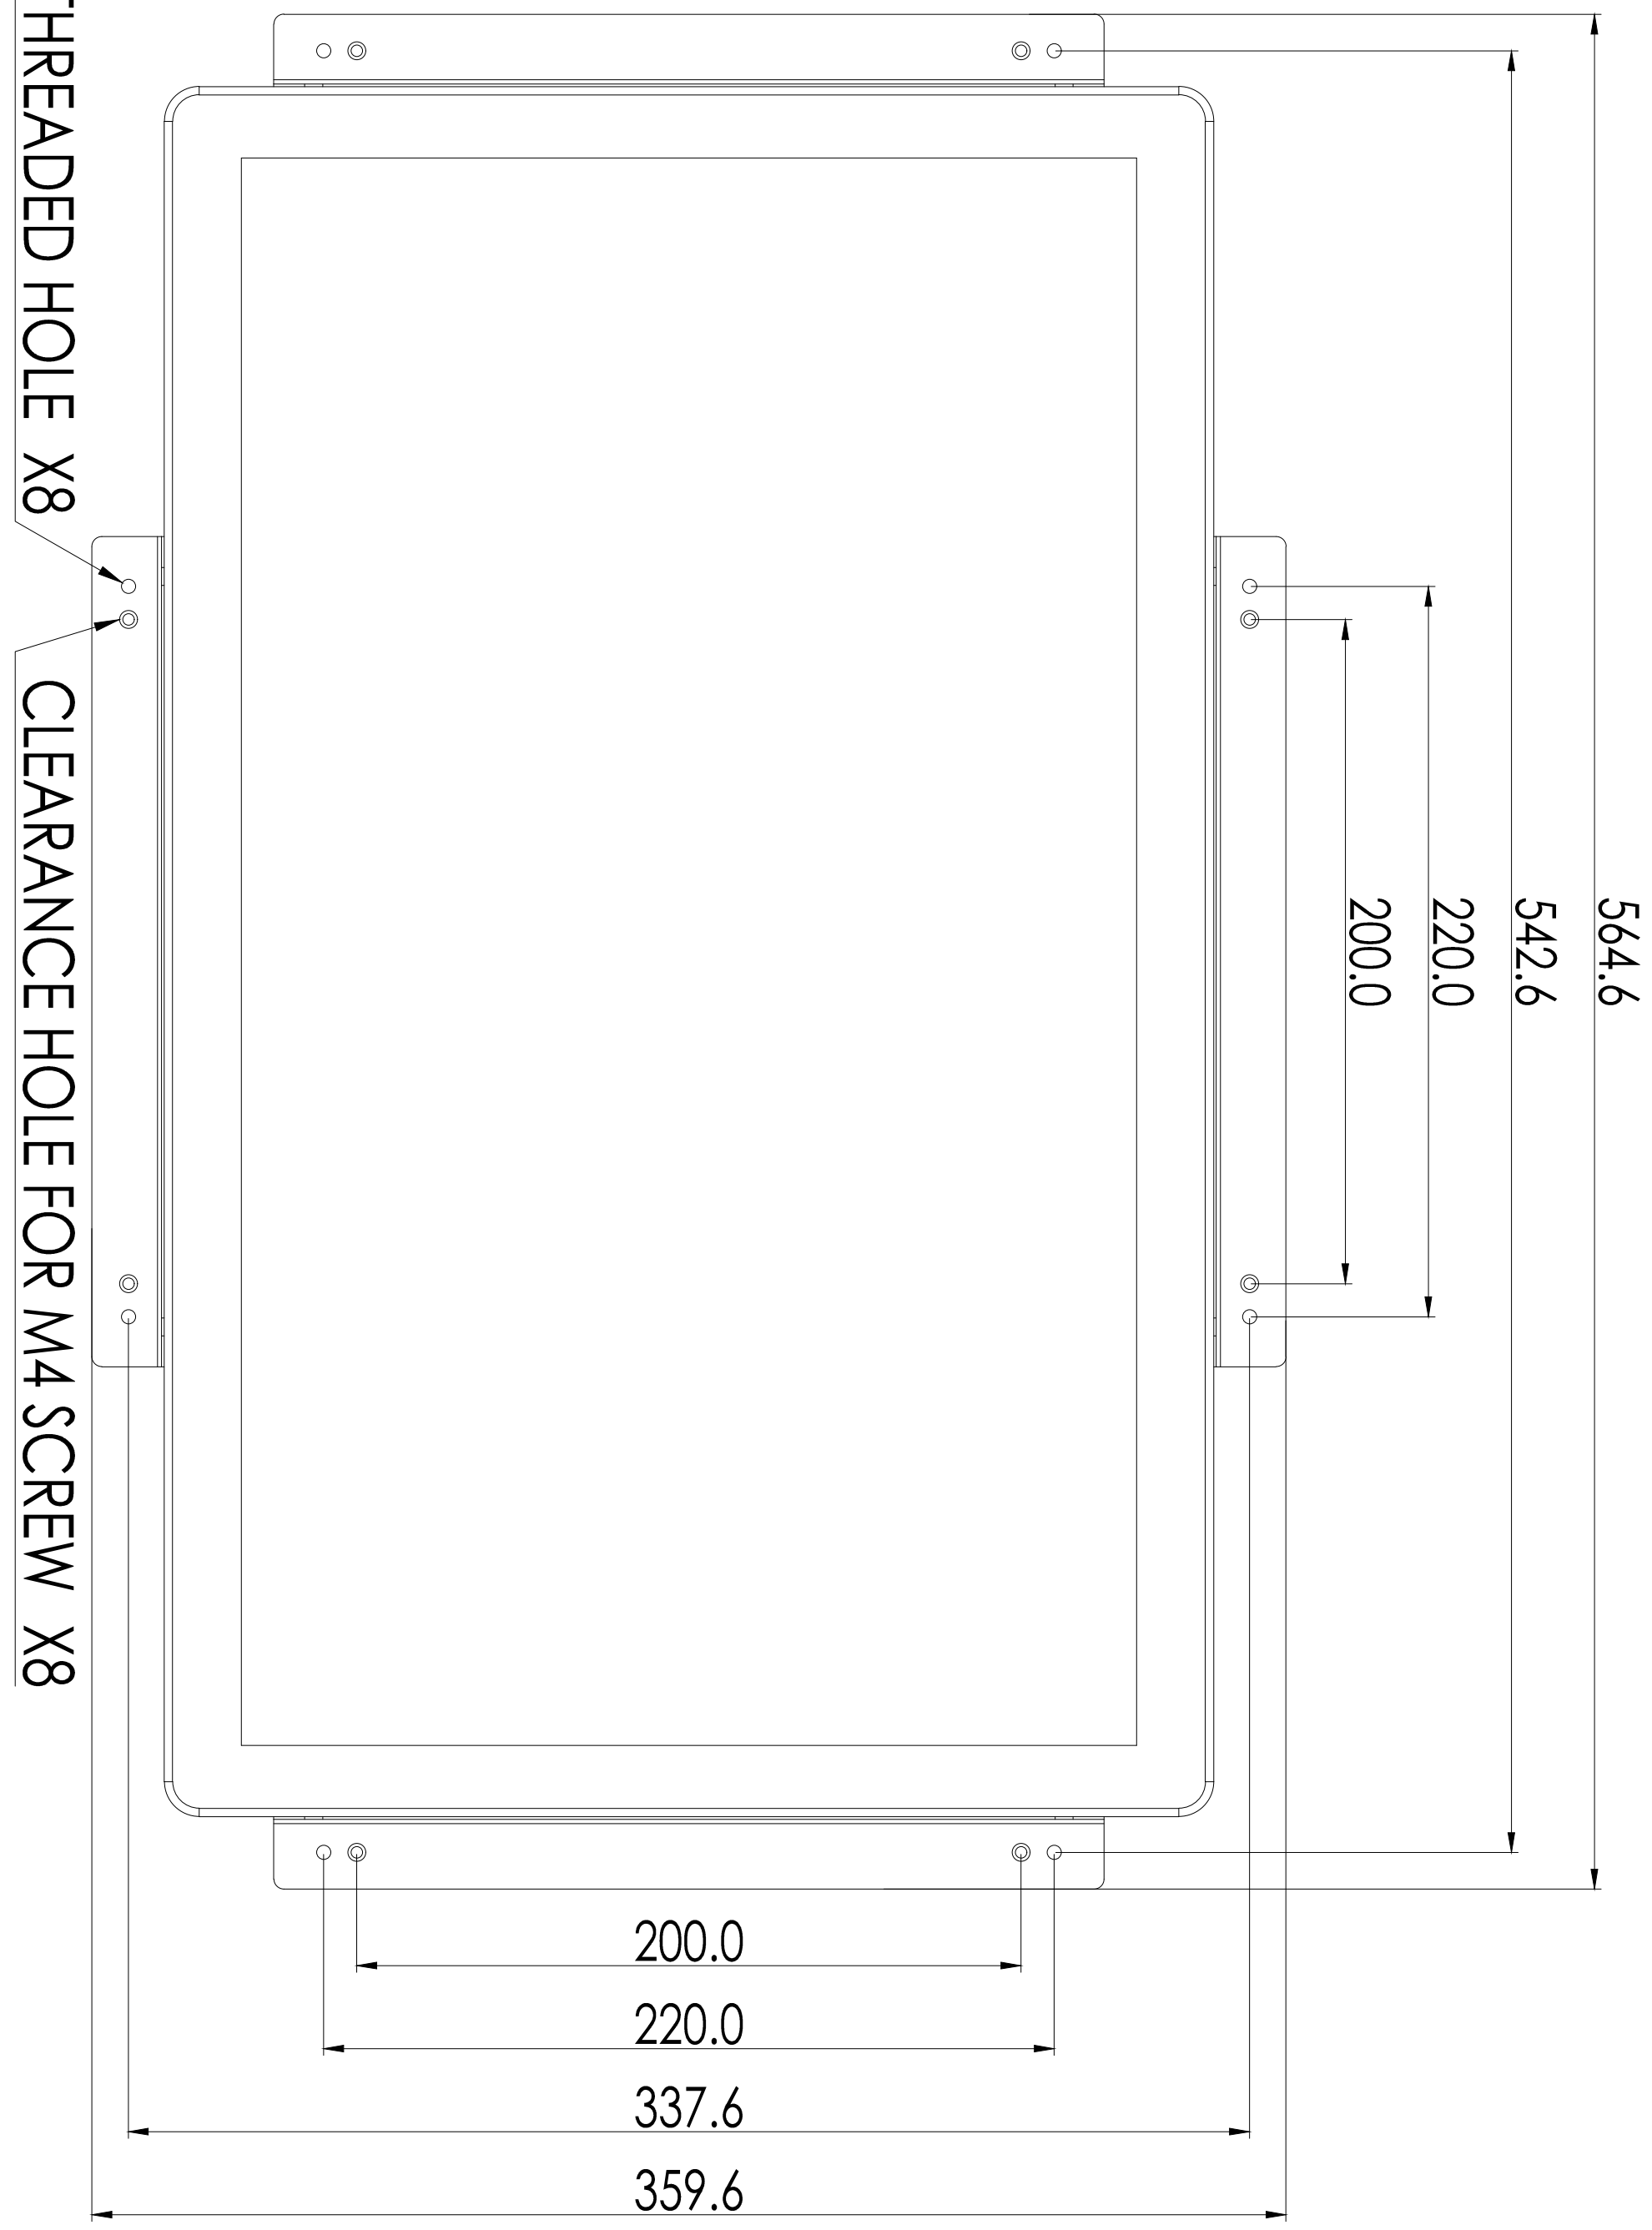


M4 THREADED HOLE X8
CLEARANCE HOLE FOR M4 SCREW X8

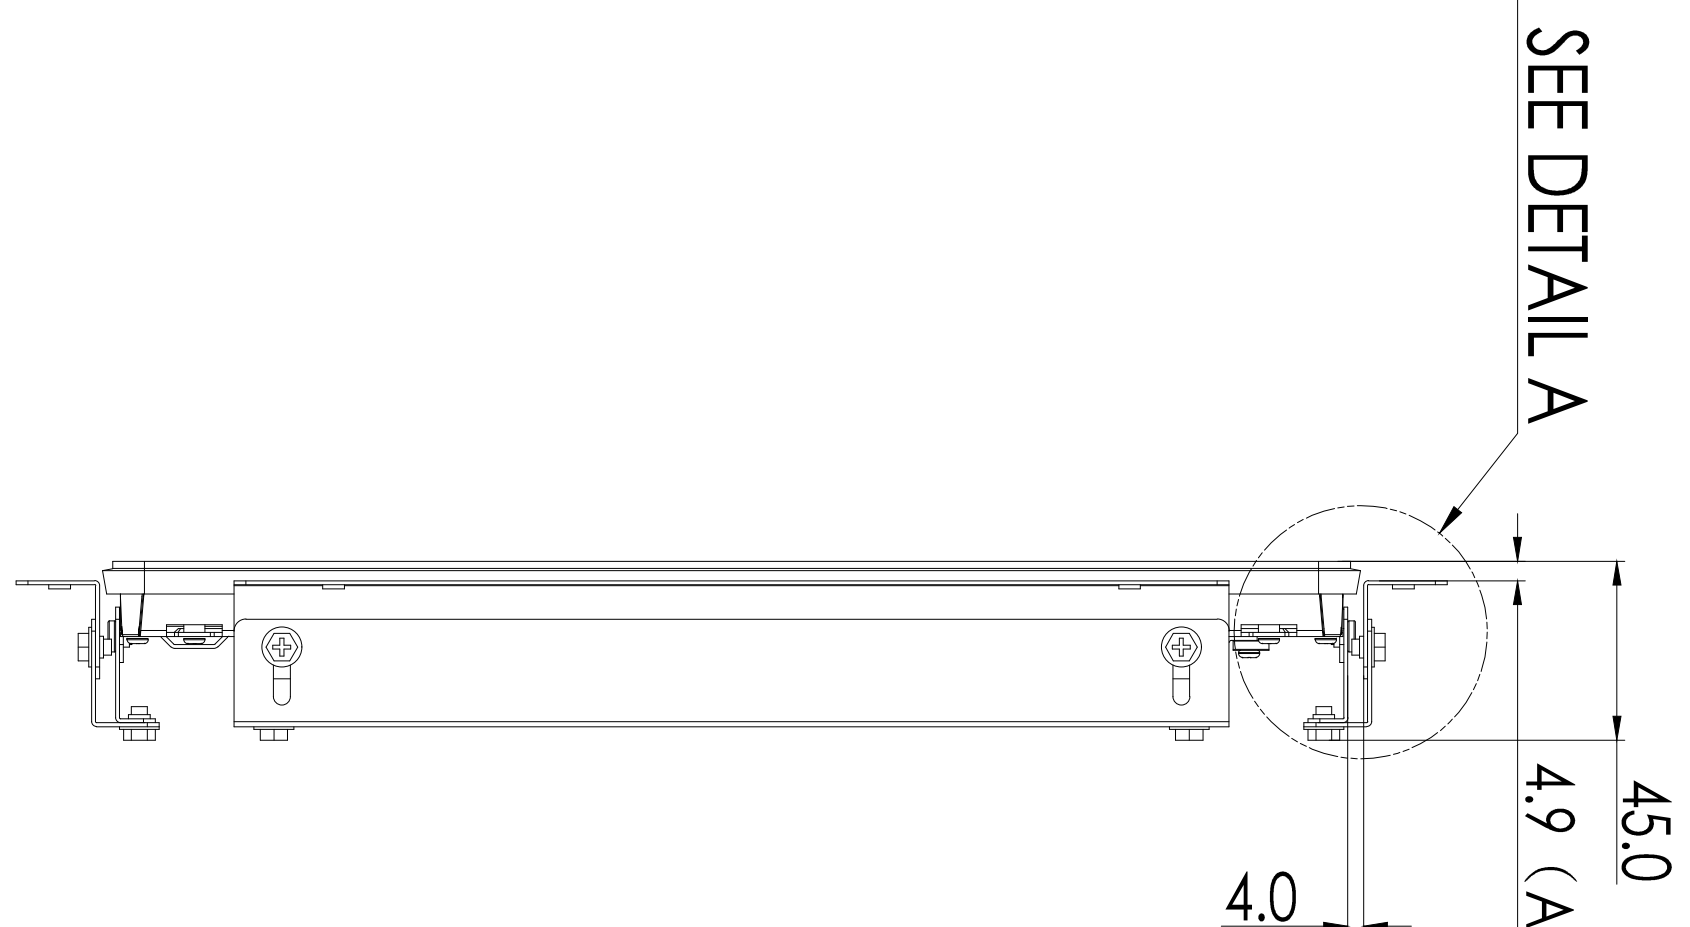

SEE DETAIL A



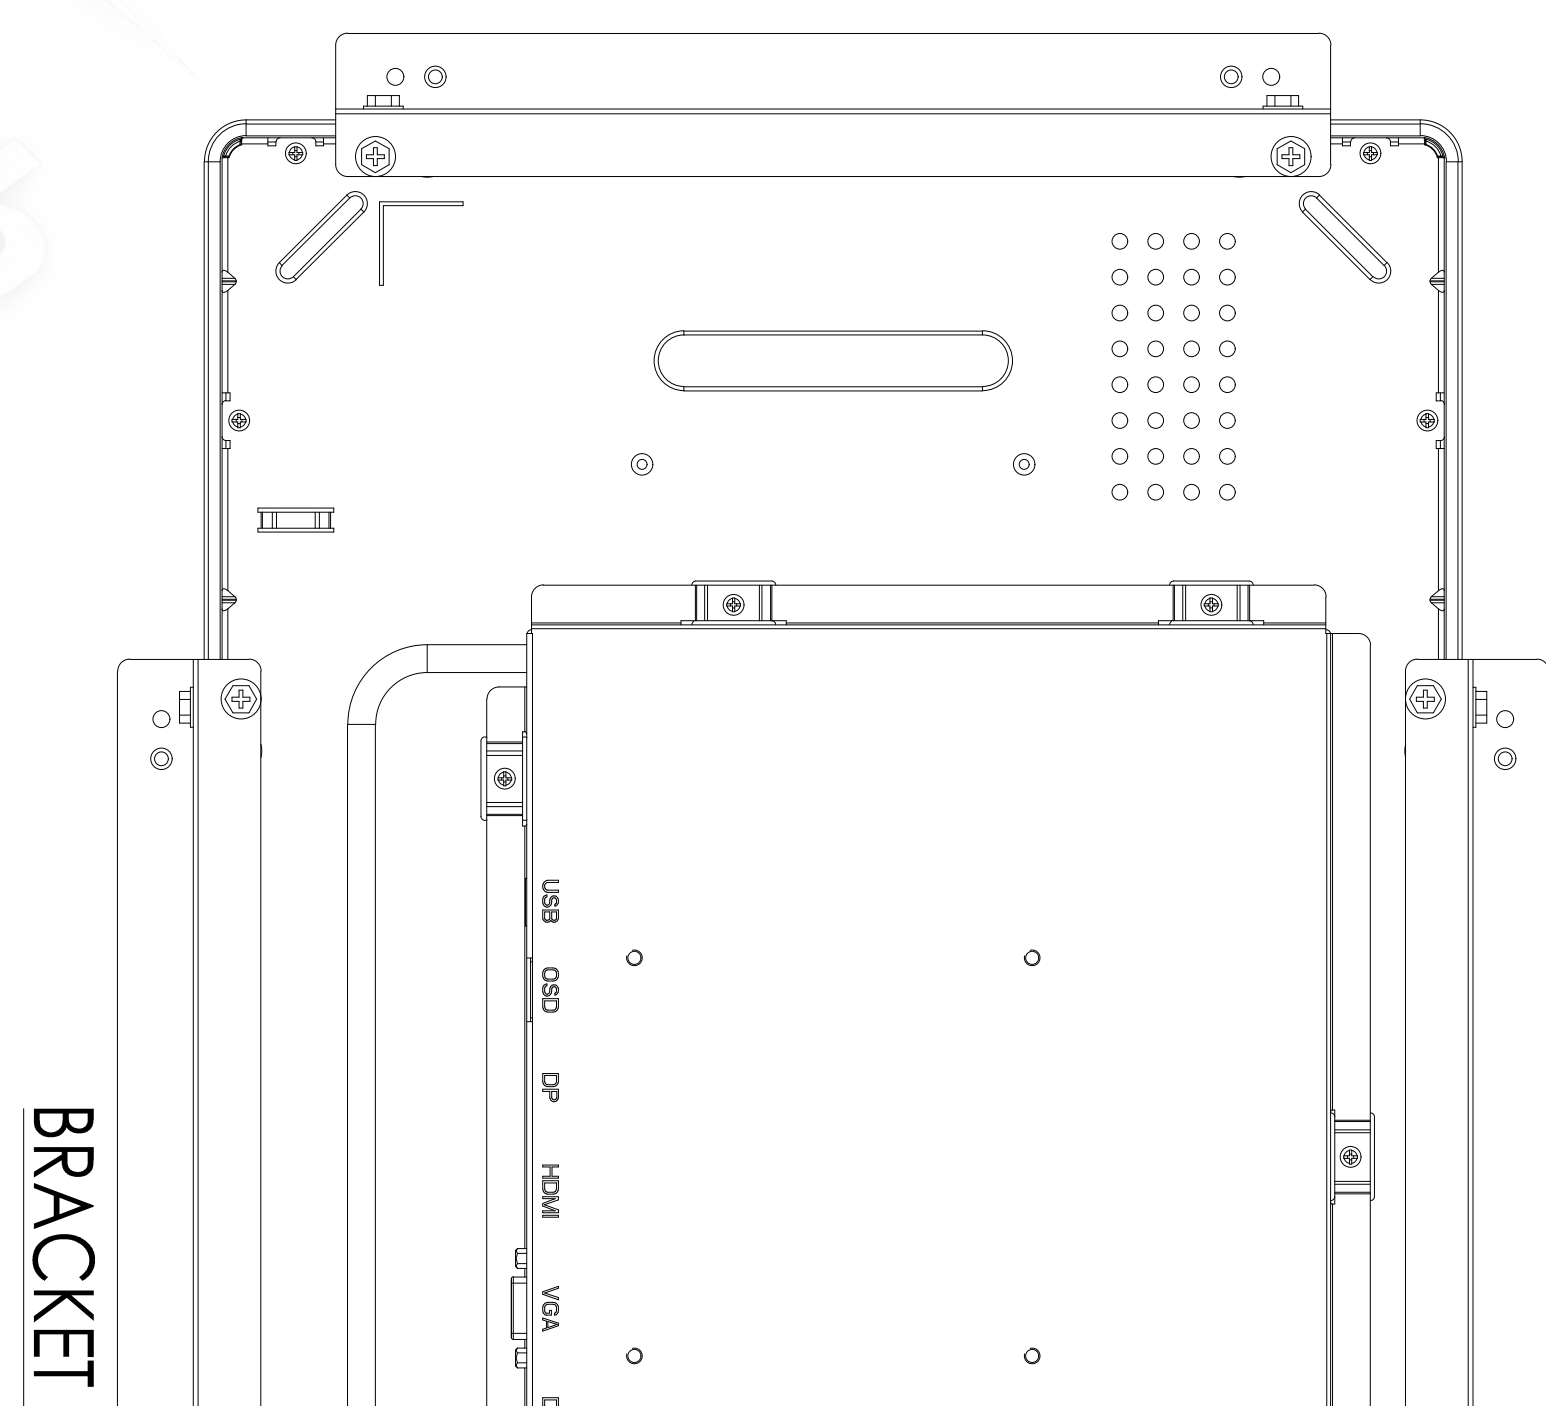


BRACKET

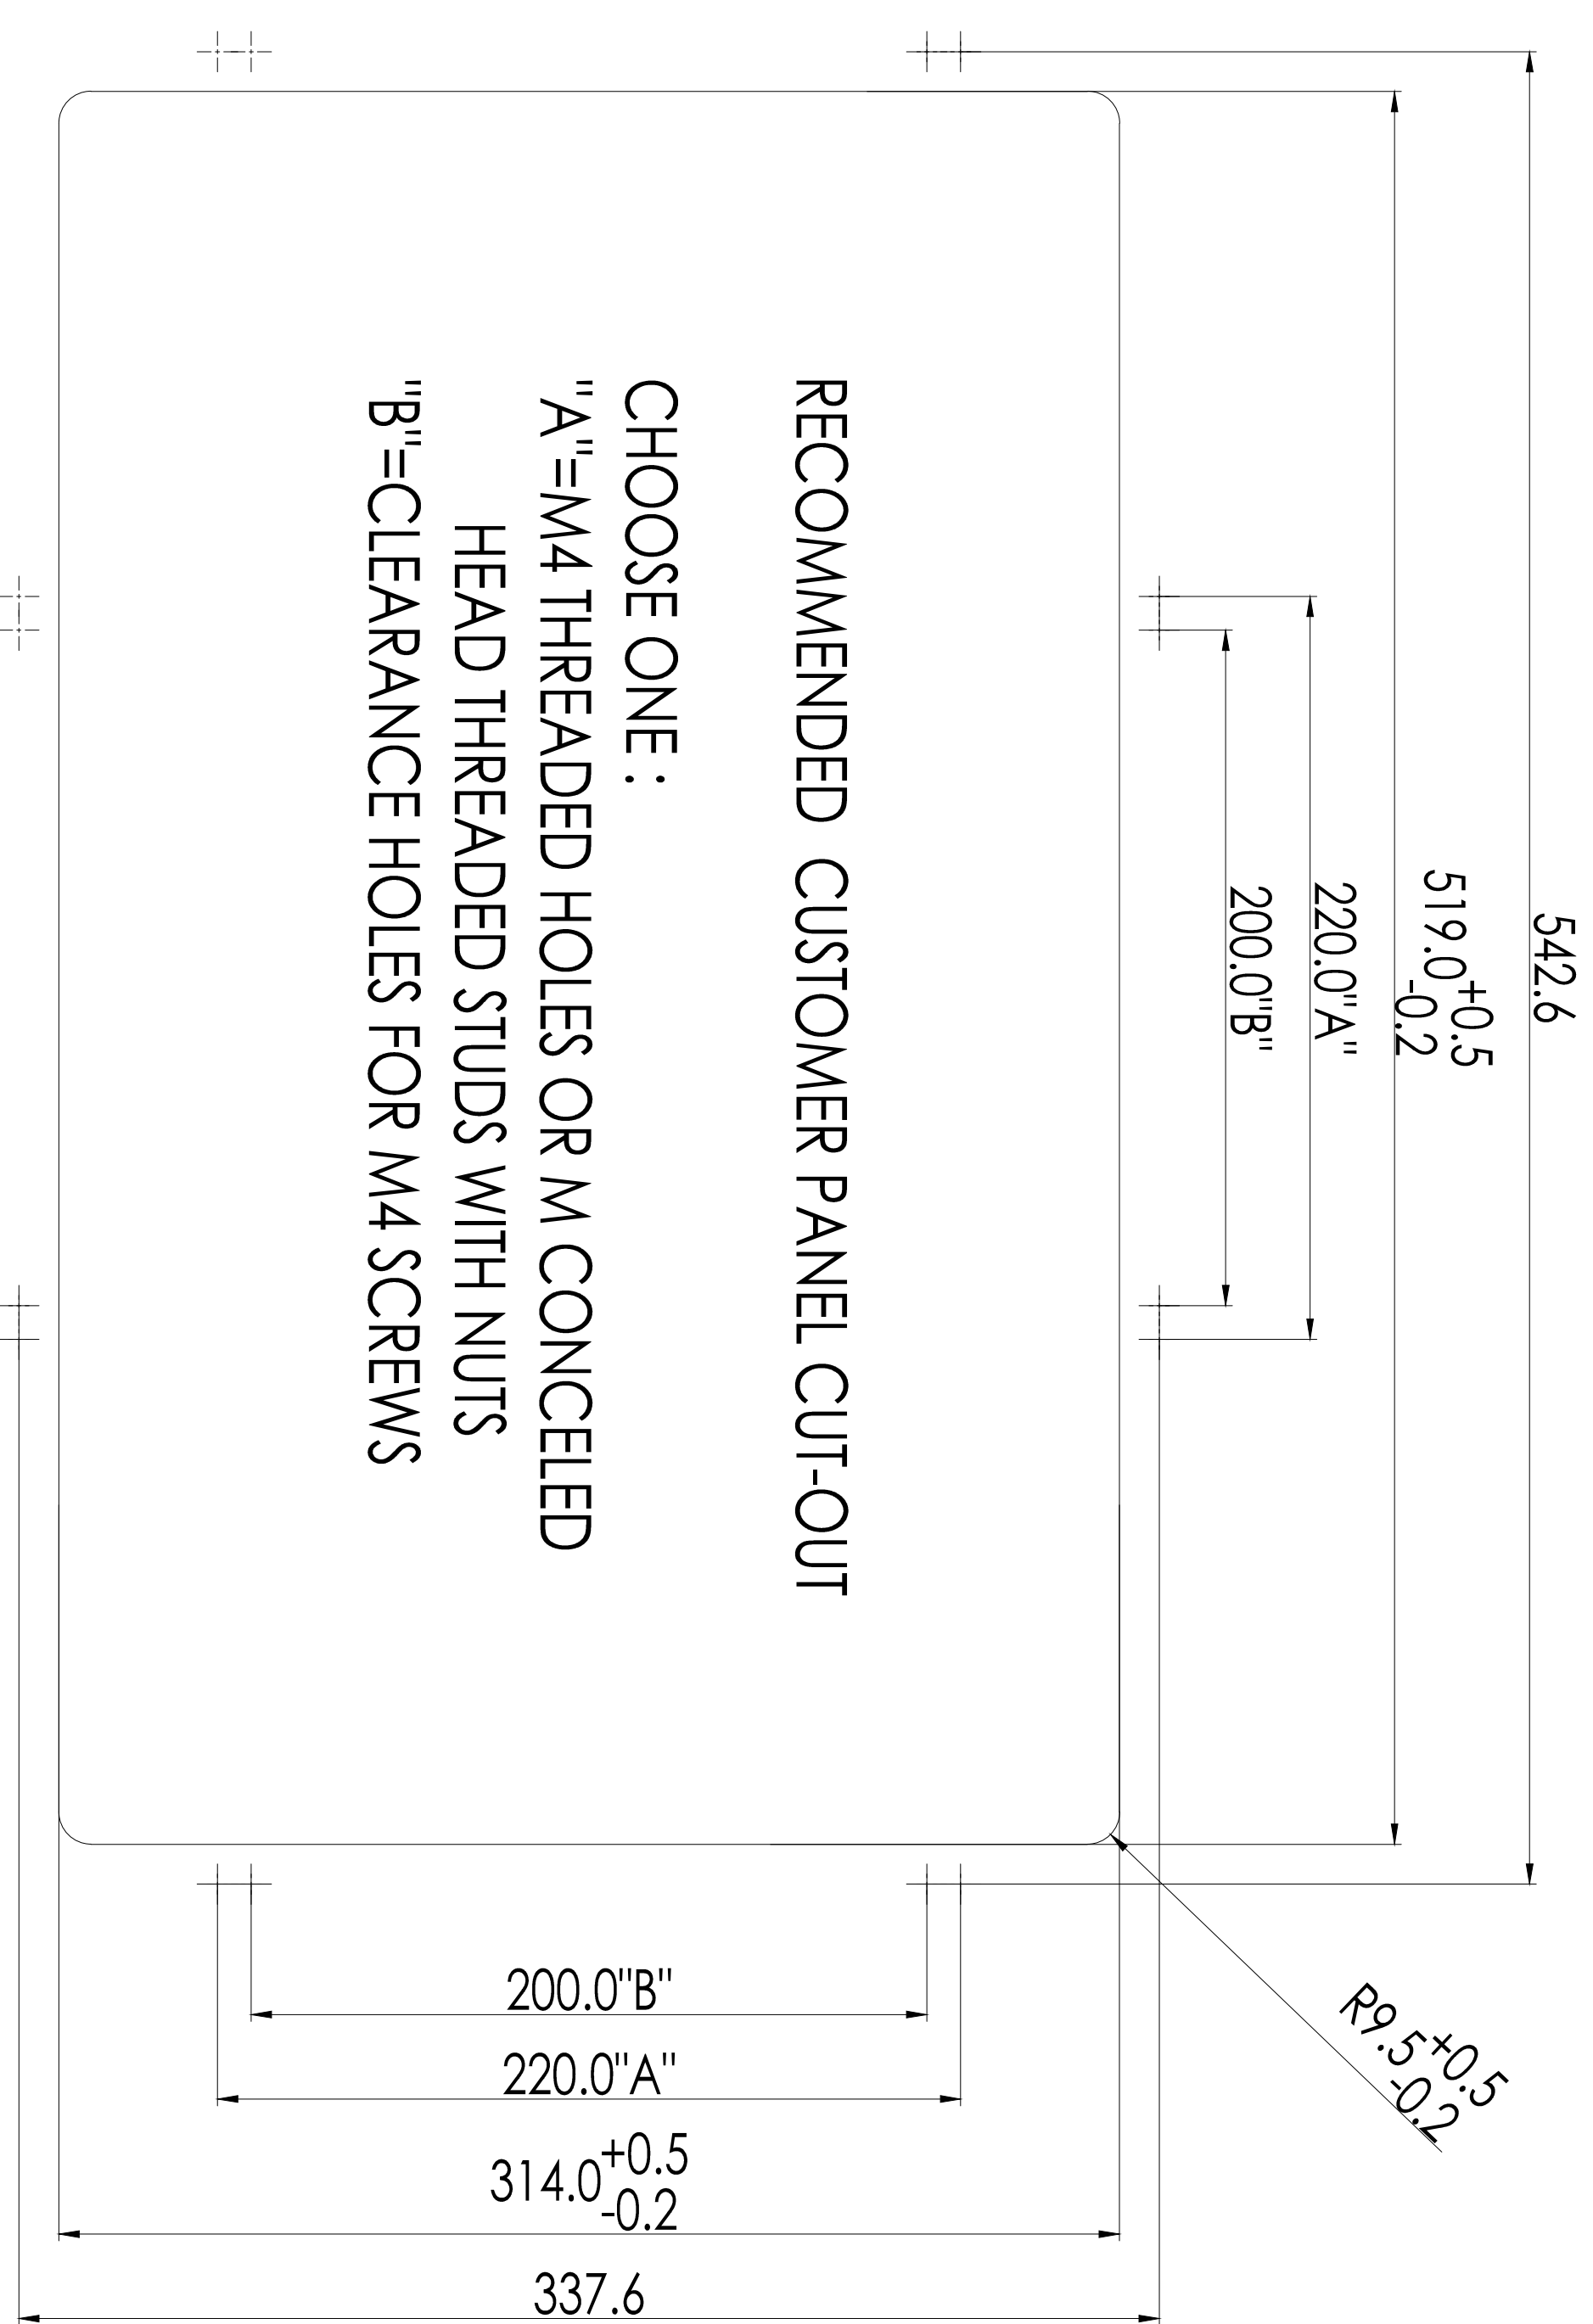

RECOMMENDED CUSTOMER PANEL CUT-OUT

CHOOSE ONE:
"A"=M4 THREADED HOLES OR M CONCEALED
HEAD THREADED STUDS WITH NUTS
"B"=CLEARANCE HOLES FOR M4 SCREWS

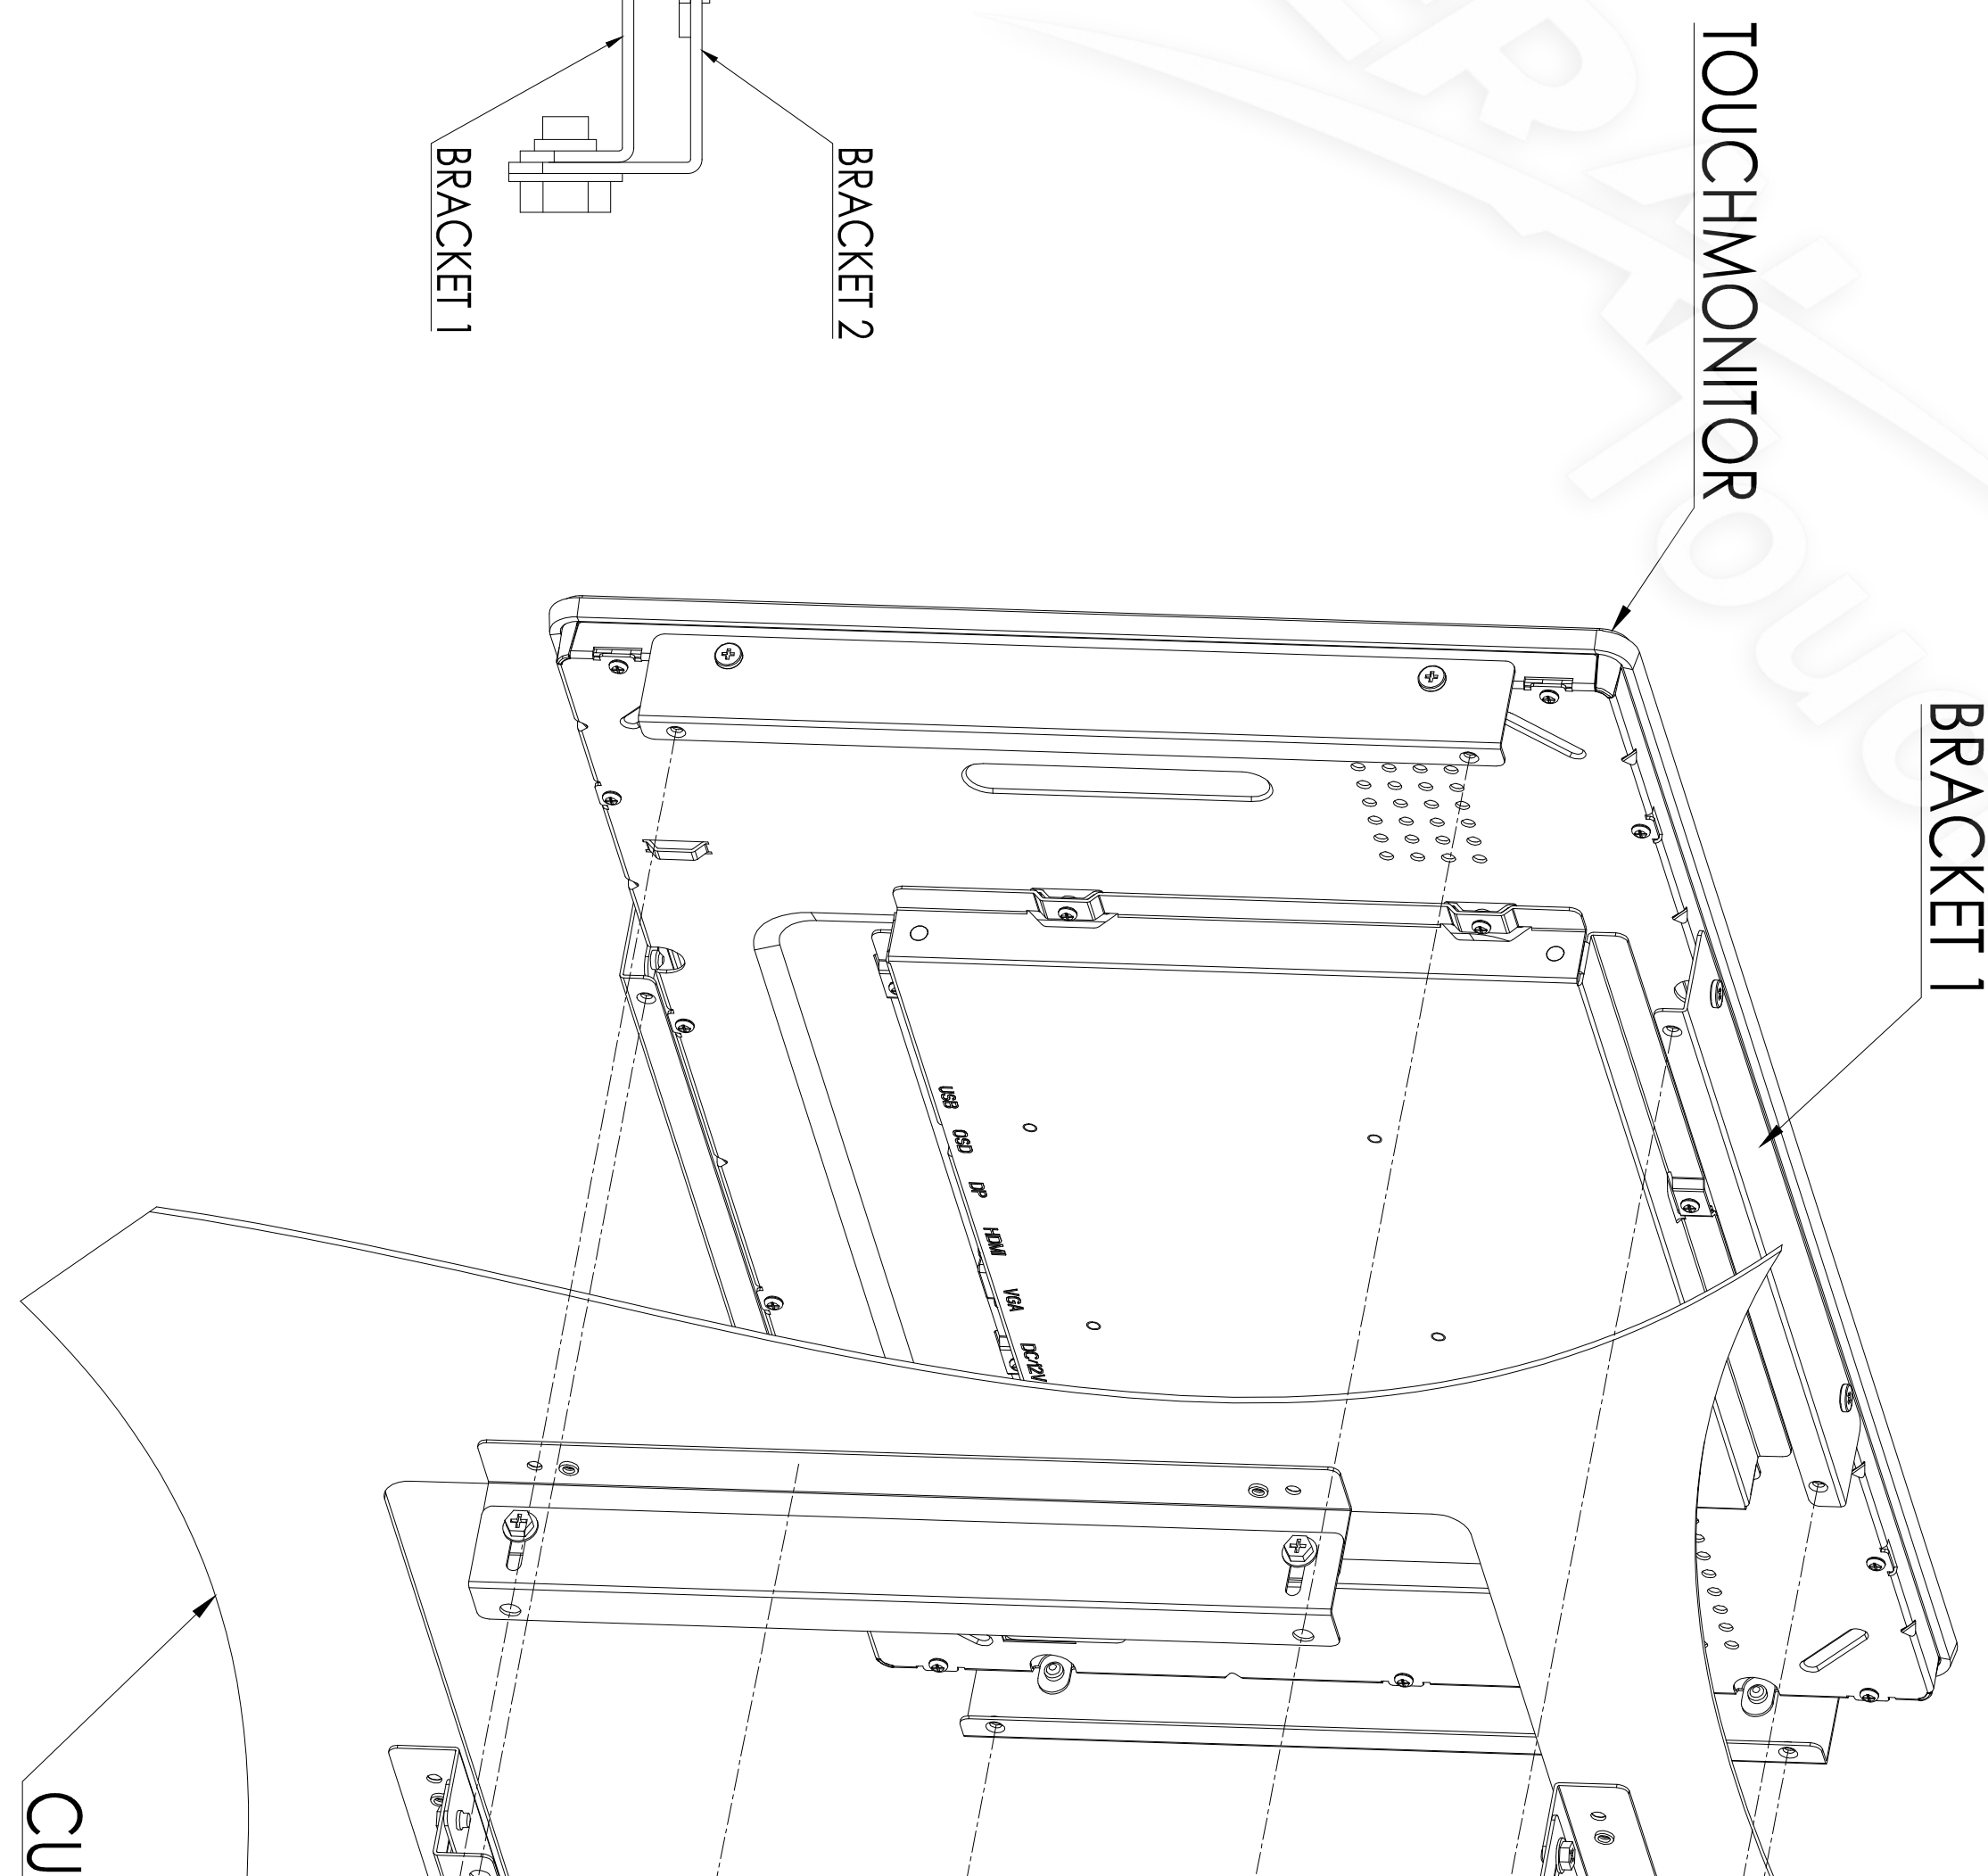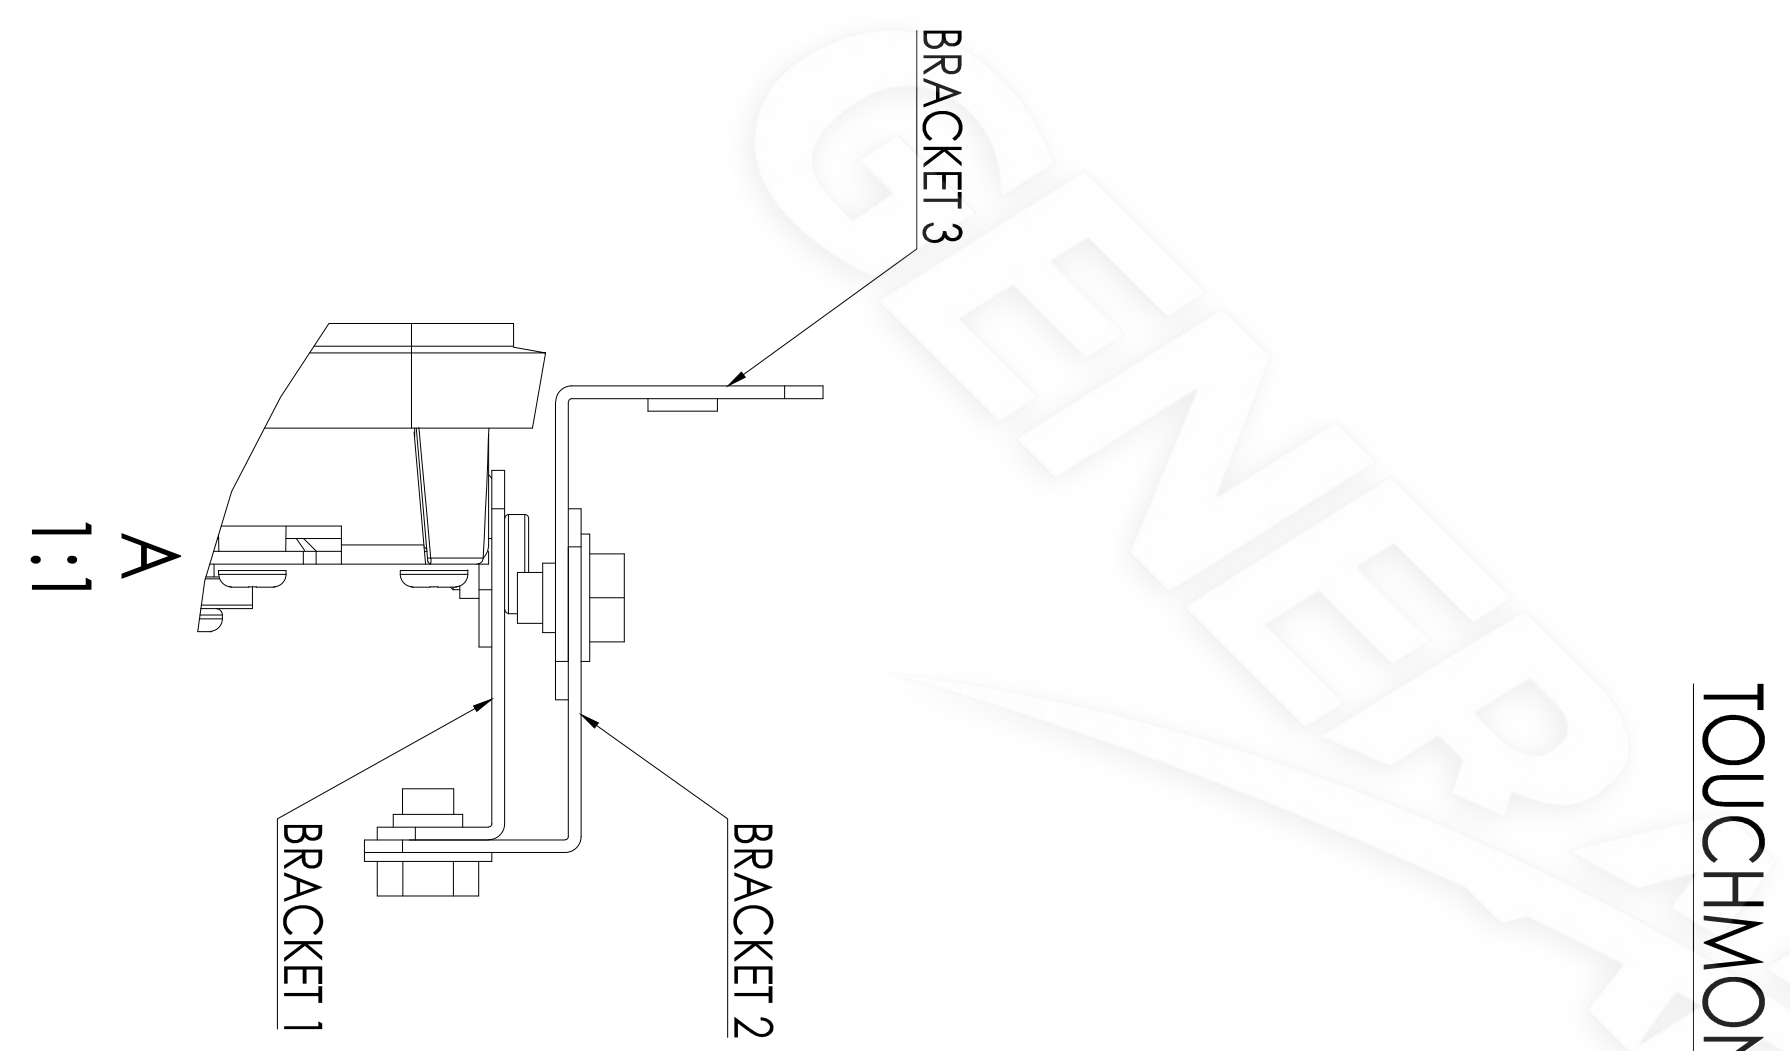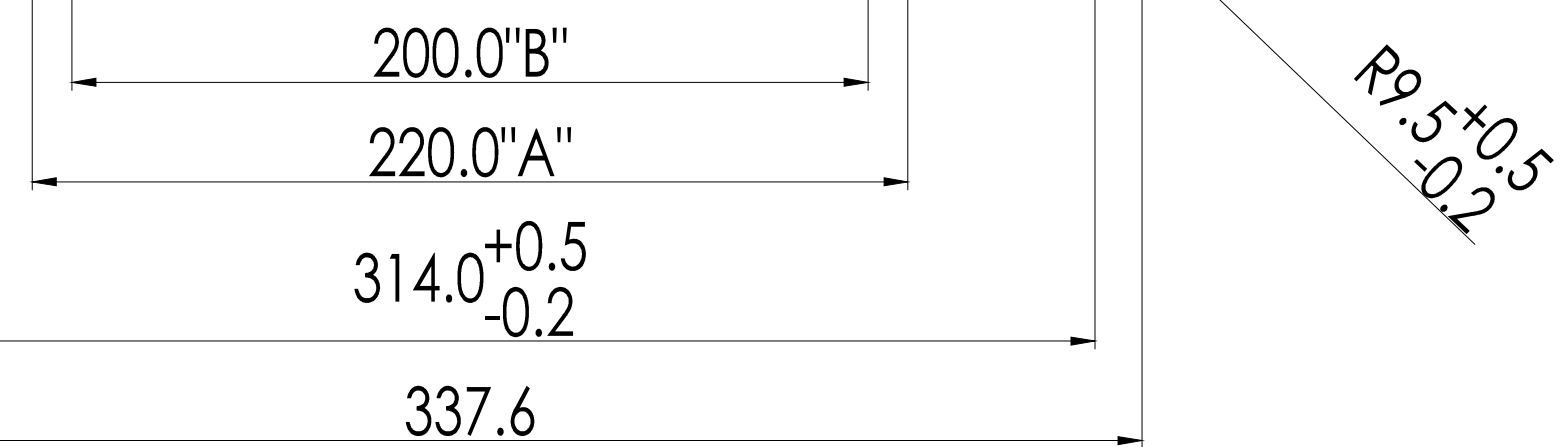

INSTALLATION NOTES:

1. ATTACH BRACKET 1 TO TOUCHMONITOR (ALL FOUR SIDES) WITH LOW PROFILE SCREWS (INCLUDED)
2. ATTACH BRACKET 3 TO CUSTOMER PANEL PRE CUT-OUT DRAWING (ALL FOR SIDES)
3. ATTACH BRACKET 2 TO BRACKET 3 ON ALL FOUR SIDES WITH M HEX HEAD SCREWS (INCLUDED)
4. ADJUST DEPTH OF BRACKET 2 SO MONITOR IS FLUSH WITH CUSTOMER PANEL
5. PLACE TOUCHMONITOR INTO CUSTOMER PANEL OPENING
6. SECURE TOUCHMONITOR TO BRACKET 2 FROM BEHIND WITH M4 HEX HEAD SCREWS (INCLUDED)

DO NOT SCALE DRAWING

TITL	MARK
	A

GENERAL	SPECIFICATION
UNIT	DATE
MM	2025/9/4
PROJECTION:	
SHEET 3 of 3	SCALE
VER: 02	TOLERANCE: ±1.0M