TFT LCD MODULE

29.4" Bar-Type High-Brightness TFT LCD

2500 nit 1920 × 720 bar-type display with LVDS interface — sunlight-readable, Hi-Tni design.

DCL P/N **101042-01**

TAA COMPLIANT

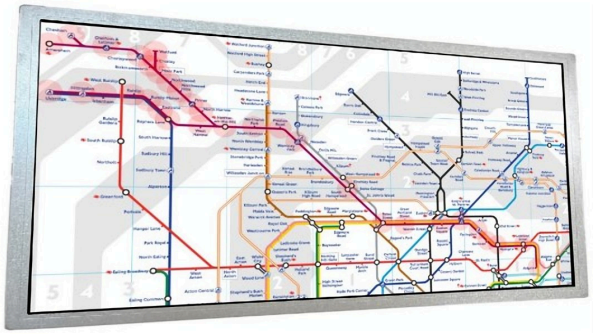

29.4"	2500	1920×720	-20~70°C
DIAGONAL	NITS	BAR-TYPE	OPERATING

KEY FEATURES

- 178° / 178° viewing angle
- 2500 nit LED backlight — sunlight-readable
- Ultra-wide 1920 × 720 bar format for signage, transit and instrument panels
- 4000:1 contrast ratio
- -20 °C to +70 °C operating range with Hi-Tni liquid crystal
- LVDS interface
- Touch panel, cover glass and optical bonding available
- Custom FPC, cable assembly and driver-board options

SPECIFICATIONS

Size	**29.4" (bar-type)**
Resolution	**1920 × 720**
Display Technology	**TFT LCD, Hi-Tni LC**
Brightness	**2500 cd/m²**
Contrast Ratio	**4000:1**
Viewing Angle (H/V)	**178° / 178°**
Interface	**LVDS**
Operating Temp.	**-20 ~ +70 °C**
DCL Part Number	**101042-01**

APPLICATIONS Transit PIDs · Shelf-edge signage · Instrument clusters · Kiosks · Industrial HMI · Medical displays

Design it in with DCL.

Samples, custom brightness, cover glass, touch tuning and cable assemblies — backed by US-based engineering and in-country factory oversight. **Manufactured in a TAA-compliant geography.**

Request a quote or samples

sales@dcltek.com · 1-800-407-8917
www.dcltek.com

Specifications subject to change without notice. Image is representative of the product family.