

LCD TOUCH DISPLAY MODULE

7" WSVGA Resistive Touch Display Module


Integrated LCD + resistive touch module, 400–1500 nit brightness options, ready to drop into your enclosure.

DCL P/N

312338-01



TAA COMPLIANT

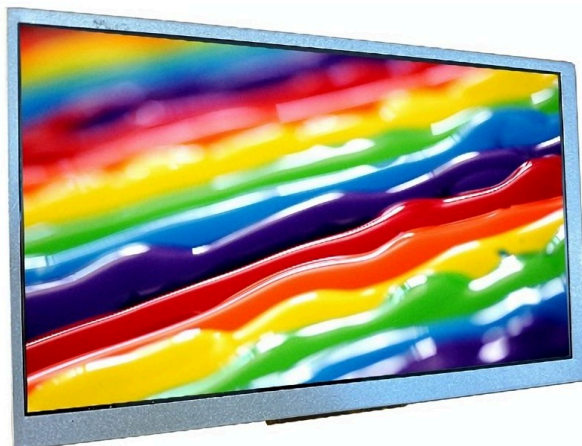

7"

DIAGONAL

1500

NITS MAX

1024×600

WSVGA

RTP

TOUCH

KEY FEATURES

- 4/5-wire resistive touch — works with gloves and stylus
- Brightness options from 400 to 1500 nits for indoor to sunlight-readable use
- 1024 × 600 WSVGA resolution
- LVDS video interface
- USB touch interface, RS232 optional
- Factory-integrated LCD, touch sensor and cover glass — one part number
- Optical bonding, AG / AR / AF glass and custom cover-lens printing available

SPECIFICATIONS

Size	7" (WSVGA)
Resolution	1024 × 600
Touch Type	Resistive (RTP)
Touch Interface	USB (RS232 opt.)
Display Interface	LVDS
Brightness	400 ~ 1500 cd/m ² (options)
Active Area	154.2 × 85.9 mm
Module Outline	164.9 × 100 mm
DCL Part Number	312338-01

APPLICATIONS Industrial HMI · Medical devices · EV charging · Kiosks

Design it in with DCL.

Samples, custom brightness, cover glass, touch tuning and cable assemblies — backed by US-based engineering and in-country factory oversight. **Manufactured in a TAA-compliant geography.**

Request a quote or samples

sales@dcletek.com · 1-800-407-8917

www.dcltek.com