
Request information

# Aura Touch Computer






- **The pulsating LED frame creates a warm, inviting atmosphere that turns functional interactions into delightful experiences.**
- **Customize lighting effects—colors, patterns, speed—to reflect your brand's identity.**

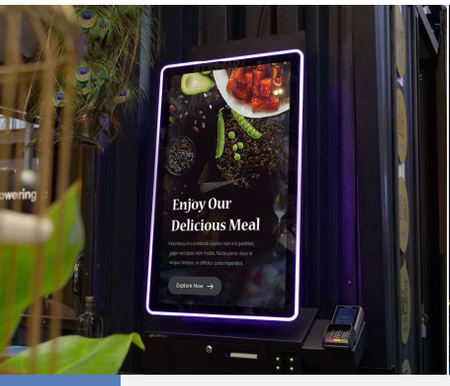





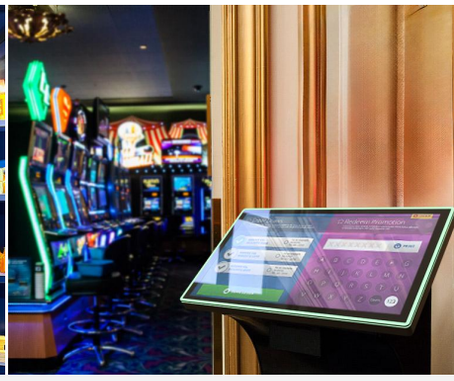

## Features & Benefits

- **Add Personality to Your Software**
  Your software deserves a stage. The Aura Series wraps it in mystique and glamour with an LED-framed design that dazzles users—making your service platform instantly recognizable and irresistibly engaging.
- **Build Unforgettable Brand Recognition**
  Customize lighting effects—colors, patterns, speed—to reflect your brand's identity. GT's Aura Series ensures your kiosk doesn't just blend in; it stands out as a trendsetter, leaving a lasting impression on users.
- **Enhance Customer Experience**
  Transform routine transactions ( payments, check-ins, check-outs) into memorable moments. The pulsating LED frame creates a warm, inviting atmosphere that turns functional interactions into delightful experiences.
- **Accelerate Deployment**
  Save time with multiple OS compatibility (Android/Windows/Linux) and proven hardware performance. Versatile mounting options (countertop, floor-standing, wall-mount and ceiling-mount) adapt to any environment, slashing setup time and ensuring seamless integration with your existing systems.

## SPECIFICATIONS

| | | |
|---|---|---|
| Product Name | 21.5 Inch Android AIO | |
| Model | ATL22E | |
| **Motherboard Parameters** | | |
| SoC | Rockchip, RK3576, Quad-core Cortex-A72 + Quad-core Cortex-A53 | |
| GPU | Mali-G57 MC3 | |
| Memory | 8GB | |
| Storage | 64G, eMMC5.1 on board | |
| Operating System | Android 14 | |
| Wi-Fi & Bluetooth | Onboard Module | |
| **LCD Panel Parameters** | | |
| Display Technology | Active Matrix TFT-LCD with LED Backlight | |
| Aspect Ratio | 16:9 | |
| Active Display Area (W x H) | 477.2mm x 268.7mm | |
| Native Resolution | 1920 x 1080 | |
| Response Time (Typ.) | 18ms | |
| Display Colors | 16.7M | |
| Luminance (Typ.) | 350nits | |
| Contrast Ratio (Typ.) | 3000:1 | |
| Viewing Angle (Typ.) | Horizontal (Left/Right) CR≥10 | 178° (89° /89° ) |
| | Vertical (Ulp/Down) CR≥10 | 178° (89° /89° ) |
| **Touchscreen Parameters** | | |
| Touch Technology | PCAP | |
| Touch Point | 10 | |
| Light Transmission | ≥85% | |
| Thickness | 3.0mm ± 0.2mm | |



Proudly supported by DCLTEK in the USA WWW.DCLTEK.COM 1-800-407-8917 SALES@DCLTEK.COM

| I/O Port | |
|---|---|
| LAN | 2 x RJ45 (10/100/1000Mbps) |
| USB | 4 x USB 3.0 (Type-A) |
| Display | 1 x HDMI out |
| Storage Expansion | 1 x TF card slot |
| Audio | 1 x Headphone connector |
| Power | 1 x DC Jack (Pin Outer Diameter 2.5mm) |
| **Overall Parameters** | |
| Bezel/Case Colour | Black |
| Mounting Options | VESA 75mm x 75mm, 100mm x 100mm |
| Outline Dimensions | 531.0mm x 323.0mm x 60.5mm |
| Input Voltage Range | 12V DC ± 5% |
| Speaker | 2 x 2W Built-in |
| LED Lights Color | Multicolor |
| LED Lights Location | 4 LED lights bar (Front, Back & Edge) |
| Power Consumption | TBD |
| Operating Altitude | ≤3000m |
| Temperature | Operating: 0℃ to 40℃, storage: -20℃ to 60℃ |
| Humidity | Operating: 20% to 80%, storage: 10% to 90%, Non-condensing |
| Carton Dimensions | 651mm x 217mm x 449mm |
| Weight | TBD |
| Agency Approvals | FCC, CE |
| Warranty | 2 years |



Proudly supported by DCLTEK in the USA WWW.DCLTEK.COM 1-800-407-8917 SALES@DCLTEK.COM