
Request information

Aura Touch Computer






- **The pulsating LED frame creates a warm, inviting atmosphere that turns functional interactions into delightful experiences.**
- **Customize lighting effects—colors, patterns, speed—to reflect your brand's identity.**

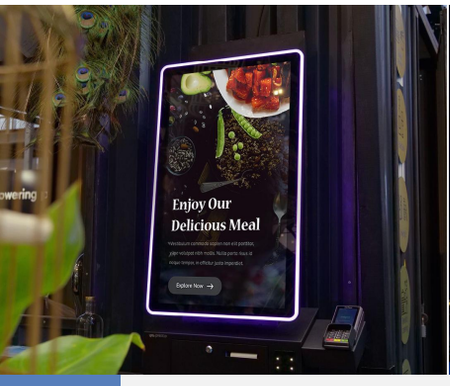



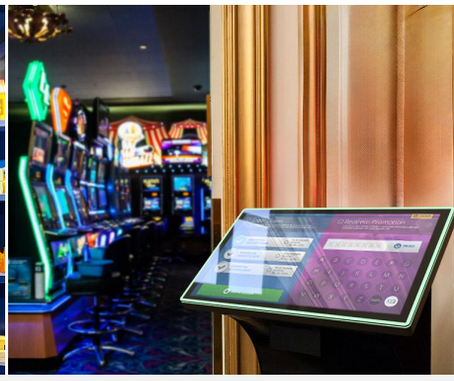

Features & Benefits

- **Add Personality to Your Software**
  Your software deserves a stage. The Aura Series wraps it in mystique and glamour with an LED-framed design that dazzles users—making your service platform instantly recognizable and irresistibly engaging.
- **Build Unforgettable Brand Recognition**
  Customize lighting effects—colors, patterns, speed—to reflect your brand's identity. GT's Aura Series ensures your kiosk doesn't just blend in; it stands out as a trendsetter, leaving a lasting impression on users.
- **Enhance Customer Experience**
  Transform routine transactions (payments, check-ins, check-outs) into memorable moments. The pulsating LED frame creates a warm, inviting atmosphere that turns functional interactions into delightful experiences.
- **Accelerate Deployment**
  Save time with multiple OS compatibility (Android/Windows/Linux) and proven hardware performance. Versatile mounting options (countertop, floor-standing, wall-mount and ceiling-mount) adapt to any environment, slashing setup time and ensuring seamless integration with your existing systems.

SPECIFICATIONS

Product Name	23.8 Inch Android AIO	
Model	ATL24E	
Motherboard Parameters		
SoC	Rockchip, RK3576, Quad-core Cortex-A72 + Quad-core Cortex-A53	
GPU	Mali-G57 MC3	
Memory	8GB	
Storage	64G, eMMC5.1 on board	
Operating System	Android 14	
Wi-Fi & Bluetooth	Onboard Module	
LCD Panel Parameters		
Display Technology	Active Matrix TFT-LCD with LED Backlight	
Aspect Ratio	16:9	
Active Display Area (W x H)	527.0mm x 296.5mm	
Native Resolution	1920 x 1080	
Response Time (Typ.)	16ms	
Display Colors	16.7M	
Luminance (Typ.)	350nits	
Contrast Ratio (Typ.)	3000:1	
Viewing Angle (Typ.)	Horizontal (Left/Right) CR≥10	178° (89°/89°)
	Vertical (Ulp/Down) CR≥10	178° (89°/89°)
Touchscreen Parameters		
Touch Technology	PCAP	
Touch Point	10	
Light Transmission	≥85%	
Thickness	3.0mm ± 0.2mm	

Proudly supported by DCLTEK in the USA WWW.DCLTEK.COM 1-800-407-8917 SALES@DCLTEK.COM

I/O Port	
LAN	2 x RJ45 (10/100/1000Mbps)
USB	4 x USB 3.0 (Type-A)
Display	1 x HDMI out
Storage Expansion	1 x TF card slot
Audio	1 x Headphone connector
Power	1 x DC Jack (Pin Outer Diameter 2.5mm)
Overall Parameters	
Bezel/Case Colour	Black
Mounting Options	VESA 75mm x 75mm, 100mm x 100mm
Outline Dimensions	580.0mm x 352.5.0mm x 60.5mm
Input Voltage Range	12V DC ± 5%
Speaker	2 x 2W Built-in
LED Lights Color	Multicolor
LED Lights Location	4 LED lights bar (Front, Back & Edge)
Power Consumption	TBD
Operating Altitude	≤3000m
Temperature	Operating: 0℃ to 40℃, storage: -20℃ to 60℃
Humidity	Operating: 20% to 80%, storage: 10% to 90%, Non-condensing
Carton Dimensions	685mm x 185mm x 475mm
Weight	TBD
Agency Approvals	FCC、CE
Warranty	2 years

Proudly supported by DCLTEK in the USA WWW.DCLTEK.COM 1-800-407-8917 SALES@DCLTEK.COM