

55-inch


Touch Signage (43", 55")



Effortless Deployment –
Single Power Cord for Seamless Use



Ultra-narrow Black Border –
Immersive Visual Experience

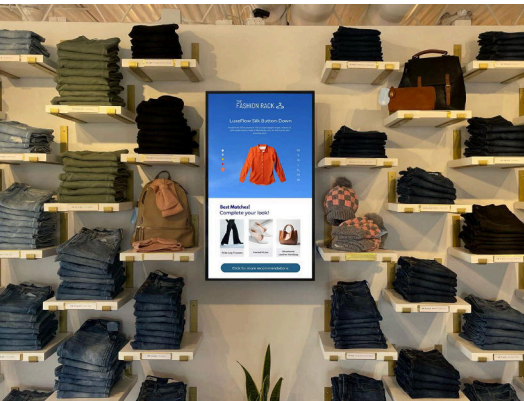

Features & Benefits

- **Multi-OS Backpack PC:** Choose Windows /Android/Linux for tailored performance. It facilitates 30% faster maintenance and its modular design makes it future-proof.
- **Slim 14mm Screen-Borders:** Enjoy 97.1% screen-to-body ratio for immersive viewing which has proven to increase dwell time by 40% in retail environments.
- **UHD/FHD Options:** Increase engagement by 35% with pixel-perfect visuals.
- **Neat Cable Management:** Professional-grade cable routing system reduces installation time by 50% and adds a touch of elegance to its overall appearance.
- **Multi-Touch Operations:** Improve memory encoding by 3.2x when interactions involve touch gestures.
- **Versatile Mounting:** Deploy in any orientation – landscape, portrait, or tabletop – to match your space dynamic and it will still look good.

SPECIFICATIONS

Product Name	55 Inch Touch Signage					
Model	ATL557/CTL557					
Motherboard Parameters						
	Android			Windows		
Processor	Rockchip® RK3568: Quad-core Cortex-A55, up to 2.0GHz	Rockchip, RK3576, Quad-core Cortex-A72 + Quad-core Cortex-A53	Rockchip® RK3588: 4 Cores Cortex-A76 & 4 Cores Cortex-A55	12th Generation Intel® Core™ i3	12th Generation Intel® Core™ i5	Intel® Celeron® J6412: Quad-core, clock speed 2.00 GHz, up to 2.60GHz
GPU	ARM G52 2EE	Mail-G52 MC3	Mali-G610 MC4	Intel® UHD Graphics	Intel® Iris® Xe Graphics eligible	Intel® UHD Graphics for 10th Gen Intel® Processors
Memory	2GB, LPDDR4X (optional: 4GB/8GB)	8GB, SDRAM LPDDR5 Memory Down on board (optional: 4GB)	8GB, LPDDR4X (optional: 4GB)	2* DDR4 SO-DIMM Slot, up to 64GB	2* DDR4 SO-DIMM Slot, up to 64GB	Support DDR4, 1 * non-ECC SO-DIMM Slot, up to 32GB
Storage	16GB, eMMC (optional: 8GB/32GB/64GB/128GB)	64GB, Onboard eMMC 1 x TF Card Reader	128 GB, Onboard eMMC (Optional: 64 GB) 1 x SATA3.0 1 x TF Card Reader	1 x SATA3.0; 1 x M.2 Slot	1 x SATA3.0; 1 x M.2 Slot	1 x SATA3.0; 1 x Mini-SATA
OS Support	Android 11	Android 14/Linux	Android 12	Windows10 /Linux	Windows10 /Linux	Windows10/ Linux
Wi-Fi & Bluetooth	Onboard Module: 2.4GHz/5GHz Wi-Fi+ Bluetooth 4.0(optional: Wi-Fi 6)	Onboard Module: WIFI+ Bluetooth, 2.4GHz/5GHz WIFI+ Bluetooth 5.3	Onboard Module: Wi-Fi 6 /Bluetooth	1 x M.2 Module, optional	1 x M.2 Module, optional	Mini PCI-e Module, optional
I/O Port						
LAN	1 x RJ45 (10/100Mbps)	2 x RJ45 (10/100/1000Mbps)	2 x RJ45 (10/100/1000Mbps)	1 x RJ45 (10/100/1000Mbps)	1 x RJ45 (10/100/1000Mbps)	2 x RJ45 (10/100/1000Mbps)
USB	1 x USB 3.0, 1 x USB OTG	3 x USB 3.0 (Type-A) 1 x USB OTG	2 x USB 3.0 (Type-A)	2 × USB 2.0 (Type-A), 2 × USB 3.0 (Type-A)	2 × USB 2.0 (Type-A), 2 × USB 3.0 (Type-A)	2 x USB 2.0 (Type-A), 2 x USB 3.0 (Type-A)
Display	1 x HDMI out	1 x HDMI out	2 x HDMI out; 1 x HDMI in	1 x HDMI 2.0 out, 1 x VGA out	1 x HDMI 2.0 out, 1 x VGA out	1 x HDMI out
Audio	1 x Headphone connector	1 x Line-out+MIC	1 x 2-IN-1 Headset	1 x 3.5mm Line out, 1 x 3.5mm Mic in	1 x 3.5mm Line out, 1 x 3.5mm Mic in	1 x Line-Out + MIC 2in1 3.5mm Jack
Power	1 x DC 12V	1 x DC 12V	1 x DC 12V	1 x DC 12V	1 x DC 12V	1 x DC 12V

LCD Panel Parameters		
Display Technology	Active Matrix TFT-LCD with LED Backlight	
Aspect Ratio	16:9	
Active Display Area (W x H)	1210.0mm x 682.4mm	
Native Resolution	3840 x 2160	
Response Time (Typ.)	8ms	
Display Colors	1.07G	
Luminance (Typ.)	800nits	
Contrast Ratio (Typ.)	1200:1	
Viewing Angle (Typ.)	Horizontal (Left/Right) CR≥10	178° (89°/89°)
	Vertical (Up/Down) CR≥10	178° (89°/89°)
Touchscreen Parameters		
Touch Technology	PCAP	
Touch Point	10	
Light Transmission	≥85%	
Thickness	4.0mm ± 0.3mm	
Overall Parameters		
Bezel/Case Colour	Silver/Black	
Mounting Options	VESA 800mm x 400mm	
Outline Dimensions	1241.8mm x 716.6.3mm x 109.0mm (W x H x D)	
Input Voltage Range	110V-240V AC	
Speaker	2 x 5W Built-in, optional	
Power Consumption	TBD	
Operating Altitude	≤3000m	

Temperature	Operating: 0°C to 40°C, storage: -20°C to 60°C
Humidity (Non-condensing)	Operating: 20% to 80%, storage: 10% to 90%
Carton Dimensions	TBD
Weight	TBD
MTBF	50,000 Hours Demonstrated
Warranty	2 years

Note: For ordering information on specific models, please contact the sales team.



Go to www.generaltouch.com for more products and information, or contact us.
General Touch Co., Ltd. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products.

Tel: 0086-28-85124120
Fax: 0086-28-85124115
E-mail: info@generaltouch.com
<http://www.generaltouch.com>